

Zone Valve Kit

332141E
EN

Used to control when various zones or sections of a lubrication system receive lubricant.
For professional use only.

Part No.:

24P976 - Zone Valve, 24 VDC, NO

24T296 - Zone Valve, 24 VDC, NC

Maximum Working Pressure: 3500 psi (24.1 MPa, 241 bar)




Important Safety Instructions

Read all warnings and instructions in this manual and the pump instruction manual included with your unit. Save all instructions.

NOTICE

All user supplied tubing must be rated for the same pressure or equipment could be damaged.

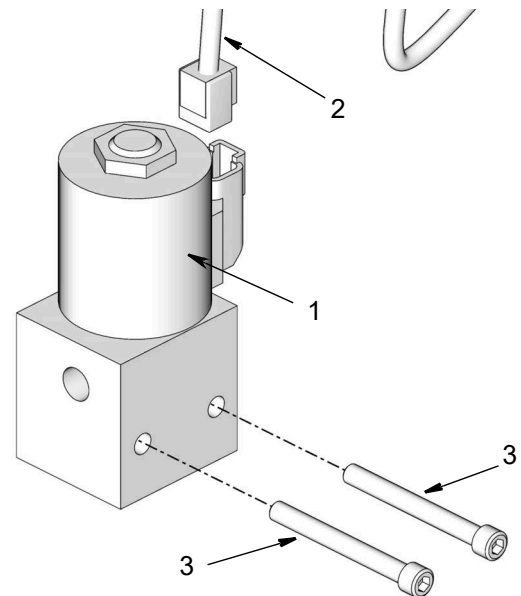

Kit Parts:

Ref.	Description	24P976		24T296	
		Part No.	Qty.	Part No.	Qty.
1	VALVE, zone, 24 VDC, NO	124575	1	-	-
	VALVE, zone, 24 VDC, NC	-	-	124349	1
2	CABLE, 6 ft, vent valve, 2 pin	24N402	1	24N402	1
3	SCREW, cap, socket	C19817	2	C19817	2

Installation

Pressure Relief Procedure



Follow the Pressure Relief Procedure whenever you see this symbol.




SKIN INJECTION HAZARD

High-pressure fluid from dispense device, hose leaks, or ruptured components will pierce skin. This may look like just a cut, but it is a serious injury that can result in amputation. **Get immediate surgical treatment.**

Follow **Pressure Relief Procedure** in this section, when you stop dispensing and before cleaning, checking, or servicing equipment.

Relieve pressure in system by loosening the fittings at the outlet and inlet of the zone valve.

Assembly



Reference numbers used in the following instructions correspond to parts included in the kit and are provided on page 1.

1. Relieve pressure if unit has already been in service and disconnect power source.
2. Mount the manifold to a fixed surface using mounting holes (a) and two socket screws (3). (FIG. 1)





FIG. 1

3. Connect the pressurized supply line (b) to the inlet fitting (c) of the zone valve (marked "I"). Tighten with wrench. (FIG. 2)

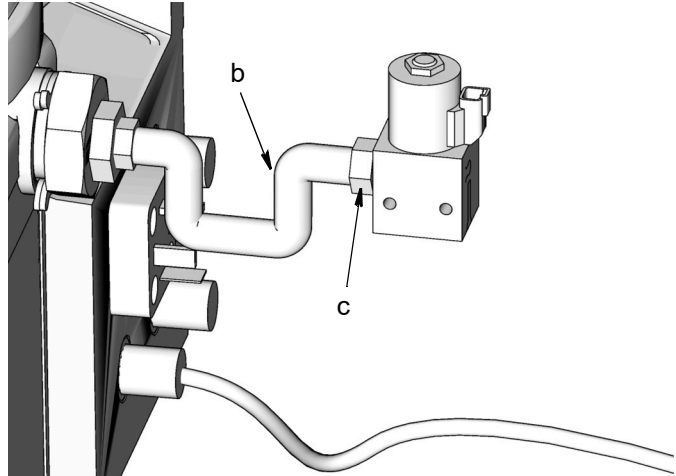


FIG. 2

4. Connect the main tube (d) to the zone valve outlet (e) (stamped with an "O") and the lubricator inlet fitting (f). (FIG. 3)

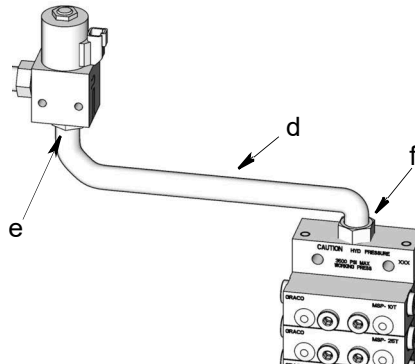


FIG. 3

5. Connect the end of the cable (2) to the lube system controller.
6. Connect cable (2) to the solenoid valve (g). (FIG. 4)

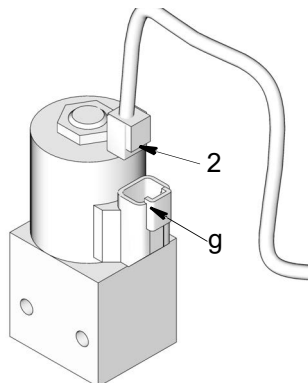


FIG. 4

Normally Open: Model 24P976

The valve must receive power to close the zone, preventing lubricant from flowing into the lube system metering device.

Normally Closed: Model 24T296

The valve must receive power to open the zone to allow lubricant to flow into the lube system metering device.

Retrofitting - Existing Installations



NOTE: These instructions assume grease is already loaded in the lubrication system



Installation

1. Disconnect power source.
2. Relieve pressure, page 2.
3. Remove existing plumbing installed between pressure supply and lubricator inlet.
4. Continue installation following Assembly Instructions, Steps 2 - 6, on pages 2 - 3.

Technical Data

Zone Valve Kit	US	Metric
	Maximum Operating Pressure	3500 psi
Temperature Range	-40°F to 250°F	-40°C to 120°C
Output: 24T296	See Performance Chart	
Output: 24P976	See Performance Chart	
Voltage	24 VDC	
Current	0.8 Amp	
Power	18.2 Watt	
Inlet/Outlet	1/4 in. npt	
Wetted Parts	Carbon Steel, Buna-N rubber	
Recommended Fluids	Grease N.L.G.I. grades #000 - #2	
Dimensions	See below	
Electrical Connections	Deutsch DT Series 2 Pin	
Ratings	IP69K	

Performance Charts

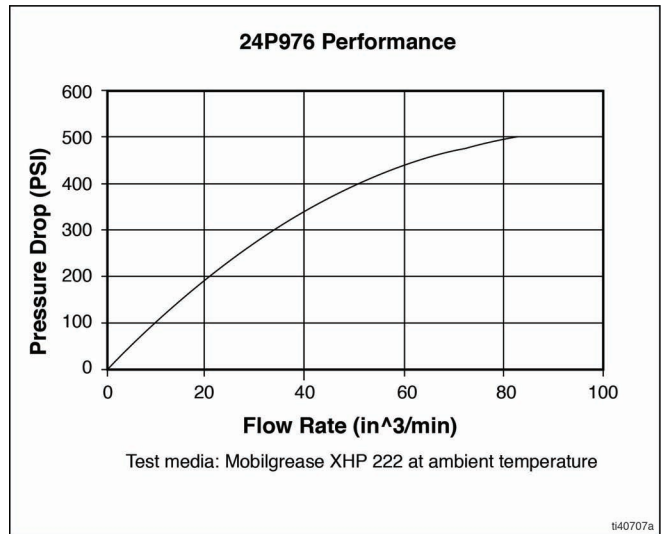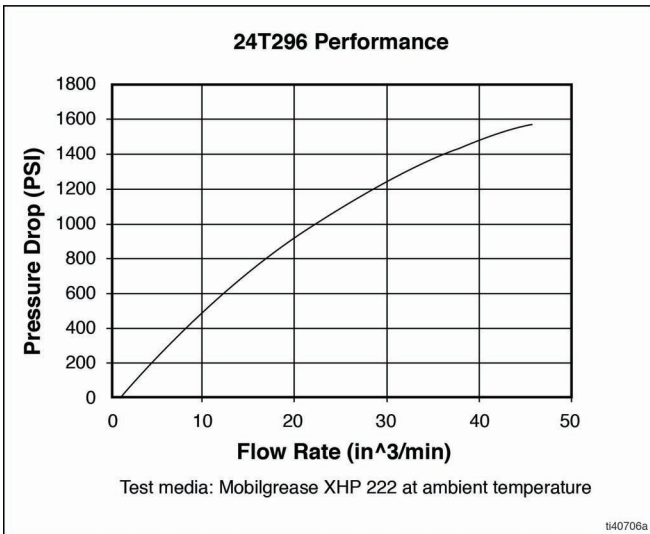

California Proposition 65


CALIFORNIA RESIDENTS

⚠ WARNING: Cancer and reproductive harm – www.P65warnings.ca.gov.

Dimensions

inches (mm)

NOTE: 24P976 is a normally open valve and is not recommended for use with oil and a pump that outputs less than 1.5 cu. in./min.

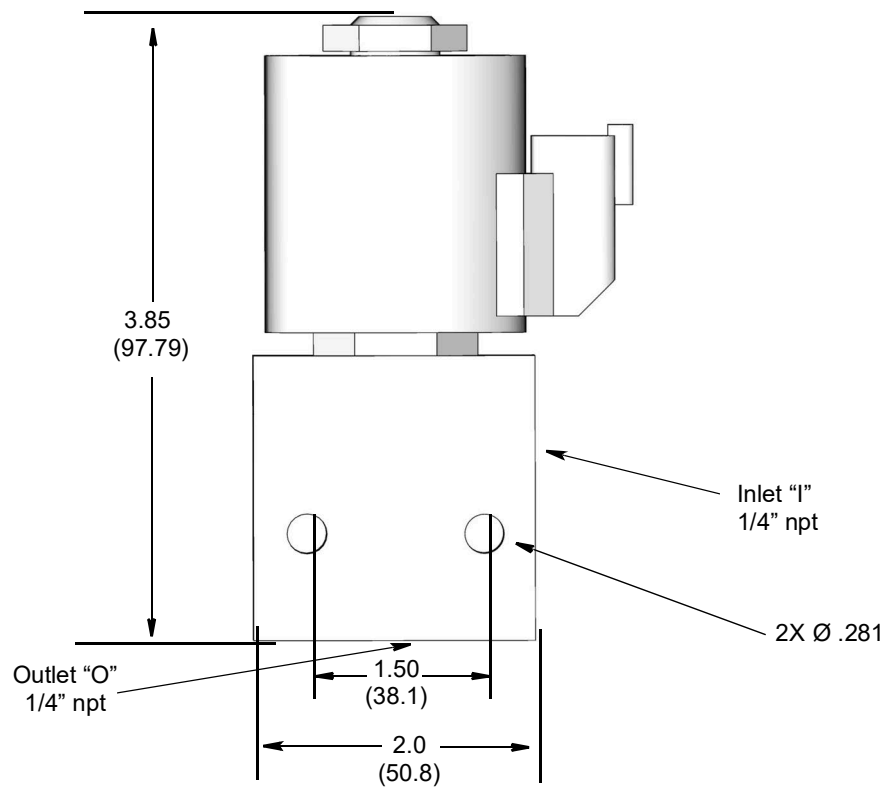

Graco Standard Warranty

Graco warrants all equipment referenced in this document which is manufactured by Graco and bearing its name to be free from defects in material and workmanship on the date of sale to the original purchaser for use. With the exception of any special, extended, or limited warranty published by Graco, Graco will, for a period of twelve months from the date of sale, repair or replace any part of the equipment determined by Graco to be defective. This warranty applies only when the equipment is installed, operated and maintained in accordance with Graco's written recommendations.

This warranty does not cover, and Graco shall not be liable for general wear and tear, or any malfunction, damage or wear caused by faulty installation, misapplication, abrasion, corrosion, inadequate or improper maintenance, negligence, accident, tampering, or substitution of non-Graco component parts. Nor shall Graco be liable for malfunction, damage or wear caused by the incompatibility of Graco equipment with structures, accessories, equipment or materials not supplied by Graco, or the improper design, manufacture, installation, operation or maintenance of structures, accessories, equipment or materials not supplied by Graco.

This warranty is conditioned upon the prepaid return of the equipment claimed to be defective to an authorized Graco distributor for verification of the claimed defect. If the claimed defect is verified, Graco will repair or replace free of charge any defective parts. The equipment will be returned to the original purchaser transportation prepaid. If inspection of the equipment does not disclose any defect in material or workmanship, repairs will be made at a reasonable charge, which charges may include the costs of parts, labor, and transportation.

THIS WARRANTY IS EXCLUSIVE, AND IS IN LIEU OF ANY OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO WARRANTY OF MERCHANTABILITY OR WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE.

Graco's sole obligation and buyer's sole remedy for any breach of warranty shall be as set forth above. The buyer agrees that no other remedy (including, but not limited to, incidental or consequential damages for lost profits, lost sales, injury to person or property, or any other incidental or consequential loss) shall be available. Any action for breach of warranty must be brought within two (2) years of the date of sale.

GRACO MAKES NO WARRANTY, AND DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, IN CONNECTION WITH ACCESSORIES, EQUIPMENT, MATERIALS OR COMPONENTS SOLD BUT NOT MANUFACTURED BY GRACO. These items sold, but not manufactured by Graco (such as electric motors, switches, hose, etc.), are subject to the warranty, if any, of their manufacturer. Graco will provide purchaser with reasonable assistance in making any claim for breach of these warranties.

In no event will Graco be liable for indirect, incidental, special or consequential damages resulting from Graco supplying equipment hereunder, or the furnishing, performance, or use of any products or other goods sold hereto, whether due to a breach of contract, breach of warranty, the negligence of Graco, or otherwise.

FOR GRACO CANADA CUSTOMERS

The Parties acknowledge that they have required that the present document, as well as all documents, notices and legal proceedings entered into, given or instituted pursuant hereto or relating directly or indirectly hereto, be drawn up in English. Les parties reconnaissent avoir convenu que la rédaction du présente document sera en Anglais, ainsi que tous documents, avis et procédures judiciaires exécutés, donnés ou intentés, à la suite de ou en rapport, directement ou indirectement, avec les procédures concernées.

Graco Information

For the latest information about Graco products, visit www.graco.com.

For patent information, see www.graco.com/patents.

TO PLACE AN ORDER, contact your Graco distributor or call to identify the nearest distributor.

Phone: 612-623-6928 or **Toll Free:** 1-800-533-9655, **Fax:** 612-378-3590

All written and visual data contained in this document reflects the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

For patent information, see www.graco.com/patents

Original instructions. This manual contains English. MM 332141

Graco Headquarters: Minneapolis

International Offices: Belgium, China, Japan, Korea

GRACO INC. P.O. BOX 1441 MINNEAPOLIS, MN 55440-1441

Copyright 2013, Graco Inc. is registered to ISO 9001

www.graco.com

Revision E, May 2022