

VEHICLE SERVICE EQUIPMENT

Buyer's Guide



MOVING MATERIALS THAT MATTER™



TABLE OF CONTENTS

	Page
About Graco	4-6
Graco Resources	6
Fluid Management Systems	
Fluid Management System Selection Guide	9
Benefits of Pulse [™] Pro Fluid Management	10
Steps to Build Your Pulse Pro System	11
Pulse Hub	12-13
Pulse Dispense Meter	14-15
Pulse Tank Level Monitor (TLM)	16
Pulse Pump Air Control (PAC)	17
Pulse Extender and Remote Extender	18
Pulse Roll Around Package and Accessories	19
Pulse Asset	20-21
Steps to Build Your Pulse FC System	22
Pulse FC Software	23
Pulse FC Starter Kit	24
SD [™] Preset Dispense Meters	25-26
Pulse FC Packages and Accessories	27
Pulse Level Fluid Management	28-30
Fluid Defender [®]	31
Traditional Box – Wired Fluid Control Components	32
Oil Pumps	
Oil Pump Selection Guide	34-35
Fast-Ball [®] 100 Oil Pumps	36-37
LD Series [™] Oil Pumps	38-53
LD Series [™] Oil Pump Accessories	54-55
Mini Fire-Ball [®] 225 Oil Pumps	56-59
Fire-Ball [®] 300 Oil Pumps	60-64
Fire-Ball [®] 425 Oil Pumps	65-68
Oil Pump Accessories	69-74
NXT [™] High-Flo [®] Oil Pumps	75-77
NXT Dura-Flo [®] Oil Pumps	78-81
Dyna-Star [®] Hydraulic Oil Pumps	82-83
Power-Star [®] Hydraulic Oil Pumps	84-85
Manually Operated Oil Pumps	86-87
Oil Meters	
Graco Dispense Meters	90
LDP5 Electronic Preset Meters	91-93
EM [®] Series Electronic Meters	94-96
PM [®] Series Electronic Meters	97-99
SD Series [™] Electronic Meters	100-102
IM20 In-Line Electronic Meter	103
IM20P [®] In-Line Electronic Meter	104
SDI15 In-Line Electronic Meter	105
Mechanical Meters	106-108
SDV15 Control Valve	109-110
XDV20 Control Valve	111-112
Dispense Consoles	113-114
Grease Pumps	
Grease Pump Selection Guide	116-117
LD Series [™] Grease Pumps	118-122
LD Series [™] Grease Pump Accessories	123-124
Mini Fire-Ball [®] 225 Grease Pumps	125-128
Fire-Ball [®] 300 Grease Pumps	129-136
Fire-Ball [®] 425 Grease Pumps	137-143
Grease Pump Accessories	144-147
GT 750 36:1 Grease Pumps	148-149
NXT [™] Check-Mate [®] Grease Pumps	150-154
Dyna-Star [®] Hydraulic Grease Pumps	155-156
Manually-Operated Grease Pumps	157
Grease Dispense Valves and Guns	
Dispense Valve and Gun Selection Guide	158
Accu Shot [™] Metered Grease Valve	159
Pro Shot [™] Non-Metered Valve	160
Power Shot [™] Booster Valve	161
Heavy-Duty Grease Guns	162
Accessories	163-165

Diesel Exhaust Fluid (DEF) Systems

How to Choose Your Graco DEF Solution	168
LD Blue Electric Pumps and Packages	169-171
SD Blue AODD Pumps and Packages	172-174
LD Blue Manual Pumps	175
DEF Meters	176-177
DEF Dispense Nozzles	178-179
DEF Hose Reels	180-181
DEF System Accessories	182-184

Specialty Pumps

Diaphragm Pump Selector	186
Husky 1050 AODD Pump	187-188
Husky 307 AODD Pump	189
Husky 515 AODD Pump	190
Husky 716 AODD Pump	191
Husky 1590 AODD Pump	192
Husky 2150 AODD Pump	193
Husky 3300 AODD Pump	194
Diaphragm Pump Packages	195-196
Diaphragm Pump Accessories	197-198
Undercoating and Rustproofing Pumps	199-201
Bulldog [®] 43:1 Oil Pump	202-203
Fast-Flo [®] 1:1 Pumps	204-207
EGP [™] Transfer and EGP [™] On-Demand Pumps	208-210

Hose and Cord Reels

Hose Reel Selection Guide	212
LDX [™] Series Hose Reels	214-215
SDX [™] Series Hose Reels	216-221
SD [™] Series Cord and Light Reels	222-225
XDX [™] Series 10/20 Hose Reels	226-230
XD [™] Series 30 Hose Reels	231-235
XD [™] Series 40/50 Hose Reels	236-241
XD [™] Series 60/70/80 Powered Hose Reels	242-246
Hose Reel Accessories	247-250

Fluid Reclaim Equipment

Oil King [™]	252
Coolant King [™]	253
Oil Ace [™]	254-256
16-Gallon Mobile Receiver	257
Big Hauler [™] Truck Drain	258
Diaphragm Evacuation Pumps	259
Evacuation Pump Packages	260-262
Fluid Reclaim Accessories	263-265

Accessories

Air Regulators and Valves	268
Air Valves	269
Hose Fittings	270
Lubrication Hoses	271
Air/Water Hoses	272
Quick Connect Fittings	273
Adapters and Fittings	274-275

Warranty Information

.....	276-278
-------	---------

Index

.....	279-286
-------	---------

ABOUT GRACO

100 YEARS OF MOVING MATERIALS THAT MATTER – TOGETHER

For a century, Graco has partnered with customers to solve complex challenges and deliver trusted solutions. From the first air-powered grease gun to today's smart, sustainable systems, our commitment to innovation and quality has never wavered. This centennial marks a legacy of collaboration, reliability, and progress. As your needs evolve, so do we – investing in technology, expanding our capabilities and staying focused on what matters most: helping you succeed.

Thank you for being part of our journey. The next 100 years start now – and we're honored to move forward with you.



A History of Innovative Lubrication Solutions

The Gray brothers launched Graco to manufacture and market an air-powered, portable lubricator invented by Russell Gray while he was working as a parking lot attendant. The idea emerged as he struggled with a manual grease gun in freezing Minneapolis temperatures that turned grease into thick sludge. Over time, growing demand for lubrication equipment pushed the brothers to develop larger, specialized lubricators. Graco soon became a leader in the lubrication equipment industry.





Today, Graco manufactures equipment to monitor, control, manage and dispense fluids, providing innovative solutions for vehicle service, industrial and automatic lubrication needs. Our commitment is to keep your equipment running at peak performance.

Graco automatic lubrication solutions deliver optimal machine performance by lubricating key wear points with the right amount of lubricant, at the right time and in the right location. Graco offers automatic lubrication solutions for industrial, on-road mobile, off-road mobile and energy applications, among others. From light-duty uses to high-performance systems designed for heavy-duty jobs, Graco equipment is known for rugged, durable, long-life design.

Whether servicing vehicles, operating heavy equipment, performing maintenance repairs, working on an oil rig or running manufacturing lines, customers rely on Graco as a trusted source to help maximize profitability every time.



DID YOU KNOW?

Graco also manufactures and sells a complete line of automatic lubrication systems and accessories!



Keep your equipment running at peak performance. Graco automatic lubrication solutions give you the ultimate machine performance by lubricating key wear points – the right amount of lubricant, at the right time, in the right location. Graco has automatic lubrication solutions for the industrial, on-road mobile, off-road mobile, energy industries and more.



Visit graco.com/autolube

Graco Resources

Graco has developed tools and resources to help educate and better serve our distribution channel. Check them out today:




Graco Sales Book

Stay up-to-date with the newest information from Graco by downloading the Graco Sales Book App.

Graco Sales Book is an innovative mobile application, designed to give Distributors access to Graco product information, including brochures, instruction manuals, videos and training documents – all on your mobile device.

Download today by visiting salesbook.graco.com




Graco University

Graco University is an e-learning module that can be accessed online, anytime, and contains assets that help educate you on Graco products.

This innovative online learning program gives the tools to stay on the leading edge with a variety of resources such as virtual and instructor led courses, online books, live and on-demand video presentations, and much more.

Learn more today at training.graco.com



Graco Gear

Graco Gear is your one-stop shop for branded merchandise and other tools that will help you build customer relationships.

Order shirts, hats, banners, and more whenever you need! You can even add your logo for a small fee. Most orders ship next day.

Start shopping today at gracogear.com



FLUID MANAGEMENT SYSTEMS

	Page
Fluid Management System Selection Guide	9
Benefits of Pulse® Pro Fluid Management	10
Steps to Build Your Pulse Pro System	11
Pulse Hub	12-13
Pulse Dispense Meter	14-15
Pulse Tank Level Monitor (TLM)	16
Pulse Pump Air Control (PAC)	17
Pulse Extender and Remote Extender	18
Pulse Roll Around Package and Accessories	19
Pulse Asset	20-21
Steps to Build Your Pulse FC System	22
Pulse FC Software	23
Pulse FC Starter Kit	24
SD™ Preset Dispense Meters	25-26
Pulse FC Packages and Accessories	27
Pulse Level Fluid Management	28-30
Fluid Defender	31
Traditional Box – Wired Fluid Control Components	32



GRACO

0-30 meter

0.000
QUARTS

ACTIVATE



FLUID MANAGEMENT SYSTEM SELECTION GUIDE




CHOOSING A GRACO FLUID MANAGEMENT SOLUTION

FEATURE	TRADITIONAL BOX	PULSE FC	PULSE PRO	PULSE ASSET
CONTROL. Regulate the amount of fluid that's dispensed to reduce spillage and waste.				
Allow control of dispenses	•	•	•	•
Restrict the quantity of fluid	•	•	•	•
Ensure correct amount of fluid	•	•	•	•
METERS. Put control into the hands of your technicians and maintenance teams so they can be more productive, accurate and accountable.				
Works with petroleum, synthetic based oils, antifreeze	•	•	•	•
Works with windshield wash solvent	•		•	•
Meter displays quantity dispensed		•	•	•
Fluid measured at dispense point (highly accurate)		•	•	•
Record dispenses offline then sync to HUB when connected				•
INSTALLATION. Seamless integration simplifies dispenses without compromising workflows or productivity.				
Works with oil bar	•	•	•	•
Wire-free installation		•	•	•
Wireless communication			•	•
Pump air control (PAC)	•		•	•
FLEXIBILITY. Accommodate emerging demands to maintain or expand productivity and profitability.				
Works with mobile roll-around packages		•	•	•
Easy expansion with additional fluids		•	•	•
Easy upgrade to comprehensive fluid management		•	N/A	N/A
USER INTERFACE. Access the information necessary to make more informed decisions quickly.				
Simple PC-based software		•		
No software to install			•	•
Accessible from any PC, phone or tablet			•	•
FLUID MANAGEMENT. Improve accountability for your entire operations.				
Track dispenses by invoice, work order or asset			•	•
Track dispenses by technician			•	•
Record fluid type and quantity dispensed			•	•
Keeps technician in service bay			•	
FLUID INVENTORY. Simplify how you re-order and store inventory to minimize delays.				
Monitor tank levels (TLM)			•	•
Dealer Management Solution (DMS) integration			•	•
REPORTING. Capture critical information and insights to simplify decision-making.				
Print on dispense			•	•
Automated customizable reports			•	•
Automated alerts to simplify inventory tasks			•	•
Software updates		•	•	•
Permanent record of all dispenses or authorizations		•	•	•

PULSE® PRO FLUID MANAGEMENT

Pulse® Pro Fluid Management simplifies how forward-thinking shops track and manage bulk fluids in real time – adding more transparency and accountability to drive productivity and profitability.

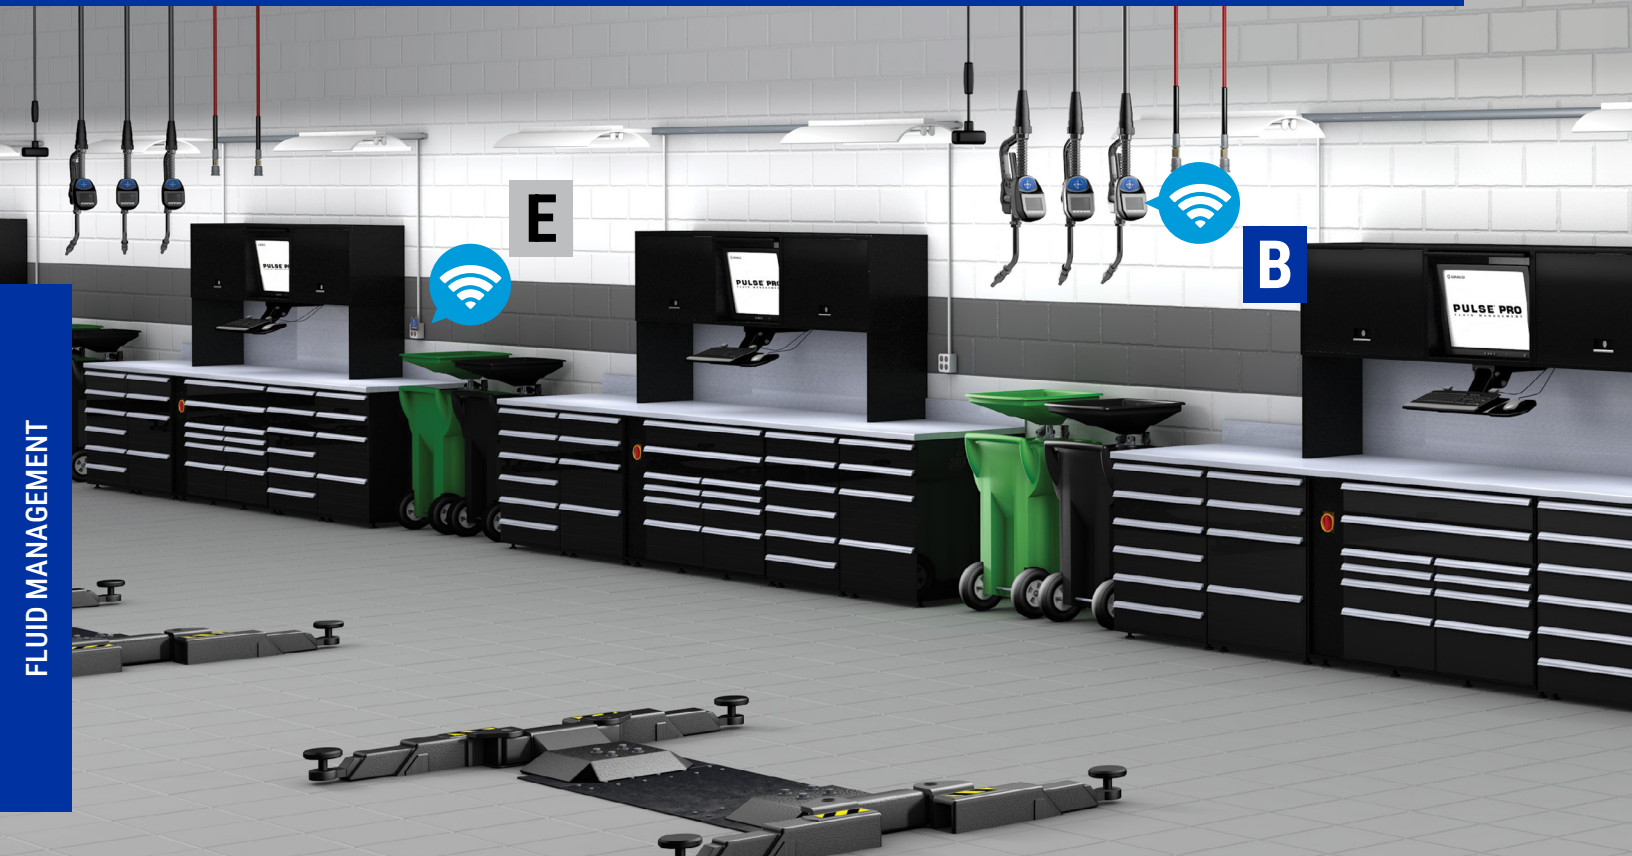

BENEFITS OF PULSE PRO FLUID MANAGEMENT




Transparency. Monitor every drop, every time – automatically – and minimize shrinkage, rounding and discrepancies.



Accountability. Track issues to the source via advanced technology, including automated alerts and customizable reports.



Integration. Capture data, integrate it with popular DMSs and share it with other stakeholders quickly.



Portability. Pair with mobile dispense units and drums easily to reduce extra steps and hassles for technicians.



Scalability. Add Pulse into almost any environment quickly, and even retrofit applications or multiple buildings within the same facility.



Accurate billing. Automatically assign every ounce of fluid directly to a work order to simplify billing and maximize profit margins.



Simplicity. Avoid surprises, interruptions and delays. Fluids are tracked and recorded instantly and automatically.



Inventory management. Monitor fluid inventory and schedule refills to minimize delays and excessive costs.



FLUID MANAGEMENT

STEPS TO BUILD YOUR PULSE PRO SYSTEM:

A Hub with Software

1 REQUIRED

B Add Meters

MINIMUM 1 REQUIRED

ADD ACCESSORIES

C Tank Level Monitor (TLM)

Tank Level Monitor can be used as a standalone product.

OPTIONAL

D Pump Air Controller (PAC)

OPTIONAL

E Pulse Extender and Pulse Remote Extender

OPTIONAL

F Roll Around Package

OPTIONAL

G Oil Bar Dispenser

OPTIONAL

H Pulse Universal Controller

OPTIONAL


PULSE® PRO FLUID MANAGEMENT

A PULSE HUB

Simply connect the Pulse Hub to a power source and access your local network to get started. The self-contained device includes everything necessary for users to access monitoring and reporting tools instantly from any network-connected PC, tablet or smartphone.

PULSE SOFTWARE

Pulse Pro Fluid Management software is pre-installed on the Pulse HUB and focused on simple intuitive design with powerful information at your fingertips. Get a quick consolidated view of all dispenses for the entire shop via specifically designed web page and easy-to-use software. Track tank levels at a glance. Generate customizable reports and automated e-mail alerts to share critical information with other key decision-makers. For further efficiency and automation, Pulse software can be integrated with your DMS through Pulse standard integrations or our generic third-party interface.

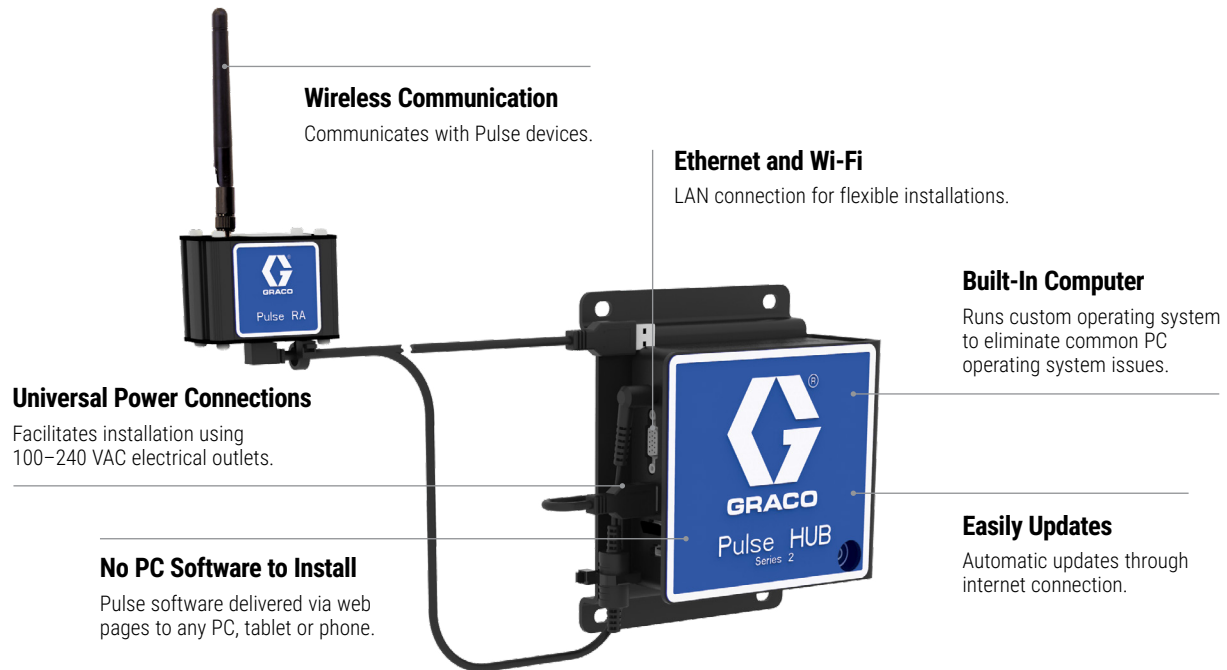

Features and Benefits

- No PC software to install – Pulse Hub generates a local web page
- Responsive web design – Use any-size screen, from a PC to a phone
- Consolidated dispense queue – Find everything you need in one convenient table
- Advanced reporting – Create and schedule automated reports to track history and fluid usage
- Informative and preventive alerts – The software offers over two dozen alert activities
- Automatic software updates – Software notifies you when updates are ready to install

TECHNICAL SPECIFICATIONS

Weight	1.45 lb (660 gm)
Power Supply	
Input Power	100–240 VAC line voltage (0.05 A)
To Hub	5 VDC (0.5 amps)
Warranty	Two years electronics

A ORDERING OPTIONS

Part Number	Description
25U972	Hub for non-CE installation with global power adapter



DMS INTEGRATION OPTIONS FOR PULSE PRO

An integration, put simply, is the communication between two separate business systems. Pulse uses integrations to provide enhanced control and monitoring for fluid dispenses.

OPTION 1 – PARTNER INTEGRATIONS

- 
 - Requires FleetFocus: FA or M5 with FluidFocus Module
 - Communication through Enterprise Asset Management System

- 
 - Requires CDK Drive DMS
 - Communication through CDK's Third-Party Access Program

- 
 - Requires Dealertrack DMS
 - Communication through Dealertrack's Opentrack API

- 
 - Requires Excede v9.22+ with Excede Database
 - Communication through Excede API v2.0


- 
 - Requires PBS DMS
 - Communication through PBS Partner Hub

- 
 - Requires ERA
 - Communication through RCI Web Service

OPTION 2 – COMMUNICATION THROUGH GRACO THIRD PARTY INTERFACE




- Requires End-user developed integration for non-supported DMS

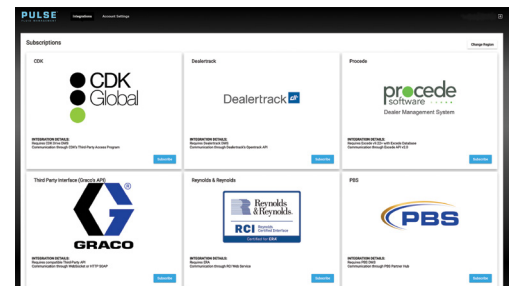

FLUID MANAGEMENT

HOW IT WORKS

The interface to business systems or DMS provides two important basic functions:

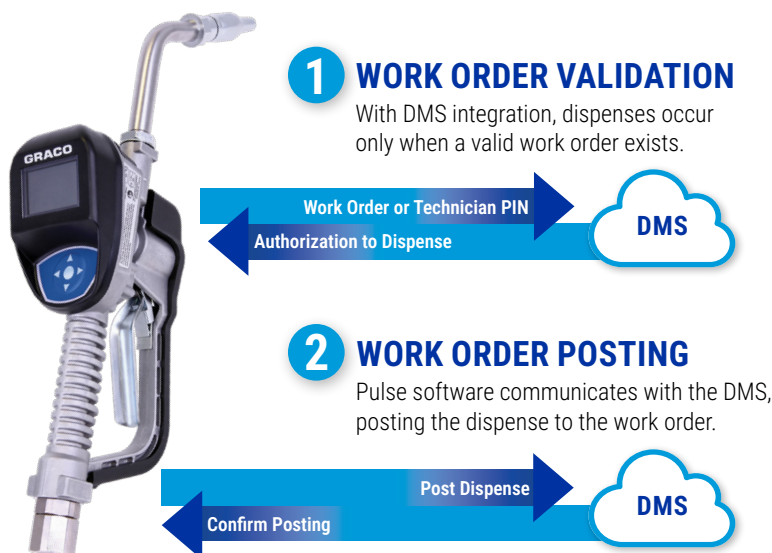

ORDERING OPTIONS

INTERFACE ACTIVATION CODES

Part Number	Description
25R975	Pulse software with CDK Global Drive
25R976	Pulse software with Dealertrack
25R977	Pulse software with AssetWORKS
25R978	Pulse software with Reynolds & Reynolds
25R979	Pulse software with Procede Software – 2nd site
25R980	Pulse software with Procede Software
25R981	Pulse software with PBS

PULSE® PRO FLUID MANAGEMENT

B PULSE DISPENSE METER

The dispense meter is durable and easy to use, giving technicians everything they need at their fingertips. PINs and other data can be entered in moments via a larger, more intuitive display. NFC tags can be used for immediate PIN entry and faster access to work orders.

Large, Intuitive Display

High-contrast display for low- and bright-light conditions.

Long Battery Life

Uses four off-the-shelf AA batteries – easy to replace.

Faster PIN Entry

Built-in NFC reader and simple, efficient controls.

Fluid Extension Kits

Choose from rigid, flexible or gear lube extensions with automatic flush-mount nozzle design.

Ergonomic Design

Lower button placement.

Wireless Communication

Communicates dispense information with Hub.

Long-Life Valve Design

Cartridge design for long life and easier repair.

Protective Trigger Guard

Prevents accidental dispenses.



TECHNICAL SPECIFICATIONS

Flow Range*	0.25 to 18 gpm (0.9 to 68 lpm)
Maximum Working Pressure	1,500 psi (103.4 bar)
Units of Measure (factory set to quarts)	Pints, quarts, gallons, liters
Weight	5.3 lbs (2.4 kg)
Inlet	1/2 in NPT or 3/4 in NPT
Outlet	3/4 in straight thread O-ring boss
Dimensions (without extension) – L x W x H	13 in x 3.75 in x 5.75 in (33 cm x 9.5 cm x 14.6 cm)
Maximum Recorded Dispense	999.99 units
Operating Temperature Range	4°F to 158°F (-16°C to 70°C)
Storage Temperature Range	-40°F to 158°F (-40°C to 70°C)
Battery**	4 AA alkaline or lithium batteries
RF Frequency Band	2,400 to 2,483.5 MHz
Maximum RF Transmit Power	8 dBm
Wetted Parts	Aluminum, stainless steel, PBT, nitrile rubber, zinc-plated carbon steel, nickel-plated carbon steel
Fluid Compatibility	Antifreeze, gear oil, crankcase oil, ATF, windshield wash (up to 50% alcohol-based solutions)
Meter Accuracy†	+/- 0.5 percent
Warranty	Five year structural, 3 years electronics, 1 year wear components

*Tested in 10W motor oil. Flow rates vary with fluid pressure, temperature and viscosity.

**Battery required to meet life expectancy: Energizer® Alkaline E91.

†At 2.5 gpm (9.5 lpm), at 70°F (21°C), with 10W oil and 1 gallon dispensed. May require calibration; out-of-box accuracy is +/- 1.25 percent.



B ORDERING OPTIONS

8 GPM (30 LPM) METERS








Fluid	Extension	Nozzle	Size (in)	Part Number
Oil	Flexible	Automatic Quick-Close	1/2	25M319
	Rigid			25M317
	Semi-Rigid			2009326
Antifreeze	Flexible	Manual Antifreeze		25M320
	Rigid			25M318
Gear Lube	Gear Lube	Manual		25M326
Windshield Wash	Rigid	None		25M328

18 GPM (68 LPM) METERS


Fluid	Extension	Nozzle	Size (in)	Part Number
Oil / Antifreeze	Flexible	Manual High-Flow	1/2	25M324
	Rigid			25M323
	Flexible	Manual High-Flow	3/4	25M330
	Rigid			25M329

ACCESSORIES

NOZZLE AND EXTENSION KITS

	Extension	Fluid	Nozzle Description	Part Number	Compatible Meters
	Rigid	Oil	Automatic, non-drip, quick-close	255852	Pulse 8 gpm
		Antifreeze	Non-drip, quick-close	26C267	Pulse 8 gpm
		Oil/Antifreeze	High-flow, non-drip, quick-close	255857	Pulse 18 gpm
Image to come	Semi-Rigid	Oil	Automatic, non-drip, quick-close	2004991	Pulse 8 gpm
	Rigid	Gear lube	Non-drip, quick-close	255854	Pulse 8 gpm
	Flexible	Oil	Automatic, non-drip, quick-close	255853	Pulse 8 gpm
		Antifreeze	Non-drip, quick-close	26C268	Pulse 8 gpm
		Oil/Antifreeze	High-flow, non-drip, quick-close	255858	Pulse 18 gpm
	Nozzle Only	Oil	Automatic, non-drip, quick-close	17R220	Pulse 8 gpm
		Antifreeze	Non-drip, quick-close	17T207	Pulse 8 gpm
		Oil/Antifreeze	High-flow, non-drip, quick-close	255461	Pulse 18 gpm
	Nozzle Only	Gear lube	Non-drip, quick-close	255470	Pulse 8 gpm
	Flexible	Oil/Antifreeze	Extension only, 2 ft length	131733	Pulse 8 gpm
	Rigid	Windshield wash	Extension, nozzle	273079	Pulse 8 gpm







NFC TAGS

	Part Number	Description
	131462	NFC tags for user identification with meter. 25-pack, blue.

PULSE METER FILTER KITS

Part Number	Description
25D906	Filter kit includes filters/strainers (15M308) and O-rings (155332)

SWIVEL COVERS / IMPACT PROTECTION

	Part Number	Description
	15T366	Black swivel cover (standard color with meter)
	15T367	Red swivel cover
	15T368	Blue swivel cover
	15T369	Green swivel cover
	15T370	Yellow swivel cover
	131226	Pulse / SD meter boot

PULSE® PRO FLUID MANAGEMENT

C PULSE TANK LEVEL MONITOR (TLM)

Measure your largest tanks accurately with minimal effort. The monitor's ultrasonic sensor records the tank level and can be configured to e-mail a daily report to key stakeholders detailing tank volumes, low- or high-level warnings and more.

Simple Wireless Setup

Automatic network identification.

Built-In Display

Real-time level visible from built-in display.

Long Battery Life

Allows for remote installations. Uses four off-the-shelf AA batteries – easy to replace.

Supports Multiple Tank Shapes

Ability to input strapping table for any tank shape.



Tough Exterior

Sealed enclosure to accommodate outdoor usage.

On-Demand Readings

Ability to take reading at any time.

Compact Design

Easily fits into more spaces.

C ORDERING OPTIONS

Part Number	Description
2007428	Tank Level Monitor (TLM)

TECHNICAL SPECIFICATIONS

Ultrasonic Tank Depth Measurement range (Not for use in pressurized tanks)	5 in to 13 ft (12.7 cm to 3.96 m)
Fluid Level Measurement Accuracy	+/- 1.8 in (4.57 cm)
Mounting	1.5 in and 2 in threaded NPT connector (Adapter for BSPP and BSPT thread options available)
Weight (with batteries installed)	1.25 lb (567 g)
RF Frequency Band	2,400 to 2,483.5 MHz
Operating Temperature Range (Display will not function below 32°F [0°C])	-4°F to 140°F (-20°C to 60°C)
Storage Temperature Range	-40°F to 185°F (-40°C to 85°C)
Batteries	Four AA alkaline
Enclosure	IP65
RF Communication	2,400 to 2,483.5 MHz
Vertical Tanks	
Maximum Volume	999,999 gal (999,999 l)
Maximum Height	13 ft (3.96 m)
Cylindrical Tanks	
Maximum Volume	999,999 gal (999,999 l)
Maximum Height	13 ft (3.96 m)
Maximum Length	13 ft (3.96 m)
Maximum Width	13 ft (3.96 m)
Fluid Compatibility	Automatic transmission fluid, antifreeze, window wash, coolant, waste water
Warranty	Two years electronics



D PULSE PUMP AIR CONTROL (PAC)

Prevent unauthorized access to fluid inventory. Pump air supply is shut off automatically after the dispense, preventing spills and expensive cleanup if a broken line occurs. Pump operation is enabled only when a dispense has been activated from the meter.



D ORDERING OPTIONS

Part Number	Description
24Z728	NPT with NEMA 5-15 plug

TECHNICAL SPECIFICATIONS

Minimum Operating Pressure	36 psi (0.25 MPa, 2.5 bar)
Maximum Operating Pressure	145 psi (1.0 MPa, 10 bar)
Maximum Air Flow	93 SCFM (2.6 m ³ /min)
Power Supply	100–240 VAC line voltage, 24 VDC solenoid
Power Cord	
Model 24Z676, 24Z677	6 ft SJOOW, 3-wire, 18-gauge cable with flying leads
Model 24Z728	Power cord with integrated NEMA 5-15 plug
Current	25 to 60 mA
RF Frequency Band	2,400–2,483.5 MHz
Connection Ports Size (inlet, outlet, exhaust)	
Model 24Z676, 24Z728	3/8 in NPT
Model 24Z677	3/8 BSPP
Operating Temperature Range	14°F to 122°F (-10°C to 50°C)
Storage Temperature Range	-40°F to 185°F (-40°C to 85°C)
Weight	2.44 lbs (1.11 kg)
Dimensions – L x W x H	9.5 in x 2.25 x 3.75 in (241.3 mm x 57.2 mm x 95.3 mm)
Warranty	Two years electronics

PULSE® PRO FLUID MANAGEMENT

E PULSE EXTENDER

The Pulse wireless network can easily be expanded to accommodate large shops or a large number of devices. Simply plug the Extender into wall power to extend the network.

Expands Pulse Network

Supports 20 devices and extends the network range.

Simple Wireless Setup

Automatic network identification.

Integrated Electrical Plug

Simply plugs into wall.

Compact Design

Place conveniently in standard electrical outlet locations.



TECHNICAL SPECIFICATIONS

Operating Temperature	32°F to 140°F (0°C to 60°C)
Power Input	Universal AC input (100 - 240 VAC)
Length	2.31 in (5.87 cm)
Width	1.27 in (3.23 cm)
Height	3.28 in (8.33 cm)
Weight	0.5 lb (0.25 kg)
Warranty	Two years electronics

E ORDERING OPTIONS

Part Number	Description
20A058	Pulse Pro Extender

E PULSE REMOTE EXTENDER

The Pulse wireless network can easily be expanded to accommodate devices in secondary on-site buildings. Connect the Remote Extender to wall power and local network via Ethernet or Wi-Fi to extend the network.

Expands Pulse Network

Supports 20 devices and extends the network range.

Simple Wireless Setup

Automatic network identification.

Multiple Network Connection Options

Utilizes local network Ethernet or Wi-Fi to communicate back to Hub.

Compact Design

Easy to place even in tight spaces.



Electrical Power

Includes plug-in power adapter.

TECHNICAL SPECIFICATIONS

Connections	Ethernet or Wi-Fi
Ethernet	10/100Base-T
Wi-Fi	802.11 b/g/n
Operating Temperature	32°F to 104°F (0°C to 40°C)
Length	3 in (7.62 cm)
Width	3 in (7.62 cm)
Height	1 in (2.54 cm)
Warranty	Two years electronics

E ORDERING OPTIONS

Part Number	Description
17F878	Remote Extender with global power adapter



F ROLL AROUND PACKAGE

Pulse Pro Fluid Management wireless technology allows you to control your mobile drums and dispenses by providing security for expensive drums of synthetic and semi-synthetic fluids. Each package contains everything you need to manage your drums in existing Pulse installations. Drum not included.



ORDERING OPTIONS

Package Number	Extensions	Package Includes					
		Meter	Pump	Downtube	Drum Cart	Air Regulator	Hose
25D948	8 GPM, Rigid	25M317	24G576	16F878	24F915	24H420	24H865
25D952	8 GPM, Flexible	25M319					
25D953	8 GPM, Gear Lube	25M326					

G OIL BAR

Components ordered separately. For complete unit, order console (25D121), dispense kit (25D130) (one per meter) and Pulse meters (25N415) as needed.



ORDERING OPTIONS

OIL BAR

Part Number	Description
25D121	Oil Bar Console
25D130	Oil Bar Dispense Kit
25N415	Oil Bar Pulse Dispense Meter

H PULSE UNIVERSAL CONTROLLER

Manage any fluid dispense with Pulse Fluid Management – including diesel and DEF.




ORDERING OPTIONS

PULSE UNIVERSAL CONTROLLER


Part Number	Description
25V710	Pulse Pro Universal Controller

ACCESSORIES

	Part Number	Description
	249440	Console bracket

PULSE PRO DEMO KIT

Pulse Pro demo case with everything needed to show customers how Pulse Pro will save them time, gain them more billable hours and maximize profitability.

	Part Number	Description
	25D625	Includes Pulse Hub (24Z978), Pulse Dispense Meter, Pulse TLM (25M449), Pulse PAC (24Z728), Pulse Extender (20A058), Pulse Remote Extender (17F878), Pulse NFC Tag, case and protective foam

PULSE® ASSET FLUID MANAGEMENT

Pulse Asset Fluid Management is designed for applications where wireless signal may not always be available, Pulse Asset is a platform-based system that wirelessly tracks what machines are getting filled, how much fluid is used, who did the dispense and when the dispense occurred.



FLUID MANAGEMENT

WHY PULSE ASSET FLUID MANAGEMENT?

ROI

Pulse Asset allows recording of every drop of fluid dispensed on the factory floor – reducing fluid usage and keeping expenses down. With Pulse Asset, you'll optimize equipment uptime and stay ahead of the competition.

EFFICIENCY AND SAFETY

Make reactive maintenance a thing of the past. Automated recording of dispenses reduces the chance of errors and optimizes fluid delivery practices. Identify leaking assets and reduce the risk of fluid spills before they happen.

SIMPLICITY AND RELIABILITY

This simple system allows anybody to be trained to use – from the factory floor to the manufacturing line. The robust testing done ensures Pulse Asset exceeds quality standards, to provide many years of reliable service.

EASE OF OPERATION*



1 Fill assets utilizing meter that records up to 40 dispenses.



2 Sync the meter to the HUB once dispenses are complete.



3 Analyze dispense history on any PC, phone or tablet connected to LAN.

*Please refer to the owners manual for more information.



Local Area Network (LAN) Connection

Data is accessible through flexible and private log-in software on any PC, tablet or phone connected to the local area network.



Built-In Computer

Runs custom operating system.

Asset Tags

Installed at each machine prevent filling with incorrect fluids.



User Tags

Provide accountability and reduce human error.

Dispense Accountability

NFC tags control dispense activation.

Wireless Connection

Sync to HUB when wireless connection is available to access dispense records.

Bypass Manual Records

Meters record up to 40 dispenses offline.



FLUID MANAGEMENT

ORDERING OPTIONS

PULSE ASSET STARTER KIT

Part Number	Description
2006744	Includes one HUB, one NFC reader-writer and one 25 pack of NFC pendants

COMPONENTS

Part Number	Description
26D776	8 gpm Dispense Meter with 1/2 in NPT inlet – rigid extension, oil nozzle
26D777	8 gpm Dispense Meter with 1/2 in NPT inlet – rigid extension, coolant nozzle
26D784	18 gpm Dispense Meter with 3/4 in NPT inlet – rigid extension, high flow oil-coolant nozzle
131462	NFC pendants, blue with Graco logo – 25 pack
2006845	Adhesive NFC tags – 25 pack
18G102	Replacement NFC reader-writer – note that one is already included with Pulse Asset Starter Kit

PULSE ASSET UNIVERSAL CONTROLLER

Part Number	Description
25V711	Pulse Asset Universal Controller

OIL PUMP AND METER PACKAGES

Part Number	Description
2006857	16 gallon kit with 1:1 Fast-Ball 100 pump
2006858	55 gallon with 1:1 Fast-Ball 100 pump
2006859	Universal with 1:1 Fast-Ball 100 pump
2006860	16 gallon with 5:1 Fire-Ball 300 pump
2006861	55 gallon with 5:1 Fire-Ball 300 pump
2006862	Universal with 5:1 Fire-Ball 300 pump

Each kit includes a pump with bung adapter, an Asset meter with rigid extension, and a hose kit with 6 ft air hose and 6 ft oil hose. 16 and 55 gallon kits also include hand truck for oil barrel (barrel not included).

DEMO KITS

Part Number	Description
2006727	Pulse Asset Full Demo Kit. Includes Pulse HUB, demo meter with cutaway gear chamber, NFC reader-writer, 25-pack of NFC pendants and a Pulse Extender in a wheeled hard case with foam inserts.
2006728	Pulse Asset Demo Meter Kit. Includes demo meter with cutaway gear chamber, NFC reader-writer and a 25-pack of NFC pendants in a hard case with foam inserts.

PULSE® FC FLUID CONTROL

Pulse FC is wire-free, so installation and configurations are easier and cheaper. We've replaced the big box console with fast, reliable and convenient fluid cards scanned at easy-to-handle meters, so users can employ the same type of familiar technologies they use elsewhere.




FLUID MANAGEMENT

STEPS TO BUILD YOUR PULSE FC SYSTEM:



HOW IT WORKS

Pulse FC is a fluid control system that utilizes SD Preset meters. When put into Pulse FC mode, SD Preset meters will only dispense fluid when authorized with Fluid Cards. These included cards are programmed using the Pulse FC Software and Card Programmer. Once programmed, the cards are simply tapped to the meter which will be preset for the authorized amount of fluid and will not dispense any more than authorized.

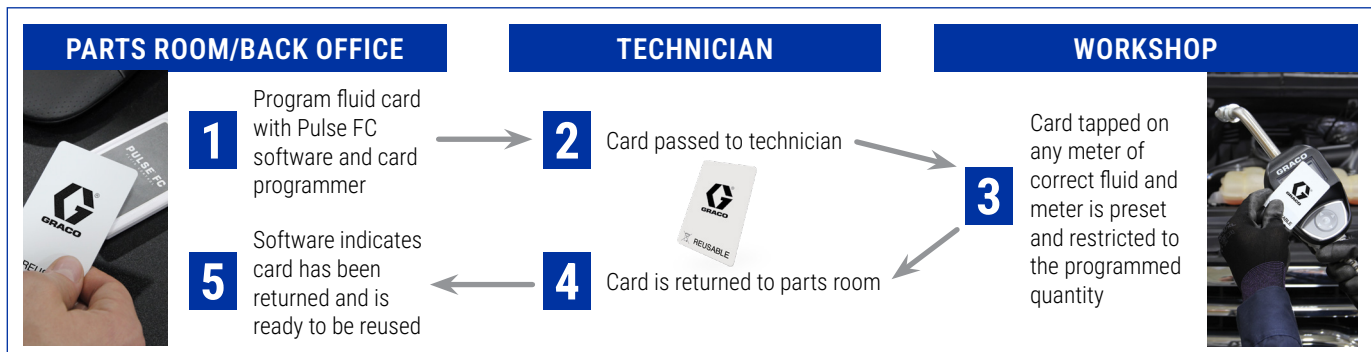



GAIN INSIGHT INTO AND CONTROL OF YOUR BULK FLUIDS




Simplicity. Avoid surprises, interruptions and delays. Fluids are easily controlled so technicians can spend more time serving more customers.



Accountability. Be assured every vehicle or machine receives the appropriate amount of fluid for more accurate billing.



Scalability. Add Pulse FC into almost any environment quickly, even retrofit applications and avoid excessive installation costs and delays. You can also easily upgrade to Graco's Pulse Pro.



Mobility. Pair with mobile dispense units and drums quickly so your team can conveniently dispense without delays, hassles or extra steps.

PULSE FC SOFTWARE

Pulse FC is a Windows PC-based software. Paired with the card programmer it allows setup and operation of the system. Cards can be utilized to authorize dispenses, totalize all fluids dispensed, as well as setup and calibrate SD™ Preset meters.

The screenshot displays the Pulse FC software interface. The main window shows a table of dispenses with columns for DATE/TIME, FLUID, QUANTITY, and STATUS. A dialog box titled 'Create Meter Dispense' is open, showing fields for Fluid (5W-30) and Quantity (2.0 Quarts). A message at the bottom of the dialog states 'Fluid Card successfully created'. Below the main window, a USB drive labeled 'PULSE FC FLUID CONTROL' is shown. At the bottom of the software window, there is a 'See actual Fluid Totals' section with a table:

FLUID	TOTAL AUTHORIZED	RESET
0W-30	0 Quarts	○
5W-30	2 Quarts	○
0W-40	0 Quarts	○

PULSE® FC FLUID CONTROL

A PULSE FC STARTER KIT

Enjoy an easy-to-use, easy-to-install, out-of-the-box fluid control system designed for fast wire-free setup and configuration. Pulse FC integrates into existing or new environments quickly and cost-effectively without interrupting daily operations.



Pulse FC Software Quick Start

Easy-to-follow instructions for quick system setup.

Pulse FC Programmer

Easily program cards for dispense or fluid totals.

Pulse FC Fluid Cards

Reusable fluid cards can be scanned directly on the SD preset meter's built-in NFC reader.

Pulse FC Software

Simple PC-based software is used in conjunction with Pulse FC Programmer.

A ORDERING OPTIONS

Part Number	Description
26C401	Pulse FC Starter Kit – Includes Software, Card Programmer, Software Quick Start and 50-Pack of Fluid Cards



B SD™ PRESET DISPENSE METERS

With Pulse FC, dispense only precise volumes to create efficiencies for your entire shop operation. Monitor how much fluid you're using. Choose the amount of fluid each technician can dispense in order to maintain accurate inventory.

Large LCD High-Contrast Display

High-contrast screen for reading in all lighting conditions with easy setup and navigation. See what fluid the meter is setup for and exactly how much you are dispensing.

Upgrade Option

Compatible with Pulse™ FC and upgradeable to Pulse™ Pro.

High Flow

Available in two models – 8 gpm (30 lpm) or 18 gpm (68 lpm).

Durable Cast Body

Designed for heavy duty and harsh applications.



Automatic Quick-Close Nozzle

Choose from rigid or flexible extensions with non-drip performance.

Long-Life Valve Design

Cartridge design for fewer and easier repairs.

Ergonomic Handle Design

Four-finger trigger and easy-to-use button pad reduce worker fatigue.

TYPICAL APPLICATIONS

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- In-plant
- Mining

TYPICAL FLUIDS

- Petroleum- and synthetic-based oils (motor gear, and ATF)
- Antifreeze

TECHNICAL SPECIFICATIONS

Flow Range*	0.25 gpm to 18 gpm (0.9 lpm to 68 lpm)
Maximum Working Pressure	1,500 psi (103.4 bar)
Units of Measure	Pints, quarts, gallons, liters (factory set to quarts)
Metered Dispense Valve Accuracy**	+/- 0.5%
Inlet	1/2 in-14 NPT or 3/4 in-14 NPT
Outlet	3/4 in-16 straight thread O-ring Boss
Maximum Recorded Dispense	9999 units (factory set in quarts)
Operating Temperature Range	4°F to 158°F (-20°C to 70°C)
Storage Temperature Range	-40°F to 158°F (-40°C to 70°C)
Wetted Parts	Aluminum, stainless steel, PBT, nitrile rubber, zinc plated carbon steel, nickel plated carbon steel
Dimensions (without extension)	13 in L x 3.75 in W x 5.75 in H (33 cm x 9.5 cm x 14.6 cm)
Weight	5.3 lb (2.4 kg)
Warranty	Five years overall, three years electronics
Instruction Manual	3A6711 and 3A6673

*Tested in 10W motor oil. Flow rates vary with fluid pressure, temperature and viscosity.

**At 2.5 gpm (9.5 lpm), at 70°F (21°C), with 10-weight oil and 1 gallon dispensed. May require calibration.

PULSE® FC FLUID CONTROL

B ORDERING OPTIONS

SD™ PRESET ELECTRONIC METERS



26C384

	Dispense Type	Flow Range gpm (lpm)	Fluid	Extension	Inlet in (NPT)	Part Number
SDP8	Preset (Pulse FC enabled)	0.25–8 (1–30)	Oil	Rigid	1/2	26C384
				Flexible	1/2	26C354
			Antifreeze	Rigid	1/2	26C385
				Flexible	1/2	26C355
			Gear lube	Rigid	1/2	26C358
SDP18	Preset (Pulse FC enabled)	0.25–18 (1–68)	Oil	Rigid	1/2	26C356
				Flexible	1/2	26C357
				Rigid	3/4	26C360
				Flexible	3/4	26C361

NOZZLE AND EXTENSION KITS


	Extension	Fluid	Nozzle Description	Part Number	Compatible Meters
	Rigid	Oil	Automatic, non-drip, quick-close	255852	SDP8
		Antifreeze	Non-drip, manual open/close	26C267	SDP8
		Oil/Antifreeze	High-flow, non-drip, quick-close	255857	SDP18
	Rigid	Gear lube	Non-drip, quick-close	255854	SDP8
	Flexible	Oil	Automatic, non-drip, quick-close	255853	SDP8
		Antifreeze	Non-drip, manual open/close	26C268	SDP8
		Oil/Antifreeze	High-flow, non-drip, quick-close	255858	SDP18
	Nozzle Only	Oil	Automatic, non-drip, quick-close	17R220	SDP8
	Nozzle Only	Gear lube	Non-drip, quick-close	255470	SDP8
	Nozzle Only	Oil/Antifreeze	Non-drip, manual open/close	17T207	SDP8
	Flexible	Oil/Antifreeze	Extension only, 2 ft length	131733	SDP8



C ORDERING OPTIONS

ROLL AROUND PACKAGE

Pulse FC wire-free technology allows you to control your mobile drums and dispenses by providing security for expensive drums of synthetic and semi-synthetic fluids. Each package contains everything you need to manage your drums in existing installations. Drum not included.

	Package Number	Extensions	Package Includes					
			Meter	Pump	Downtube	Drum Cart	Air Regulator	Hose
	26C366	8 GPM, Gear Lube	26C358	24G576	16F878	24F915	24H420	24H865
	26C367	8 GPM, Flexible	26C354					
	26C409	8 GPM, Rigid	26C384					

OIL BAR

Part Number	Description
25D121	Oil Bar Console
25D130	Oil Bar Dispense Kit
25N771	Oil Bar SD Preset Dispense Meter




OIL BAR


Components ordered separately. For complete unit, order console (25D121), dispense kit (25D130) (one per meter) and Pulse FC meters (25N771) as needed.

ACCESSORIES

PULSE FC FLUID CARDS

	Part Number	Description
		130783


PULSE FC DEMO KIT

	Part Number	Description
		26C399

SD METER FILTER KITS

Part Number	Description
25D906	Filter kit includes filters/strainers (15M308) and O-rings (155332)

SWIVEL COVERS / IMPACT PROTECTION

	Part Number	Description
		15T366
	15T367	Red swivel cover
	15T368	Blue swivel cover
	15T369	Green swivel cover
	15T370	Yellow swivel cover
	131226	Pulse / SD meter boot

PULSE® LEVEL FLUID MANAGEMENT

Graco Pulse Level offers highly intuitive tank-level-visibility options to help you optimize deliveries, margins and customer service. Choose from multiple tank-level-monitoring technologies, including a system that can run entirely on Wi-Fi. Track tank levels, capture and apply data, and assign distribution routes quickly, accurately and confidently from the industry's leading fluid management expert.



CHOOSE YOUR PULSE LEVEL SYSTEM:



25T460

ULTRASONIC WI-FI

There are other TLM solutions on the market – but none of them are designed for Wi-Fi configuration. When connected to a reliable network, marketers and their customers can avoid service fees or contracts entirely.



25T461

ULTRASONIC CELLULAR

No need to worry about obsolete cellular network, we use a long term data solution. Versatile multi-thread adapter allows for installation on all different tank types.



25T462

PRESSURE CELLULAR

No need to worry about obsolete cellular network, we use a long term data solution. Our pressure unit is approved for hazardous locations and measures tanks up to 30 feet tall.

TYPICAL APPLICATIONS

- Heavy-duty truck dealers
- Fleet maintenance
- Mining maintenance
- Public works garage
- Construction vehicle maintenance
- Heavy-duty mobile service trucks
- Mining
- Remote job sites

TYPICAL FLUIDS

- Petroleum- and synthetic-based oils (motor, gear and ATF)
- Fuel (diesel/gasoline/kerosene)
- Water/waste water
- Antifreeze
- Windshield washer fluid
- Waste oil
- DEF

Part Number	25T460	25T461	25T462
No Monthly Fees	•		
No Maintenance Contract	•	•	•
Easy-to-Use Software for Monitoring Data	•	•	•
Easily Replaceable Batteries	•	•	•
NPT Thread for Easy Installation	•	•	•
Viewable Data with Other Models of Pulse Level	•	•	•
LTE Cellular Coverage		•	•
Works in Remote Locations		•	•
30 ft Tanks			•
Hazardous Environment Approved			•



ULTRASONIC WI-FI



No Ongoing Fees

Wi-Fi connection.

Long Battery Life

7-year battery life with replaceable C batteries.

On-Demand Reading

Ability to take reading at any time.

Ultrasonic Sensor

Measure tanks 10 ft tall.

ULTRASONIC CELLULAR



Cellular Communication

No need for local network connection.

On-Demand Reading

Ability to take reading at any time.

Long Battery Life

5-year battery life with replaceable C batteries.

Ultrasonic Sensor

Measure tanks 13 ft tall.

PRESSURE CELLULAR



Cellular Communication

No need for local network connection.

Long Battery Life

Up to 10-year battery life.

Hazardous-Location Rating

Approved for use with flammable fluids such as gasoline.

Submersible Pressure Sensor

Measure tanks up to 30 ft tall.

PULSE® LEVEL FLUID MANAGEMENT

TECHNICAL SPECIFICATIONS


	Ultrasonic Wi-Fi TLM	Ultrasonic Cellular TLM	Pressure Cellular TLM
Compatible Fluids	Oil, kerosene, diesel, lubricants, additives, DEF/AdBlue, coolants, water, waste oil, waste water	Oil, kerosene, diesel, lubricants, additives, DEF/AdBlue, coolants, water, waste oil, waste water	Oil, kerosene, diesel, lubricants, additives, DEF/AdBlue, coolants, water, waste oil, waste water, gasoline
Tank Depth Measurement Range	5.0 in to 9 ft-7 in	5.0 in to 13 ft	30 ft
Fluid Level Measurement Accuracy	+/- 1.0 in	+/- 1.0 in	+/- 1.0 in
Mounting	1.25 in, 1.5 in and 2.0 in threaded NPT connector	1.25 in, 1.5 in and 2.0 in threaded NPT connector	1 in threaded NPT connector with wall-mounted logger
Clearance Height Above Tank for TLM	7.5 in	7.5 in	N/A
Weight	0.5 lb	1.17 lb with batteries	0.75 lb
RF Frequency Band	2.412 GHz - 2.462 GHz	LTE CAT-M1	LTE CAT-M1
Maximum RF Transmit Power	18 dBm	23 dBm	23 dBm
Operating Temperature Range	0°F to 122°F	0°F to 122°F	-4°F to 131°F
Batteries	Li-SOC12 Size R14, 3.6V C-cell	4 x Alkaline C-cell	Graco Part Number 19D216
Battery Life	7.5 years* from activation	5 years*	10 years* from activation
Enclosure (Ingress Protection)	IP67	IP67	IP68
Tanks			
Maximum Volume	999,999 gallons	999,999 gallons	999,999 gallons
Maximum Height	9 ft-7 in	13 ft	30 ft
Altitude	<6,000 ft	<6,000 ft	<6,000 ft

*The battery life is based upon four (4) measurements per day and one (1) data drop per day from a location with adequate coverage, and a normal distribution over the operating temperature range centered at +25°C (77°F).

PULSE LEVEL SOFTWARE

Pulse Level software has a simple intuitive design and gives you powerful information at your fingertips. Get a quick consolidated view of key sites via a specifically designed web page. Track tank levels at a glance, generate customizable reports and automated email alerts, and share critical information with other key decision makers.

- Intuitive alerts ensure your customers never run out of products
- See the status of each customer site on an easy-to-view map
- Advanced reporting – create and schedule automated reports to track history and see usage trends
- Expand the capabilities of your existing software systems with tank data from Pulse Level's API
- Simple annual and monthly billing options, or avoid charges altogether with Wi-Fi
- Allow customer to find insights on their own tanks by sharing Pulse Level data
- Use customers' existing Pulse Pro hardware to avoid the cost of additional monitors

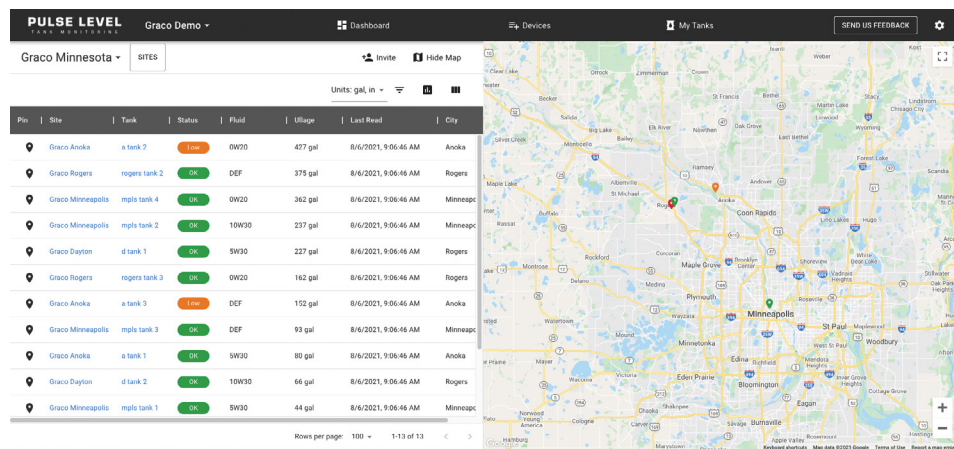



FLUID DEFENDER®

DON'T TAKE RISKS WITH YOUR BULK FLUIDS

Designed for control of bulk fluid tanks, preventing overfill and pump runaway.

Monitor and Control up to 5 Tanks

Manage an entire tank room with one system.

Fresh Oil and Waste Oil Monitoring

Provides emergency shut off, over-fill and run away protection.

Remote Filling

Allows for up to 1,000 feet between control box and tanks.

Alarm Notifications

Siren, rotating beacon and remote lights.

Pulse Integration

Integrate with Pulse® software for increased insights, analysis and control.

TYPICAL APPLICATIONS

- Service shops
- Automotive dealerships
- Fast lube centers
- Agriculture dealers

ORDERING OPTIONS

Part Number	Description
25V470	Fluid Defender
25V471	Pulse Fluid Defender
25V475	High Level Float
25V476	Low Level 10 ft Float
25V477	Low Level 30 ft Float
25V478	Dual Level 10 ft Float
25V479	Dual Level 30 ft Float
25V482	Air Control Solenoid
18G108	Single Light Bracket Kit
18G109	Multi-Light Bracket Kit



25V478



18G109



FLUID DEFENDER

Control and monitor up to 5 tanks and utilize air solenoids to increase control and defend from overfill or pump run away.



PULSE FLUID DEFENDER

Receive valuable tank data into the Pulse Pro software to further improve tracking and management of bulk fluids. Set email alerts to increase visibility to alarms during off-business hours.

TECHNICAL SPECIFICATIONS

CONTROLLERS	
Dimensions (W x H x D)	11.88 in x 10.29 in x 6.43 in (30.18 cm x 26.14 cm x 16.33 cm)
Weight	5 lbs (2.27 kg)
Operating Temperature	14°F to 122°F (-10°C to 50°C)
Enclosure Rating	NEMA Type 3R
Power Requirement	120 VAC
Audible Alarm	Yes
Audible Alarm Pressure Level	103 dB(A)
Visual Alarm Indicators	Rotating beacon, red light, remote light (optional), email notification (Pulse)
Channels	5
FLOATS	
Single Tank Versions	10 ft and 30 ft (3.05 m and 9.14 m)
Dual Tank Versions	10 ft and 30 ft (3.05 m and 9.14 m)
Intended Use	Motor Oil, Waste Oil, ATF, Antifreeze, Diesel, WWS
Minimum Specific Gravity	0.75
Amp Rating	0.1 amp
Maximum Fluid Viscosity	2,000 centipoise
Temperature Range	14°F to 122°F (-10°C to 50°C)
Minimum Detectable Tank Level	2 in (5.1 cm)
Minimum Head Space	5.5 in (2.54 cm)

TRADITIONAL BOX – WIRED FLUID CONTROL COMPONENTS

ORDERING OPTIONS

IN-LINE METERS

Part Number	Description
236763	Electronic pulse output meter (quarts)
236764	Electronic pulse output meter (liters)
215474	Mechanical pulse output meter (quarts)
244342	Meter pulse converter, used when upgrading old-style modular fluid commander to electronic allows use of 215474/215475 with the EFC.

AIR SOLENOID VALVES

Part Number	Description
215407	Air solenoid valve, 150 psi (10 bar) (1/2 npsm (f) conduit ports for wiring; 1/4 in NPT(F) air ports, adapted to 3/8 (f) IN, 3/8 (m) OUT) operates on 24V DC and 110 VAC. Automatically shuts-off air inlet to pump when pre-set dispensed amount is reached. Materials of construction: brass, SST, Buna.
105474	Air solenoid valve (bare) 150 psi (10 bar), same as 215407 but without wire connectors or adapters. 1/2 in npsm (f) conduit ports for wiring; 1/4 in NPT(F) air ports. 150 psi (10.3 bar) max. working pressure.

FLUID SOLENOID VALVES

Part Number	Description
215487	Fluid solenoid valve, 1/2 in NPT(F) 3,000 psi (207 bar) operates on 24V DC. Automatically shuts-off fluid when pre-set dispensed amount is reached. Includes tube, valve, pin connector, wire plug connector and adapter.
514150	Fluid solenoid valve for antifreeze, 150 psi max. (10 bar), 1/2 in NPT(F), same features as 215487.
110025	Bare fluid solenoid valve, 1/2 in NPT(F) 3,000 psi, same features as 215487 above, but without wiring connectors or adapters.

READY-LIGHT KITS

Part Number	Description
218588	Ready-light kit, signals operator when dispensing can begin. Includes "ready to dispense" indicator light (239019), strainer (240417), fluid solenoid valve (215487) and hardware.
238996	Ready-light with junction box (no solenoid or strainer)
239019	Ready-to-dispense indicator light only
113859	Lamp for indicator only

INSTALLATION COMPONENTS

Part Number	Description
111620	Check valve
223179	Fluid filter kit (for bare electronic meter)
186472	Wall-mounting bracket
108458	Fluid shut-off valve
237893	Thermal relief kit for 900 psi (62 bar), relieves excess heat-induced pressure from dispense system. Male and female ends allow for simple installation.

CONNECTING CABLES FOR CONNECTING SOLENOIDS AND CONSOLES, 90-VOLT, 2-WIRE, 18-GAUGE

Part Number	Description
215481	100 ft (30.5 m) pre-connected at both ends



OIL PUMPS







	Page
Oil Pump Selection Guide	34-35
Fast-Ball® 100 Oil Pumps	36-37
LD Series™ Oil Pumps	38-53
LD Series™ Oil Pump Accessories	54-55
Mini Fire-Ball® 225 Oil Pumps	56-59
Fire-Ball® 300 Oil Pumps	60-64
Fire-Ball® 425 Oil Pumps	65-68
Oil Pump Accessories	69-74
NXT™ High-Flo® Oil Pumps	75-77
NXT Dura-Flo® Oil Pumps	78-81
Dyna-Star® Hydraulic Oil Pumps	82-83
Power-Star™ Hydraulic Oil Pumps	84-85
Manually Operated Oil Pumps	86-87




OIL PUMP SELECTION GUIDE

OIL PUMPS AND PACKAGES

Pump Family and Fluid Pressure Ratio	Typical Applications	Annual Usage	Line Length	Simultaneous Dispense Points	Approximate Free Flow Rate @ 100 psi	Air Inlet	Fluid Inlet	Fluid Outlet	Air Operation Range	Reference Page
Fast-Ball 100 	<ul style="list-style-type: none"> Fluid transfer Specialty fluid dispenses Point of use Mobile fluid carts 	5,000 gal (19,00 l)	< 100 ft (30 m)	1 (no reels)	5 gpm (18.9 lpm)	1/4 NPT(F)	1 NPT(F)	3/4 NPT(F)	40-150 psi (2.8-10.3 bar)	36
LD, 3:1 	<ul style="list-style-type: none"> Automotive dealerships Fast lube centers Lube trucks Lubricant transfer Service shops 	20,000 gal (75,000 l)	300 ft (91 m)	1 to 2	7.8 gpm (29.5 lpm)	1/4 NPT(F)	1 NPT(F)	1/2 NPT(F)	20-150 psi (1.37-10.3 bar)	38
LD, 5:1 	<ul style="list-style-type: none"> Automotive dealerships Fast lube centers Lube trucks Lubricant transfer Service shops 	20,000 gal (75,000 l)	300 ft (91 m)	1 to 2	5 gpm (18.9 lpm)	1/4 NPT(F)	1 NPT(F)	1/2 NPT(F)	20-150 psi (1.37-10.3 bar)	38
Mini Fire-Ball 225, 3:1 	<ul style="list-style-type: none"> Automotive dealerships Fast lube centers Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Lubricant transfer Mining Service shops 	30,000 gal (113,500 l)	250 ft (76 m)	1 to 2	1.8 gpm (6.8 lpm)	3/8 NPT(F)	1-1/2 NPT(F)	1/2 NPT(F)	40-180 psi (2.8-12 bar)	56
Fire-Ball 300, 5:1 	<ul style="list-style-type: none"> Automotive dealerships Fast lube centers Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Lubricant transfer Mining Service shops 	35,000 gal (132,000 l)	500 ft (152 m)	1 to 3	3 gpm (11.4 lpm)	3/8 NPT(F)	1-1/2 NPT(F)	1/2 NPT(F)	40-180 psi (2.8-12 bar)	60
Fire-Ball 425, 3:1 	<ul style="list-style-type: none"> Automotive dealerships Fast lube centers Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Lubricant transfer Mining Service shops 	> 35,000 gal (132,000 l)	Up to 250 ft (76 m)	3 to 4	10 gpm (37.9 lpm)	1/2 NPT(F)	1-1/2 NPT(F)	3/4 NPT(F)	40-180 psi (2.8-12 bar)	65
Fire-Ball 425, 6:1 	<ul style="list-style-type: none"> Automotive dealerships Fast lube centers Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Lubricant transfer Mining Service shops 	> 35,000 gal (132,000 l)	Up to 500 ft (152 m)	3 to 4	6 gpm (22.7 lpm)	1/2 NPT(F)	1-1/2 NPT(F)	3/4 NPT(F)	40-180 psi (2.8-12 bar)	65
Fire-Ball 425, 10:1 	<ul style="list-style-type: none"> Automotive dealerships Fast lube centers Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Lubricant transfer Mining Service shops 	> 35,000 gal (132,000 l)	Up to 750 ft (228.6 m)	3 to 4	4 gpm (@ 60 cpm) (lpm)	1/2 NPT(F)	1-1/2 NPT(F)	3/4 NPT(F)	40-180 psi (2.8-12 bar)	65



Pump Family and Fluid Pressure Ratio	Typical Applications	Annual Usage	Line Length	Simultaneous Dispense Points	Air Inlet	Fluid Inlet	Fluid Outlet	Air Operation Range	Reference Page
NXT High Flo, 3.5:1 	<ul style="list-style-type: none"> Fleet service facilities In-plant large runs Large volume lubricant transfer Mining remote fill 	> 35,000 gal (132,000 l)	Up to 250 ft (76 m)	4 to 5	3/4 NPT(F)	1-1/2 NPT(F)	1 NPT(F)	20-100 psi (1.4-7 bar)	75
NXT High Flo, 4.5:1 	<ul style="list-style-type: none"> Fleet service facilities In-plant large runs Large volume lubricant transfer Mining remote fill 	> 35,000 gal (132,000 l)	Up to 450 ft (137 m)	4 to 5	3/4 NPT(F)	1-1/2 NPT(F)	1 NPT(F)	20-100 psi (1.4-7 bar)	75
NXT Dura-Flo, 6:1 	<ul style="list-style-type: none"> Fleet service facilities In-plant large runs Large volume lubricant transfer Mining remote fill 	> 35,000 gal (132,000 l)	Up to 500 ft (152 m)	2 to 4	3/4 NPT(F)	2 NPT(F)	1-1/2 NPT(F)	20-100 psi (1.4-7 bar)	78
NXT Dura-Flo, 10:1 	<ul style="list-style-type: none"> Fleet service facilities In-plant large runs Large volume lubricant transfer Mining remote fill 	> 35,000 gal (132,000 l)	Up to 750 ft (228.6 m)	2 to 4	3/4 NPT(F)	2 NPT(F)	1-1/2 NPT(F)	20-100 psi (1.4-7 bar)	78
NXT Dura-Flo, 12:1 	<ul style="list-style-type: none"> Fleet service facilities In-plant large runs Large volume lubricant transfer Mining remote fill 	> 35,000 gal (132,000 l)	Up to 1000 ft (305 m)	2 to 4	3/4 NPT(F)	2 NPT(F)	1-1/2 NPT(M)	20-100 psi (1.4-7 bar)	78
NXT Dura-Flo, 23:1 	<ul style="list-style-type: none"> Fleet service facilities In-plant large runs Large volume lubricant transfer Mining remote fill 	> 35,000 gal (132,000 l)	Up to 1000 ft (305 m)	2 to 4	3/4 NPT(F)	2 NPT(F)	1-1/2 NPT(M)	20-75 psi (1.4-5.2 bar)	78

Pump Family and Fluid Pressure Ratio	Typical Applications	Maximum Output Flow Rate	Maximum Fluid Output Pressure	Hydraulic Inlet	Hydraulic Outlet	Fluid Inlet	Fluid Outlet	Maximum Hydraulic Inlet Pressure	Reference Page
Dyna-Star 1:1 	<ul style="list-style-type: none"> Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Lubricant transfer Mining Service shops 	3 gpm (11 lpm)	1500 psi (102 bar)	3/8 NPT(F)	3/4 NPT(F)	1-1/2 NPT(F)	1/2 NPT(F)	1500 psi (102 bar)	82
Dyna-Star 1/4:1 	<ul style="list-style-type: none"> Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Lubricant transfer Mining Service shops 	10 gpm (38 lpm)	375 psi (25.1 bar)	3/8 NPT(F)	3/4 NPT(F)	1-1/2 NPT(F)	1/2 NPT(F)	1500 psi (102 bar)	82
Power-Star 1:1 	<ul style="list-style-type: none"> Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Lubricant transfer Mining Service shops 	12 gpm (45 lpm)	1500 psi (102 bar)	3/4 NPT(F)	1-1/4 NPT(F)	1-1/2 NPT(F)	1/2 NPT(F)	1500 psi (102 bar)	84

FAST-BALL[®] 100 OIL PUMPS

DESIGNED FOR ENHANCED QUALITY, DURABILITY AND RELIABILITY

When you purchase Graco, you expect the best. The fully redesigned Fast-Ball delivers unmatched Graco performance and operation. Its simple, easy-to-install design allows for efficient serviceability to minimize downtime and keep your operations running.



In-Line Design

Means fewer parts for less pump wear.

Double-Acting Pump

Provides reliable fluid flow.

Differential Air Motor

Ensures smooth pump operation.

5-Year Warranty

Graco's quality guarantee and peace of mind.


TYPICAL APPLICATIONS

- Fluid transfer
- Specialty fluid dispenses
- Point of use
- Mobile fluid carts

TYPICAL FLUIDS

- Petroleum- and synthetic-based oils (motor, gear and ATF)

PUMP PERFORMANCE

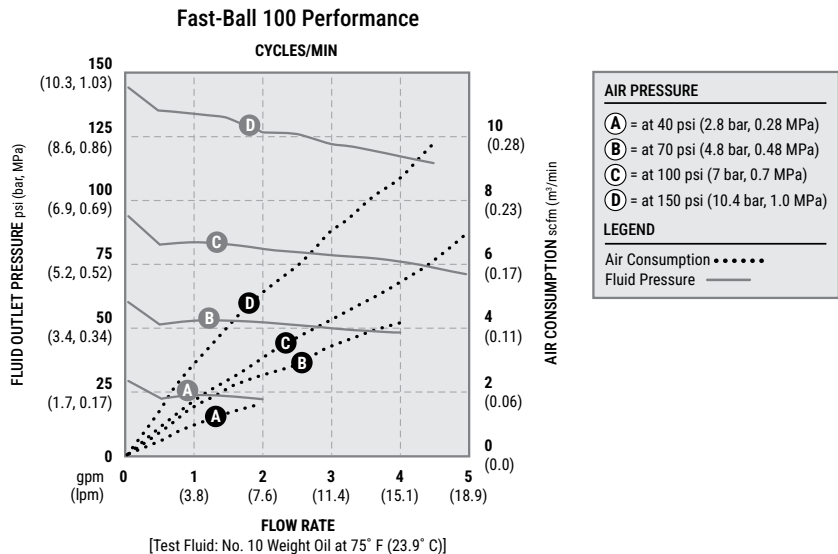



TECHNICAL SPECIFICATIONS

Air Inlet Size	1/4 in NPT
Air Operating Range	40-150 psi (2.8-10.3 bar)
Compatible Material	Oil, Gear Lube, ATF
Maximum Fluid Flow	12.5 gpm (47.3 lpm)
Fluid Inlet Size	1 in NPT
Fluid Outlet Size	3/4 in NPT
Maximum Air Inlet Pressure	150 psi (10.3 bar)
Maximum Continuous Cycle Rate	100 cpm
Maximum Working Pressure	150 psi (10.3 bar)
Power Type	Pneumatic
Pump Ratio	1:1
Sound Power Level	78 dB(A)
Weight	6.3-9.8 lbs (2.9-4.4 kg)

ORDERING OPTIONS

PUMPS

Part Number	Description
279035	Universal Length Pump
279036	Cut-to-Length PVC Downtube Pump
279037	55 Gallon Drum Length Pump

PUMP PACKAGES



Package Number	2000726	2000727
Type of Package	Spigot Kit	Mobile Dolly Kit
Container Size	55 gal (200 l)	55 gal (200 l)
Ratio	1:1	1:1
Pump	279037	279037
Dispense Kit	218115	247712
Air Regulator Kit	218316	24H420
Air Hose Size	1/4 in x 6 ft	3/8 in x 6 ft
Fluid Hose Size	-	1/2 in x 15 ft
Dolly Base	-	129645
Instruction Manual	3A9348	3A9348

LD SERIES OIL PUMPS

DURABLE AND HARDWORKING

Stay ahead of the competition with LD Series pumps. These affordable and full-featured pumps are designed for lower-volume applications. LD pumps are fine-tuned for a compact, flexible and durable solution.



Modular Air Valve

Air inlet and exhaust locations are easy to configure with just four bolts for simple, hassle-free installations.

Pilot Valves

Patented self-cleaning design increases reliability in dirty air environments and minimizes pressure drop with rapid changeovers for reduced stalling and smoother flow.

Engineered for Durability

Patented cup and plate design eliminates the need for O-rings that wear out faster, for a more durable, longer-lasting solution.

Three Inch Air Motor

Provides more power to create better flow.

Built-In Thermal Relief and Inlet Strainer

Built-in thermal relief protects your equipment from thermal expansion, and an inlet strainer is built in to protect pump from contaminants.

OIL PUMPS AND PACKAGES

TYPICAL APPLICATIONS


- Automotive dealerships
- Fast lube centers
- Service shops

TYPICAL FLUIDS


- Petroleum- and synthetic-based oils (motor, gear and ATF)

PUMP PERFORMANCE

LD SERIES 3:1 PUMPS

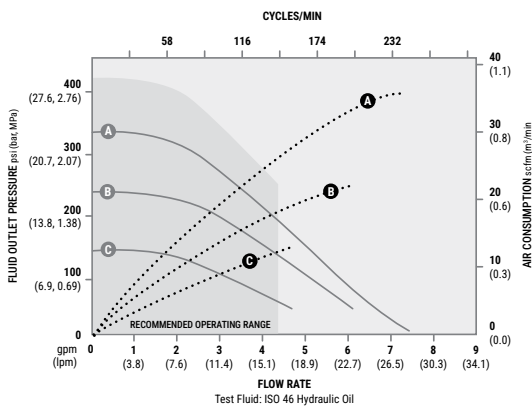

LD SERIES 5:1 PUMPS

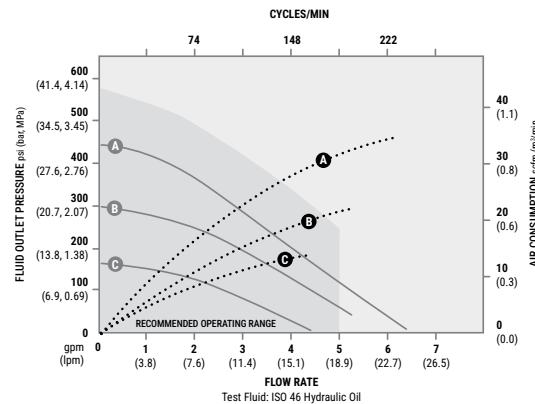

AIR PRESSURE	
(A)	= at 100 psi (6.9 bar, 0.69 MPa)
(B)	= at 70 psi (4.8 bar, 0.48 MPa)
(C)	= at 40 psi (2.8 bar, 0.28 MPa)
LEGEND	
.....	Air Consumption
————	Fluid Pressure



TECHNICAL SPECIFICATIONS

	LD Series 3:1	LD Series 5:1
Fluid Pressure Ratio	3:1	5:1
Air Motor Effective Diameter	3 in (76.2 mm)	3 in (76.2 mm)
Maximum Fluid Working Pressure	450 psi (31 bar / 3.1 MPa)	750 psi (51.7 bar / 5.17 MPa)
Approximate Free Flow Rate @ 100 psi	7.8 gal/min (30 liters/min)	6.7 gal/min (25 liters/min)
Output per Cycle	131 cc	102 cc
Approximate Air Use and Flow @ 100 psi (80 cpm)	18 scfm @ 2.8 gpm (0.51 m ³ /min @ 10.6 lpm)	18 scfm @ 2.1 gpm (0.51 m ³ /min @ 8.0 lpm)
Air Inlet	1/4 in	1/4 in
Fluid Inlet	1 in	1 in
Fluid Outlet	1/2 in	1/2 in
Air Operation Range	20 psi to 150 psi (1.37 bar to 10.3 bar)	20 psi to 150 psi (1.37 bar to 10.3 bar)
Maximum Recommended Pump Speed	120 cpm	180 cpm
Cycles per Gallon (liter)	29 (7.7)	37 (9.8)
Wetted Parts	Zinc plated carbon, steel, aluminum, nitrile, polyurethane, nickel plated aluminum	Zinc plated carbon, steel, aluminum, nitrile, polyurethane, nickel plated aluminum
Sound Pressure Level	72.9 dB(A)	72.9 dB(A)
Sound Power Level	82 dB(A)	82 dB(A)
Approximate Weight	7 lb (3.2 kg)	7.7 lb (3.5 kg)
Instruction Manual	3A1334	3A1334

ORDERING OPTIONS

LD SERIES 3:1 PUMPS

Part Number	Description
24G576	3:1 Universal oil pump with bung adapter (24F918)
24G579	3:1 Oil pump with cut-to-length PVC downtube (16F878) and bung adapter (24F918)
24G582	3:1 Oil pump with 55 gal (200 liter) downtube (16F886) and bung adapter (24F918)
24G585	3:1 Oil pump with 275 gal (1,040 liter) steel downtube (16F885) and bung adapter (24F918)

LD SERIES 5:1 PUMPS

Part Number	Description
24G588	5:1 Universal oil pump with bung adapter (24F918)
24G591	5:1 Oil pump with cut-to-length PVC downtube (16F878) and bung adapter (24F918)
24G594	5:1 Oil pump with 55 gal (200 liter) steel downtube (16F886) and bung adapter (24F918)
24G597	5:1 Oil pump with 275 gal (1,040 liter) steel downtube (16F885) and bung adapter (24F918)

LD SERIES 3:1 OIL PUMP PACKAGES

ORDERING OPTIONS

MOBILE OIL PACKAGES – CART

Self-relieving air regulator must be used for LD pump thermal relief function. Order regulator 24H420 or filter-regulator 133215 separately.



Package Number	24H751	24H750	24H753	24H752	24H775	24H774	24H777	24H776
Ratio	3:1	3:1	3:1	3:1	3:1	3:1	3:1	3:1
Pump Part Number	24G576	24G576	24G576	24G576	24G576	24G576	24G576	24G576
Suction Tube Size	200 L	200 L	200 L	200 L	200 L	200 L	200 L	200 L
Pump Downtube	16F886	16F886	16F886	16F886	16F886	16F886	16F886	16F886
Meter Type	Manual	Manual	Preset	Preset	Manual	Manual	Preset	Preset
Meter Part Number	25C903	25C904	256216	255277	25C903	25C904	256216	255277
Meter Extension	Rigid	Flexible	Rigid	Flexible	Rigid	Flexible	Rigid	Flexible
Hose Kit	24J495	24J495	24J495	24J495	24H865	24H865	24H865	24H865
Hose Reel Type	LDX	LDX	LDX	LDX	-	-	-	-
Hose Size	1/2 in x 50 ft	1/2 in x 50 ft	1/2 in x 50 ft	1/2 in x 50 ft	-	-	-	-
Hose Reel	HEM004	HEM004	HEM004	HEM004	-	-	-	-
55 gal Cart	24F915	24F915	24F915	24F915	24F915	24F915	24F915	24F915
Instruction Manual	3A1335	3A1335	3A1335	3A1335	3A1335	3A1335	3A1335	3A1335



Package 24H775 installed on a 55 gallon drum (not included in package).



ORDERING OPTIONS

MOBILE OIL PACKAGES – DOLLY

Self-relieving air regulator must be used for LD pump thermal relief function. Order regulator 24H420 or filter-regulator 133215 separately.



Package Number	25C551	25C553	25C550	25C552
Ratio	3:1	3:1	3:1	3:1
Pump Part Number	24G576	24G576	24G576	24G576
Container Size	16 gal (120 lb)	16 gal (120 lb)	55 gal (400 lb)	55 gal (400 lb)
Pump Downtube	16F878	16F878	16F886	16F886
Meter Type	Manual	Preset	Manual	Preset
Meter Part Number	25C903	256216	25C903	256216
Meter Extension	Rigid	Rigid	Rigid	Rigid
Hose Kit	24H865	24H865	24H865	24H865
Portable Base	131184	131184	129645	129645
Instruction Manual	3A1335	3A1335	3A1335	3A1335

LD SERIES 3:1 OIL PUMP PACKAGES

ORDERING OPTIONS

WALL MOUNT OIL PACKAGES

Self-relieving air regulator must be used for LD pump thermal relief function. Order regulator 24H420 or filter-regulator 133215 separately.



Package Number	24H689	24H695
Ratio	3:1	3:1
Pump Part Number	24G576	24G576
Suction Tube Size	55 gal drum	275 gal tote
Suction Hose Kit	24F935	24H666
Hose Kit	-	24H859
Wall Mount Bracket	24F910	24F910
Instruction Manual	3A1335	3A1335



Package 24H695 installed on a 275 gallon tote (not included in package).

Stationary Oil Packages

Self-relieving air regulator must be used for LD pump thermal relief function. Order regulator 24H420 or filter-regulator 133215 separately.



Package Number	24H800	24H799	24H802	24H801
Ratio	3:1	3:1	3:1	3:1
Pump Part Number	24G576	24G576	24G576	24G576
Suction Tube Size	Universal	Universal	Universal	Universal
Pump Downtube	16F878	16F878	16F878	16F878
Meter Type	Manual	Manual	Preset	Preset
Meter Part Number	25C903	25C904	256216	255277
Meter Extension	Rigid	Flexible	Rigid	Flexible
Hose Kit	24H859	24H859	24H859	24H859
Instruction Manual	3A1335	3A1335	3A1335	3A1335



ORDERING OPTIONS

STATIONARY OIL PACKAGES – TOTE

Standard packages include LD Series hose reel. Self-relieving air regulator must be used for LD pump thermal relief function. Order regulator 24H420 or filter-regulator 133215 separately.



Package Number	24H702	24H704	24H726	24H728
Ratio	3:1	3:1	3:1	3:1
Pump Part Number	24G576	24G576	24G576	24G576
Suction Tube Size	275 gal (1,040 l)	275 gal (1,040 l)	275 gal (1,040 l)	275 gal (1,040 l)
Pump Downtube	16F885	16F885	24H669	24H669
Mounting Position	Top	Top	Drain	Drain
Reel Type	LDX	LDX	LDX	LDX
Hose Reel Part Number	HEM004	HEM004	HEM004	HEM004
Hose Size	1/2 in x 35 ft	1/2 in x 35 ft	1/2 in x 35 ft	1/2 in x 35 ft
Reel Bracket Kit	24K285	24K285	24K285	24K285
Meter Type	Manual	Preset	Manual	Preset
Meter Part Number	25C903	256216	25C903	256216
Meter Extension	Rigid	Rigid	Rigid	Rigid
Hose Kit	6 ft x 3/8 in air hose / 6 ft x 1/2 in fluid hose	6 ft x 3/8 in air hose / 6 ft x 1/2 in fluid hose	6 ft x 3/8 in air hose / 6 ft x 1/2 in fluid hose	6 ft x 3/8 in air hose / 6 ft x 1/2 in fluid hose
Hose Kit Part Number	24J495	24J495	24J495	24J495
Top Mount Tote Bracket	24F930	24F930	24F931	24F931
Tote Mount Pump Bracket	-	-	24F920	24F920
Meter Tray	24F914	24F914	24F914	24F914
Instruction Manual	3A1335	3A1335	3A1335	3A1335

LD SERIES 3:1 OIL PUMP PACKAGES

ORDERING OPTIONS

DELUXE STATIONARY OIL PACKAGES – TOTE

Deluxe packages include SDX Series hose reel. Self-relieving air regulator must be used for LD pump thermal relief function. Order regulator 24H420 or filter-regulator 133215 separately.



Package Number	24K838	24K842
Ratio	3:1	3:1
Pump Part Number	24G576	24G576
Suction Tube Length	275 gal (1,040 l)	275 gal (1,040 l)
Pump Downtube	16F885	16F885
Reel Type	SDX	SDX
Hose Reel Part Number	SDM6HB	SDM6HB
Meter Type	Preset	Manual
Meter Part Number	256216	25C904
Meter Extension	Rigid	Flexible
Hoses and Fittings	24J495	24J495
Top Mount Tote Bracket	24F930	24F930
SDX Reel/IBC Tote Bracket	24K285	24K285
Meter Tray	24F914	24F914
Instruction Manual	3A1335	3A1335



ORDERING OPTIONS

TANK MOUNT OIL PACKAGES

Self-relieving air regulator must be used for LD pump thermal relief function. Order regulator 24H420 or filter-regulator 133215 separately.



Package Number	24J776	24J733	24J734	24K836
Ratio	3:1	3:1	3:1	3:1
Pump Part Number	24G576	24G576	24G576	24G576
Hose Reel Type	LDX	SDX	SDX	SDX
Hose Reel	HEM004	SDM65B	SDM65B	SDM65B
Meter Type	Manual	Manual	Preset	Manual
Meter Part Number	25C903	25C903	256216	25C904
Meter Extension	Rigid	Rigid	Rigid	Flexible
Inlet Kit	25U371	218549	218549	218549
Instruction Manual	3A1335	3A1335	3A1335	3A1335

LD SERIES 3:1 OIL PUMP PACKAGES

ORDERING OPTIONS

DELUXE TANK MOUNT OIL PACKAGES

Deluxe packages include SDX hose reel, air and fluid hoses with fittings, and mini air regulator.



Package Number	24K777	24K797	24K799	24K834
Ratio	3:1	3:1	3:1	3:1
Pump Part Number	24G576	24G576	24G576	24G576
Hose Reel Type	SDX	SDX	SDX	SDX
Hose Size	1/2 in x 50 ft	1/2 in x 50 ft	1/2 in x 50 ft	1/2 in x 35 ft
Hose Reel	SDM65B	SDM65B	SDM65B	SDM33B
Meter Type	Preset	Manual	Manual	Manual
Meter Part Number	256216	25C903	25C904	25C903
Meter Extension	Rigid	Rigid	Flexible	Rigid
Air and Fluid Hoses with Fittings	24J495	24J495	24J495	24J495
Mini Air Regulator with Gauge	24H420	24H420	24H420	24H420
Instruction Manual	3A1335	3A1335	3A1335	3A1335



LD SERIES 5:1 OIL PUMP PACKAGES

ORDERING OPTIONS

MOBILE OIL PACKAGES – CART

Self-relieving air regulator must be used for LD pump thermal relief function. Order regulator 24H420 or filter-regulator 133215 separately.



Package Number	24H916	24H915	24H918	24H917	24H941	24H940	24H943	24H942
Ratio	5:1	5:1	5:1	5:1	5:1	5:1	5:1	5:1
Pump Part Number	24G588	24G588	24G588	24G588	24G588	24G588	24G588	24G588
Suction Tube Size	200 L	200 L	200 L	200 L	200 L	200 L	200 L	200 L
Pump Downtube	16F886	16F886	16F886	16F886	16F886	16F886	16F886	16F886
Meter Type	Manual	Manual	Preset	Preset	Manual	Manual	Preset	Preset
Meter Part Number	25C903	25C904	256216	255277	25C903	25C904	256216	255277
Meter Extension	Rigid	Flexible	Rigid	Flexible	Rigid	Flexible	Rigid	Flexible
Hose Kit	24J495	24J495	24J495	24J495	24H865	24H865	24H865	24H865
Hose Reel Type	LDX	LDX	LDX	LDX	-	-	-	-
Hose Size	1/2 in x 50 ft	1/2 in x 50 ft	1/2 in x 50 ft	1/2 in x 50 ft	-	-	-	-
Hose Reel	HEM004	HEM004	HEM004	HEM004	-	-	-	-
55 gal Cart	24F915	24F915	24F915	24F915	24F915	24F915	24F915	24F915
Instruction Manual	3A1335	3A1335	3A1335	3A1335	3A1335	3A1335	3A1335	3A1335

OIL PUMPS AND PACKAGES



Package 24H941 installed on a 55 gallon drum (not included in package).

LD SERIES 5:1 OIL PUMP PACKAGES

ORDERING OPTIONS

MOBILE OIL PACKAGES – DOLLY

Self-relieving air regulator must be used for LD pump thermal relief function. Order regulator 24H420 or filter-regulator 133215 separately.



Package Number	25C555	25C557	25C554	25C556
Ratio	5:1	5:1	5:1	5:1
Pump Part Number	24G588	24G588	24G588	24G588
Container Size	16 gal (120 lb)	16 gal (120 lb)	55 gal (400 lb)	55 gal (400 lb)
Pump Downtube	16F878	16F878	16F886	16F886
Meter Type	Manual	Preset	Manual	Preset
Meter Part Number	25C903	256216	25C903	256216
Meter Extension	Rigid	Rigid	Rigid	Rigid
Hose Kit	24H865	24H865	24H865	24H865
Portable Base	131184	131184	129645	129645
Instruction Manual	3A1335	3A1335	3A1335	3A1335



ORDERING OPTIONS

WALL MOUNT OIL PACKAGES

Self-relieving air regulator must be used for LD pump thermal relief function. Order regulator 24H420 or filter-regulator 133215 separately.



Package Number	24H836	24H842
Ratio	5:1	5:1
Pump Part Number	24G588	24G588
Suction Tube Size	55 gal drum	275 gal tote
Suction Hose Kit	24F935	24H666
Hose Kit	-	24H859
Wall Mount Bracket	24F910	24F910
Instruction Manual	3A1335	3A1335



Package 24H842 installed on a 275 gallon tote (not included in package).

OIL PUMPS AND PACKAGES

STATIONARY OIL PACKAGES

Self-relieving air regulator must be used for LD pump thermal relief function. Order regulator 24H420 or filter-regulator 133215 separately.



Package Number	24H965	24H964	24H967	24H966
Ratio	5:1	5:1	5:1	5:1
Pump Part Number	24G588	24G588	24G588	24G588
Suction Tube Size	Universal	Universal	Universal	Universal
Pump Downtube	16F878	16F878	16F878	16F878
Meter Type	Manual	Manual	Preset	Preset
Meter Part Number	25C903	25C904	256216	255277
Meter Extension	Rigid	Flexible	Rigid	Flexible
Hose Kit	24H859	24H859	24H859	24H859
Instruction Manual	3A1335	3A1335	3A1335	3A1335

LD SERIES 5:1 OIL PUMP PACKAGES

ORDERING OPTIONS

STATIONARY OIL PACKAGES – TOTE

Standard packages include LD Series hose reel. Self-relieving air regulator must be used for LD pump thermal relief function. Order regulator 24H420 or filter-regulator 133215 separately.



Package Number	24H868	24H870	24H892	24H894
Ratio	5:1	5:1	5:1	5:1
Pump Part Number	24G588	24G588	24G588	24G588
Suction Tube Size	275 gal (1,040 l)	275 gal (1,040 l)	275 gal (1,040 l)	275 gal (1,040 l)
Pump Downtube	16F885	16F885	24H669	24H669
Mounting Position	Top	Top	Drain	Drain
Reel Type	LDX	LDX	LDX	LDX
Hose Reel Part Number	HEM004	HEM004	HEM004	HEM004
Hose Size	1/2 in x 35 ft	1/2 in x 35 ft	1/2 in x 35 ft	1/2 in x 35 ft
Reel Bracket Kit	24K285	24K285	24K285	24K285
Meter Type	Manual	Preset	Manual	Preset
Meter Part Number	25C903	256216	25C903	256216
Meter Extension	Rigid	Rigid	Rigid	Rigid
Hose Kit	6 ft x 3/8 in air hose / 6 ft x 1/2 in fluid hose	6 ft x 3/8 in air hose / 6 ft x 1/2 in fluid hose	6 ft x 3/8 in air hose / 6 ft x 1/2 in fluid hose	6 ft x 3/8 in air hose / 6 ft x 1/2 in fluid hose
Hose Kit Part Number	24J495	24J495	24J495	24J495
Top Mount Tote Bracket	24F930	24F930	24F931	24F931
Tote Mount Pump Bracket	-	-	24F920	24F920
Meter Tray	24F914	24F914	24F914	24F914
Instruction Manual	3A1335	3A1335	3A1335	3A1335



ORDERING OPTIONS

DELUXE STATIONARY OIL PACKAGES – TOTE

Deluxe packages include SDX Series hose reel. Self-relieving air regulator must be used for LD pump thermal relief function. Order regulator 24H420 or filter-regulator 133215 separately.



Package Number	24K839	24K843
Ratio	5:1	5:1
Pump Part Number	24G588	24G588
Suction Tube Length	275 gal (1,040 l)	275 gal (1,040 l)
Pump Downtube	16F885	16F885
Reel Type	SDX	SDX
Hose Reel Part Number	SDM65B	SDM65B
Hose Reel Bracket	24K285	24K285
Meter Type	Preset	Manual
Meter Part Number	256216	25C904
Meter Extension	Rigid	Flexible
Hoses and Fittings	24J495	24J495
Top Mount Tote Bracket	24F930	24F930
Meter Tray	24F914	24F914
Instruction Manual	3A1335	3A1335

LD SERIES 5:1 OIL PUMP PACKAGES

ORDERING OPTIONS

OIL PACKAGES – TANK MOUNT

Self-relieving air regulator must be used for LD pump thermal relief function. Order regulator 24H420 or filter-regulator 133215 separately.



Package Number	24J777	24J735	24J736	24K837
Ratio	5:1	5:1	5:1	5:1
Pump Part Number	24G588	24G588	24G588	24G588
Reel Type	LDX	SDX	SDX	SDX
Hose Reel Part Number	HEM004	SDM65B	SDM65B	SDM65B
Meter Type	Manual	Manual	Preset	Manual
Meter Part Number	25C903	25C903	256216	25C904
Meter Extension	Rigid	Rigid	Rigid	Flexible
Inlet Kit	25U371	218549	218549	218549
Instruction Manual	3A1335	3A1335	3A1335	3A1335



ORDERING OPTIONS

DELUXE OIL PACKAGES – TANK MOUNT

Deluxe packages include SDX hose reel, air and fluid hoses with fittings, and mini air regulator.





Package Number	24K796	24K798	24K800	24K835
Ratio	5:1	5:1	5:1	5:1
Pump Part Number	24G588	24G588	24G588	24G588
Reel Type	SDX	SDX	SDX	SDX
Hose Size	1/2 in x 50 ft (12.7 mm x 15 m)	1/2 in x 50 ft (12.7 mm x 15 m)	1/2 in x 50 ft (12.7 mm x 15 m)	1/2 in x 35 ft (12.7 mm x 10.6 m)
Hose Reel Part Number	SDM65B	SDM65B	SDM65B	SDM33B
Meter Type	Preset	Manual	Manual	Manual
Meter Part Number	256216	25C903	25C904	25C903
Meter Extension	Rigid	Rigid	Flexible	Rigid
Air and Fluid Hoses with Fittings	24J495	24J495	24J495	24J495
Mini Air Regulator with Gauge	24H420	24H420	24H420	24H420
Instruction Manual	3A1335	3A1335	3A1335	3A1335


LD SERIES OIL PUMP ACCESSORIES

ORDERING OPTIONS


AIR REGULATORS

	Part Number	Description
	24H420	Mini air pressure regulator with gauge, 1/4 in NPT x 3/8 in NPT, self-relieving
	133215	Mini air filter-regulator with gauge, 1/4 in NPT, self-relieving, semi-auto drain


CARTS

	Part Number	Description
	24F915	Drum cart with pneumatic wheels for 55 gallon drums, includes chain for securing drum to cart


LD DRUM DOLLIES

	Part Number	Description
	131183	Drum dolly for 35 lb (16 kg) drum
	131184	Drum dolly for 120 lb (54 kg) drum
	129645	Drum dolly for 400 lb (182 kg) drum


DOWNTUBES

	Part Number	Description
	16F878	Universal cut to length PVC downtube
	16F886	Drum length steel downtube
	16F885	Tote length steel downtube

DRUM COVERS

	Part Number	Description
	24F904	Cover for 35 lb (16 kg) pails
	24F905	Cover for open-head 120 lb drums
	24F906	Cover for open-head 400 lb drums


HOSE AND FITTING KITS

	Part Number	Description	Kit Includes			
			Fluid Hose	Air Hose	Swivel	Union Fitting
	24H865	15 ft LD pump fluid hose kit	1/2 in x 15 ft	3/8 in x 6 ft	157705	156684
	24H859	6 ft LD pump fluid hose kit	1/2 in x 6 ft	3/8 in x 6 ft	157705	156684





ORDERING OPTIONS







SUCTION KITS

	Part Number	Description
	24F935	LD oil pump suction hose kit for 55 gal (200 L) drum. Includes 55 gal (200 L) drum length metal downtube, bung adapter, foot valve and 6 ft of 1 in suction hose
	24H666	LD oil pump suction hose kit for 275 gal (1,040 L) drum. Includes 275 gal (1,040 L) tote length metal downtube, bung adapter, foot valve and 6 ft of 1 in suction hose
	24H669	LD oil pump suction hose kit and adapter for mounting pump to the side of IBC tote and dispensing from drain. Includes 1 in x 3 ft suction hose, 1 in elbow fitting and union fitting (160022)

MOUNTING HARDWARE

	Part Number	Description
	24F910	LD Series pump wall mounting bracket
	24F918	Bung adapter

TOTE MOUNT ACCESSORIES

	Part Number	Description
	24F914	Meter drip tray for mounting to the side of IBC tote
	24F932	LD Series reel bracket for mounting reel to IBC top mount tote bracket (24F930 and 24F920)
	24F931	Tote mounting bracket to mount reel on top of IBC tote (pump mounting bracket is not included)
	24F930	Top of tote mounting bracket. For mounting LD Series pump in top of IBC tote.
	24F920	Bracket for mounting LD Series pump on the side of IBC tote
	24K285	Bracket for mounting SDX Series hose reel to IBC tote mounting bracket 24F930 (24F930 bracket sold separately)

MINI FIRE-BALL® 225 OIL PUMPS

PERFECT FOR MEDIUM PRESSURE, LOW-VOLUME APPLICATIONS

You can't afford downtime, especially when your shop is small. The Mini Fire-Ball 225 is designed with fewer moving parts, which means less wear and tear and reduced downtime, allowing you to run a more profitable business.



Durable Casting

Thick cast aluminum air motor housing offers unmatched durability.

Fewer Repairs

Fewer moving parts in the air motor assembly means less downtime and low repair cost.

Extended Seal Life

In-line pump design aligns the air motor piston and fluid piston rods to maximize seal life.

Superior Sealing

Non-metallic poppet valves offer positive sealing performance, even with contaminated "dirty" air environments for long life without repair.

Corrosion-Resistant

Corrosion-resistant design utilizes liquid salt nitriding, nickel plating, stainless steel, aluminum and chrome on key components for longer life.


TYPICAL APPLICATIONS

- Automotive dealerships
- Fast lube centers
- Service shops
- Heavy-duty dealerships
- Fleet services facilities
- In-plant
- Lube trucks
- Mining

TYPICAL FLUIDS

- Petroleum- and synthetic-based oils (motor, gear and ATF)

PUMP PERFORMANCE

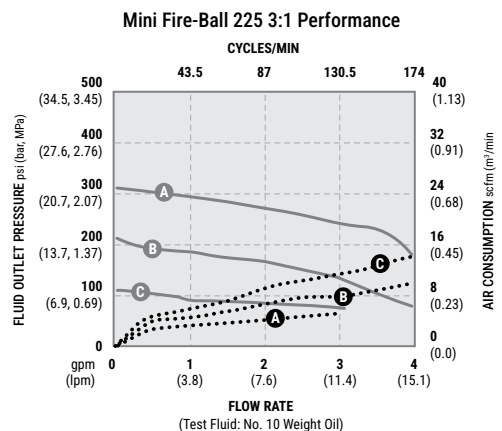

AIR PRESSURE	
(A)	= at 100 psi (6.9 bar, 0.69 MPa)
(B)	= at 70 psi (4.8 bar, 0.48 MPa)
(C)	= at 40 psi (2.8 bar, 0.28 MPa)
LEGEND	
Air Consumption
Fluid Pressure	———



TECHNICAL SPECIFICATIONS

Fluid Pressure Ratio	3:1
Air Motor Effective Diameter	2.25 in (57.2 mm)
Maximum Fluid Working Pressure	540 psi (37 bar / 3.7 MPa)
Approximate Free Flow Rate @ 100 psi	8.3 gal/min (32 liters/min)
Output per Cycle	87 cc
Approximate Air Use and Flow @ 100 psi (80 cpm)	9 scfm @ 1.9 gpm (0.25 m ³ /min @ 7.2 lpm)
Air Inlet	3/8 in NPT(F)
Fluid Inlet	1-1/2 in NPT(F)
Fluid Outlet	1/2 in NPT(F)
Air Operation Range	40 psi to 180 psi (2.8 bar to 12 bar)
Maximum Recommended Pump Speed	100 cpm
Cycles per Gallon (Liter)	43.5 (11.5)
Wetted Parts	Steel, Buna-N, polyurethane, aluminum, Rulon®
Sound Pressure Level	77.8 dB(A)
Sound Power Level	85.6 dB(A)
Approximate Weight	16 lb (7.3 kg)
Instruction Manual	309868

ORDERING OPTIONS

MINI FIRE-BALL 225 3:1 PUMPS

Part Number	Description
246775	3:1 Universal oil pump
248097	3:1 Universal oil pump with suction tube (15C502) and bung adapter (222308)

MINI FIRE-BALL 225 3:1 OIL PUMP PACKAGES

ORDERING OPTIONS

OIL PACKAGES



Package Number	246903*	246904*	246906*	246907**	248230**
Ratio	3:1	3:1	3:1	3:1	3:1
Package Type	Portable	Cover-mounted	Cover-mounted	Bung-mounted	Bung-mounted
Maximum Container Size	16 gal (60 l)	16 gal (60 l)	55 gal (200 l)	55 gal (200 l)	275 gal (1,040 l)
Pump	248097	248097	248097	248097	246775
Meter Type	Manual	-	-	-	-
Meter Part Number	25M413	-	-	-	-
Meter Extension	Rigid	-	-	-	-
Dispense/ Hose Fitting Kit	237075	222063	222063	222063	222062
Fluid Hose Size	1/2 in x 6 ft (12.7 mm x 1.8 m)	1/2 in x 6 ft (12.7 mm x 1.8 m)	1/2 in x 6 ft (12.7 mm x 1.8 m)	1/2 in x 6 ft (12.7 mm x 1.8 m)	1/2 in x 1.5 ft (12.7 mm x 0.46 m)
Air Hose Size	-	3/8 in x 6 ft (9.5 mm x 1.8 m)	3/8 in x 6 ft (9.5 mm x 1.8 m)	3/8 in x 6 ft (9.5 mm x 1.8 m)	3/8 in x 1.5 ft (9.5 mm x 0.46 m)
Air Regulator	224512	224512	224512	-	-
Pump Shim	17C270	17C270	17C270	-	-
Cover	24R350	24R350	200326	-	-
Caster Base	203622	-	-	-	-
Instruction Manual	307884	307883	307883	307883	309868


*Order low-level shut-off (203688) (1-1/2 in NPT) separately for metered dispense systems.

**Order low-level shut-off (203688) (1-1/2 in NPT) separately for metered dispense systems. Use 3/8 in (9.5 mm) air regulator (109075) as required; must be ordered separately.



ORDERING OPTIONS

BULK OIL DISPENSING PACKAGES

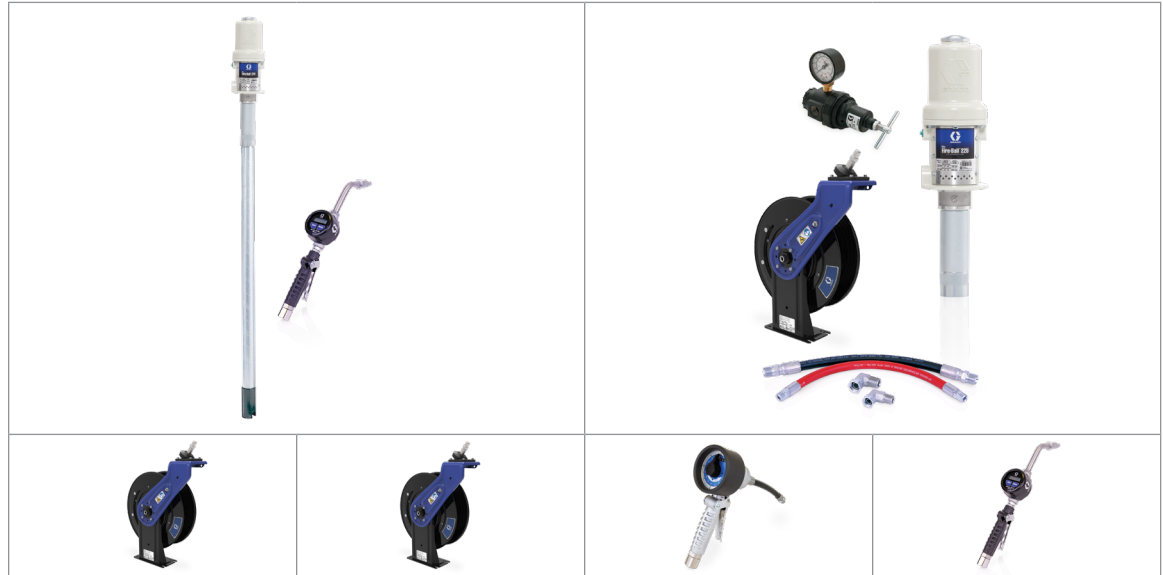

Package Number	248623*	248622*	24F205	24F206
Ratio	3:1	3:1	3:1	3:1
Pump	248097	248097	246775	246775
Bung Adapter	-	-	222308	222308
Reel Size	1/2 in x 50 ft (12.7 mm x 15.2 m)	1/2 in x 35 ft (12.7 mm x 11 m)	1/2 in x 50 ft (12.7 mm x 15.2 m)	1/2 in x 50 ft (12.7 mm x 15.2 m)
Reel Type	SDX	SDX	SDX	SDX
Hose Reel	SDM65B	SDM33B	SDM65B	SDM65B
Meter Type	EM8	EM8	Mechanical	EM8
Manual/Preset	Manual	Manual	Manual	Manual
Meter	25C903	25C903	24V034	25C903
Installation Kit	-	-	222062	222062
Air Regulator	-	-	109075	109075
Instruction Manual	309868, 312668, 313431	309868, 312668, 313431	309868, 313431	309868, 313431

*Order (218549) (1/2 in x 24 in) hose kit separately.

FIRE-BALL 300 5:1 OIL PUMPS

IDEAL FOR MEDIUM-SIZED SHOPS WITH HIGH-PRESSURE OIL TRANSFER

Install the Fire-Ball 300 in high-pressure, medium-volume oil dispense applications such as automotive dealerships, fast lube centers and service shops. A three inch differential air motor ensures smooth pumping, and the smooth double-acting pump design provides reliable fluid flow and accurate dispense.



Durable Casting

Thick cast aluminum air motor housing offers unmatched durability.

Fewer Repairs

Fewer moving parts in the air motor assembly means less downtime and low repair cost.

Extended Seal Life

In-line pump design aligns the air motor piston and fluid piston rods to maximize seal life.

Superior Sealing

Non-metallic poppet valves offer positive sealing performance, even with contaminated "dirty" air environments for long life without repair.

Corrosion-Resistant

Corrosion-resistant design utilizes liquid salt nitriding, nickel plating, stainless steel, aluminum and chrome on key components for longer life.


TYPICAL APPLICATIONS

- Automotive dealerships
- Fast lube centers
- Service shops
- Heavy-duty dealerships
- Fleet services facilities
- In-plant
- Lube trucks
- Mining

TYPICAL FLUIDS

- Petroleum- and synthetic-based oils (motor, gear and ATF)

PUMP PERFORMANCE

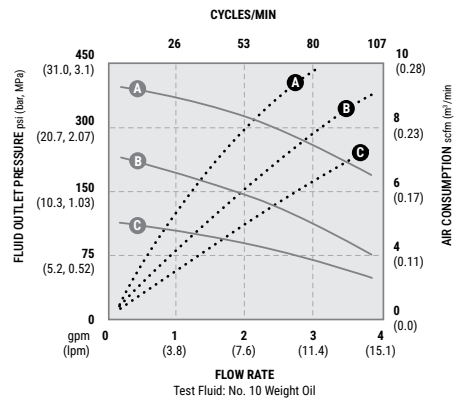

AIR PRESSURE	
(A)	= at 100 psi (6.9 bar, 0.69 MPa)
(B)	= at 70 psi (4.8 bar, 0.48 MPa)
(C)	= at 40 psi (2.8 bar, 0.28 MPa)
LEGEND	
.....	Air Consumption
—	Fluid Pressure



TECHNICAL SPECIFICATIONS

Fluid Pressure Ratio	5:1
Air Motor Effective Diameter	3 in (76.2 mm)
Maximum Fluid Working Pressure	900 psi (62 bar / 6.2 MPa)
Approximate Free Flow Rate @ 100 psi	12.1 gal/min (46 liters/min)
Output per Cycle	133 cc
Approximate Air Use and Flow @ 100 psi (80 cpm)	16 scfm @ 2.8 gpm (0.45 m ³ /min @ 10.6 lpm)
Air Inlet	3/8 in NPT(F)
Fluid Inlet	1-1/2 in NPT(F)
Fluid Outlet	1/2 in NPT(F)
Air Operation Range	40 psi to 180 psi (2.8 bar to 12 bar)
Maximum Recommended Pump Speed	70 cpm
Cycles per Gallon (Liter)	28.4 (7.5)
Wetted Parts	Steel, polyurethane, aluminum, Buna-N
Sound Pressure Level	77.8 dB(A)
Sound Power Level	85.6 dB(A)
Approximate Weight	17 lb (7.7 kg)
Instruction Manual	306518

ORDERING OPTIONS

FIRE-BALL 300 5:1 PUMPS

Part Number	Description
203876	5:1 Universal oil pump
203872	5:1 Oil pump, 16 gal (120 lb) drum size, for cover mount
203857	5:1 Oil pump, 55 gal (400 lb) drum size, for cover mount
204254	5:1 Oil pump, 55 gal (400 lb) drum size, bung mount
222087	5:1 Oil pump, 275 gal (1,040 lb) tank size, bung mount

FIRE-BALL 300 5:1 OIL PUMP PACKAGES

ORDERING OPTIONS

OIL PUMP PACKAGES



Package Number	225728*	225094**	225642**	225640**	225931**	225852**
Ratio	5:1	5:1	5:1	5:1	5:1	5:1
Package Type	Portable	Cover-mounted	Cover-mounted	Bung-mounted	Bung-mounted	Universal
Maximum Container Size	16 gal (60 l)	16 gal (60 l)	55 gal (200 l)	55 gal (200 l)	275 gal (1,040 l)	Universal
Pump	203872	203872	203857	204254	222087	203876
Meter Type	Manual	-	-	-	-	-
Meter Part Number	25M413	-	-	-	-	-
Meter Extension	Rigid	-	-	-	-	-
Dispense/ Hose Fitting Kit	237075	222063	222063	222063	222063	222062
Fluid Hose Size	1/2 in x 6 ft (12.7 mm x 1.8 m)	1/2 in x 6 ft (12.7 mm x 1.8 m)	1/2 in x 6 ft (12.7 mm x 1.8 m)	1/2 in x 6 ft (12.7 mm x 1.8 m)	1/2 in x 6 ft (12.7 mm x 1.8 m)	1/2 in x 1.5 ft (12.7 mm x 0.46 m)
Air Hose Size	-	3/8 in x 6 ft (9.5 mm x 1.8 m)	3/8 in x 6 ft (9.5 mm x 1.8 m)	3/8 in x 6 ft (9.5 mm x 1.8 m)	3/8 in x 6 ft (9.5 mm x 1.8 m)	3/8 in x 1.5 ft (9.5 mm x x 0.46 m)
Air Regulator	224512	224512	224512	-	-	-
Cover	24R350	24R350	200326	-	-	-
Caster Base	203622	-	-	-	-	-
Bung Adapter	-	-	-	222308	222308	-
Instruction Manual	307884	307883	307883	307883	307883	306520

*Order low-level cut-off (203688) (1-1/2 in NPT) separately for metered dispense systems. Use 3/8 in (9.5 mm) installation kit (224512) as required.

**Order low-level cut-off (203688) (1-1/2 in NPT) separately for metered dispense systems. Use 3/8 in (9.5 mm) air regulator (109075) as required; must be ordered separately.



ORDERING OPTIONS


BULK OIL DISPENSING PACKAGES



Package Number	241633*	224541*	244038*	224534*
Ratio	5:1	5:1	5:1	5:1
Dispensing Location	-	-	-	Bench/Top Tank
Pump	203876	203876	203876	203876
Regulator/Gauge	109075	109075	109075	109075
Nipple	156849	156849	156849	156849
Bung Adapter	222308	222308	222308	222308
Reel Size	1/2 in x 35 ft	1/2 in x 50 ft	1/2 in x 50 ft	1/2 in x 50 ft
Reel Type	SDX	SDX	SDX	SDX
Hose Reel	SDM33B	SDM65B	SDM65B	SDM65B
Type of Meter	SD	SD	SD	SD
Manual/Preset	Manual	Manual	Preset	Manual
Meter	25M404	25M404	26C384	25M404
90° Swivel	-	-	-	157416
Air Filter	-	-	-	106148
Drain Valve	-	-	-	127711
Hose	-	220598	220598	222063
Thermal Relief Valve	-	-	-	237893
Hose Reel Inlet Kit (Not Included)	218549	218549	218549	218549

*Order (218549) (1/2 in x 24 in) hose reel inlet kit separately.

Package 224534 installed on a bulk tank
(not included in package).



FIRE-BALL 300 5:1 OIL PUMP PACKAGES

ORDERING OPTIONS

LUBE TRUCK PACKAGES



Package Number	222086*	206655*	204264*
Ratio	5:1	5:1	5:1
Package Type	Lube truck	Lube truck	Lube truck
Maximum Container Size	16 gal (60l) open-head	55 gal (200l) closed-head	55 gal (200l) closed-head
Pump	203872	203857	204254
Dispense/ Hose Fitting Kit	222063	222063	222063
Fluid Hose Size	1/2 in x 6 ft (12.7 mm x 1.8 m)	1/2 in x 6 ft (12.7 mm x 1.8 m)	1/2 in x 6 ft (12.7 mm x 1.8 m)
Cover	222060	207367	-
Pump Clamp	-	-	204095
Hold Down Kit	222061	207361	207361
Bung Adapter	-	-	224579
Instruction Manual	307883	307883	307883


*Order 3/8 in (9.5 mm) air regulator and gauge (109075) separately.



FIRE-BALL 425 OIL PUMPS

THE PUMP OF CHOICE FOR YOUR MOST DEMANDING HIGH-VOLUME APPLICATIONS

The Fire-Ball 425 features a 4.25 inch air motor to supply the power you need for long pipe runs and higher-volume dispensing. An ideal choice for applications where multiple dispenses happen at the same time.

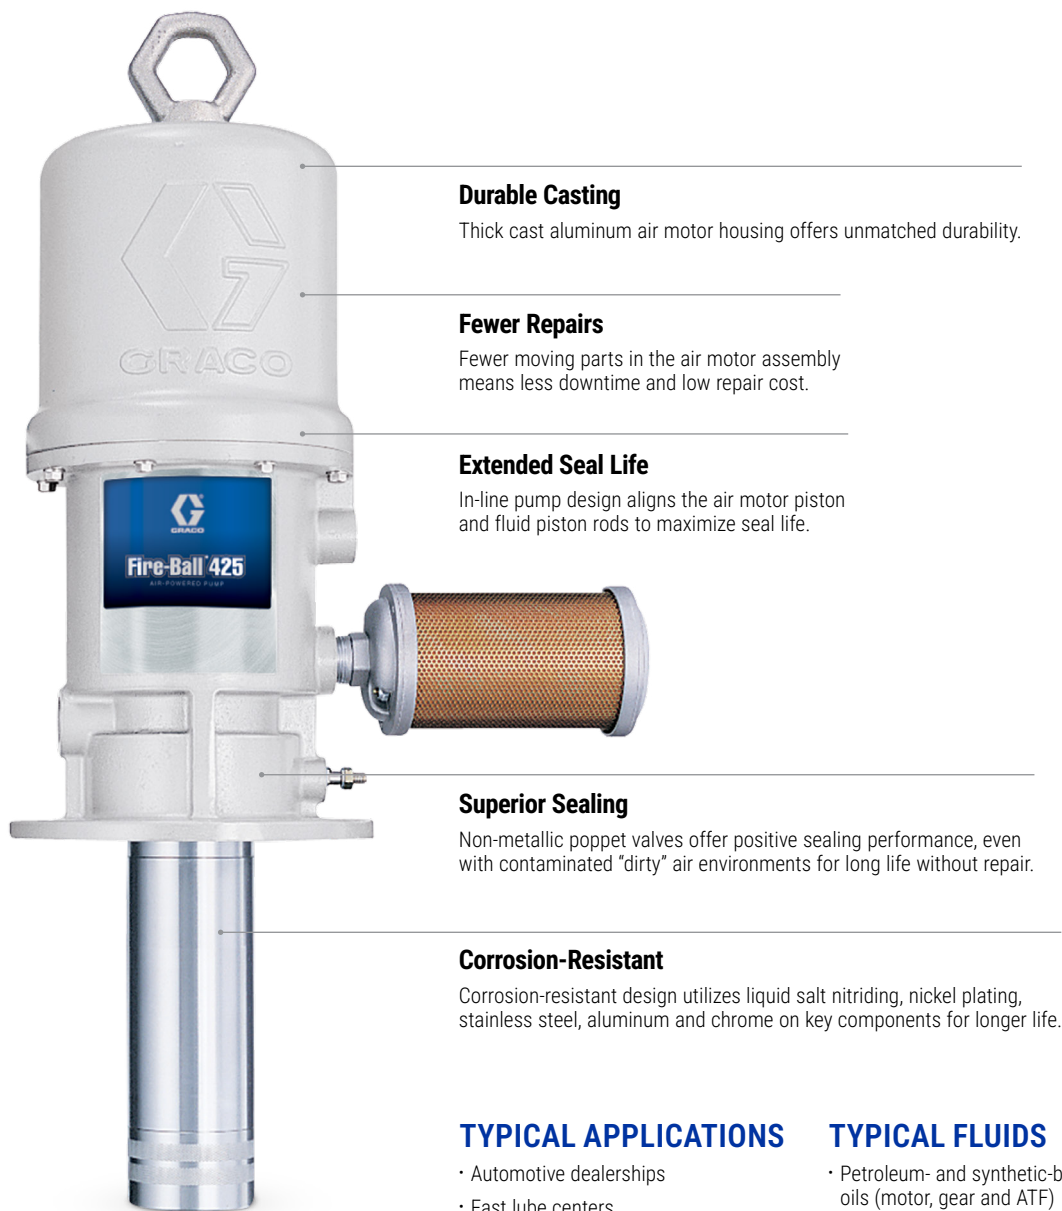

Durable Casting

Thick cast aluminum air motor housing offers unmatched durability.

Fewer Repairs

Fewer moving parts in the air motor assembly means less downtime and low repair cost.

Extended Seal Life

In-line pump design aligns the air motor piston and fluid piston rods to maximize seal life.

Superior Sealing

Non-metallic poppet valves offer positive sealing performance, even with contaminated "dirty" air environments for long life without repair.

Corrosion-Resistant

Corrosion-resistant design utilizes liquid salt nitriding, nickel plating, stainless steel, aluminum and chrome on key components for longer life.

TYPICAL APPLICATIONS

- Automotive dealerships
- Fast lube centers
- Service shops
- Heavy-duty dealerships
- Fleet services facilities
- In-plant
- Lube trucks
- Mining

TYPICAL FLUIDS


- Petroleum- and synthetic-based oils (motor, gear and ATF)

OIL PUMPS AND PACKAGES


FIRE-BALL 425 OIL PUMP PACKAGES

PUMP PERFORMANCE


FIRE-BALL 425 3:1 PUMPS

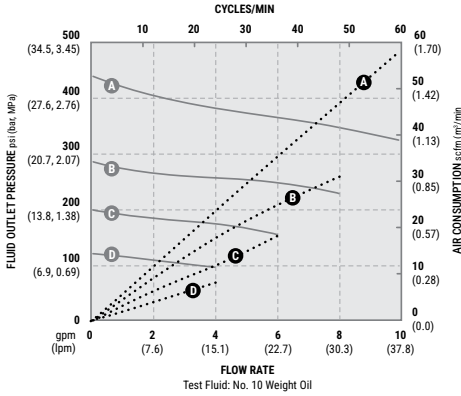

FIRE-BALL 425 6:1 PUMPS

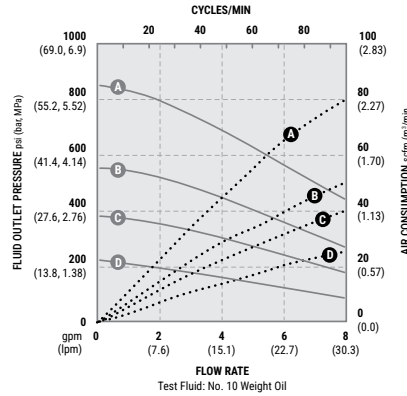

FIRE-BALL 425 10:1 PUMPS

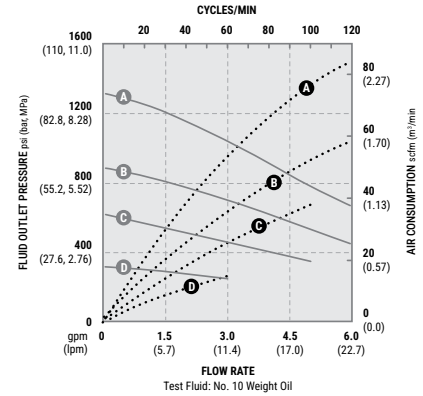

AIR PRESSURE

- (A) = at 150 psi (10.3 bar, 1.03 MPa)
- (B) = at 100 psi (6.9 bar, 0.69 MPa)
- (C) = at 70 psi (4.8 bar, 0.48 MPa)
- (D) = at 40 psi (2.8 bar, 0.28 MPa)

LEGEND

- Air Consumption
- Fluid Pressure ———

TECHNICAL SPECIFICATIONS

Fluid Pressure Ratio	3:1	6:1	10:1
Air Motor Effective Diameter	4.25 in (107.9 mm)		
Maximum Fluid Working Pressure	540 psi (37 bar / 3.7 MPa)	1,100 psi (76 bar / 7.6 MPa)	1,800 psi (124 bar / 12.4 MPa)
Approximate Free Flow Rate @ 100 psi	28.7 gal/min (109 liters/min)	17.1 gal/min (65 liters/min)	11.7 gal/min (44 liters/min)
Output per Cycle	631 cc	261 cc	189 cc
Approximate Air Use and Flow @ 100 psi (80 cpm)	43 scfm @ 13.4 gpm (1.23 m ³ /min @ 50.6 lpm)	44 scfm @ 6.7 gpm (1.25 m ³ /min @ 25.4 lpm)	45 scfm @ 4.0 gpm (1.27 m ³ /min @ 15.2 lpm)
Air Inlet	1/2 in NPT(F)		
Fluid Inlet	1-1/2 in NPT(F)		
Fluid Outlet	3/4 in NPT(F)		
Air Operation Range	40 psi to 180 psi (2.8 bar to 12 bar)		
Maximum Recommended Pump Speed	66 cpm	78 cpm	60 cpm
Cycles per Gallon (Liter)	6 (1.6)	14.5 (3.8)	20 (5.3)
Wetted Parts	Steel, polyurethane, aluminum, nitrile		
Sound Pressure Level	82 dB(A)	79.5 dB(A)	78 dB(A)
Approximate Weight	46 lb (20.9 kg)	35 lb (15.9 kg)	29 lb (13.2 kg)
Instruction Manual	308485	308608	308655



ORDERING OPTIONS

FIRE-BALL 425 PUMPS

Part Number	Description
237526	3:1 Universal oil pump
238108	6:1 Universal oil pump
205626	10:1 Universal oil pump
222065	10:1 Oil pump, 55 gal (400 lb) drum size, cover mount
222095	10:1 Oil pump, 55 gal (400 lb) drum size, bung mount

OIL PUMP PACKAGES



Package Number	244846	244628*	244847	225782**	225786**	225853**
Package Type	Wall-mounted	Wall-mounted	Wall-mounted	Cover-mounted	Bung-mounted	Universal supply
Maximum Container Size	Universal	Universal	Universal	55 gal (200 l)	55 gal (200 l)	Universal
Ratio	3:1	6:1	10:1	10:1	10:1	10:1
Pump	237526	238108	205626	222065	222095	205626
Hose/Fitting Kit	222068	222068	222068	222066	222066	222068
Fluid Hose Size	3/4 in x 1.5 ft	3/4 in x 1.5 ft	3/4 in x 1.5 ft	3/4 in x 6 ft	3/4 in x 6 ft	3/4 in x 1.5 ft
Air Hose Size	1/2 in x 1.5 ft	1/2 in x 1.5 ft	1/2 in x 1.5 ft	1/2 in x 6 ft	1/2 in x 6 ft	1/2 in x 1.5 ft
Cover	-	-	-	200326	-	-
Filter, Regulator, Lubricator [FRL]	217072	217072	217072	-	-	-
Air Shutoff Valve	110225	110225	110225	-	-	-
Fluid Shutoff Valve	108537	108537	108537	-	-	-
Wall Mount Bracket	238245	238245	238245	-	-	-
Instruction Manual	309351	309351	309351	307883	307883	306520

*Order low-level cut-off (203688) (1-1/2 in NPT) separately for metered dispense systems.

**Order low-level cut-off (203688) (1-1/2 in NPT) separately for metered dispense. Use 1/2 in (12.7 mm) air regulator (104266) and air pressure gauge (100960) as required; must be ordered separately.

FIRE-BALL 425 OIL PUMP PACKAGES

ORDERING OPTIONS

LUBE TRUCK PACKAGES



Package Number	206656*	222067*
Ratio	10:1	10:1
Package Type	Lube truck	Lube truck
Maximum Container Size	55 gal (200 l) closed-head	55 gal (200 l) closed-head
Pump	222065	222095
Dispense/ Hose Fitting Kit	222066	222066
Fluid Hose Size	1/2 in x 6 ft (12.7 mm x 1.8 m)	1/2 in x 6 ft (12.7 mm x 1.8 m)
Offset Cover	207367	-
Pump Clamp	-	204095
Hold Down Kit	207361	207361
Bung Adapter	-	224579
Instruction Manual	307883	307883

*Order 1/2 in (12.7 mm) air regulator (104266) and gauge (100960) separately.



OIL PUMP ACCESSORIES GUIDE

Use the quick-reference guide below to determine the part and accessory options available for our most popular oil pumps.



OIL PUMP MOUNTING AND ACCESSORY GUIDE

Pump	Fast-Ball 100	Mini Fire-Ball 225 3:1	Fire-Ball 300 5:1	Fire-Ball 425 3:1	Fire-Ball 425 6:1	Fire-Ball 425 10:1
Bung Adapter	222308	222308	222308	-	-	222308
Connection Hose Kit	222118 (18 in / 4537 cm)	222062 (18 in / 45.7 cm)	222062 (18 in / 45.7 cm)	238246 (24 in / 60.9 cm)	238246 (24 in / 60.9 cm)	222068 (18 in / 4537 cm)
	222119 (72 in / 182.8 cm)	222063 (72 in / 182.8 cm)	222063 (72 in / 182.8 cm)			222066 (72 in / 182.8 cm)
Wall Mounting Bracket	203987	203987	203987	238245	238245	203987
Thermal Relief Kit*	-	235998	237893	237601	240429	240429
Air Regulator and Gauge	110147	109075	109075	104266 / 100960	104266 / 100961	104266 / 100962
Air Filter	110146	106148	106148	106149	106149	106149
Air Lubricator	110148	214847	214847	214848	214848	214848
Filter, Regulator, Lubricator and Gauge	110149	110150	110150	217072	217072	217072
Airline Shutoff Valve	110223	110224	110224	110225	110225	110225
Fluid Shutoff Valve	108537	108458	108458	108537	108537	108537
Fluid Outlet Filter	240417	240417	240417	101078	-	-
Low-Level Cutoff	203688	203688	203688	203688	203688	203688
Suction Hose Kit	236054	236054	236054	-	-	-


*Required

OIL PUMPS AND PACKAGES



OIL PUMP ACCESSORIES

ORDERING OPTIONS


BLEED-TYPE AIR SHUT-OFF VALVES

	Part Number	Description
	110223	1/4 in NPT
	110224	3/8 in NPT
	110225	1/2 in NPT
	110226	3/4 in NPT


BUNG ADAPTERS

	Part Number	Description	Compatible Pumps	Includes				
				Double Tap bushing	Bushing Sleeve	1 ft x 3/8 in Hose	90° 3/8 in Adapter	Thumb Screw
	222308	Allows direct mounting of all universal length and extended pumps to standard 2 NPT drum bung	Fast-Ball 100 Mini Fire-Ball 225 3:1 Fire-Ball 300 5:1 Fire-Ball 425 10:1	-	-	-	-	-
	187754	Acetal bung adapter	All pumps	-	-	-	-	100220
	176684	Bung adapter for suction kit 203992	-	-	-	-	-	100220
	238125	For mounting universal pumps to tanks	Mini Fire-Ball 225 3:1 Fire-Ball 300 5:1 Fire-Ball 425 10:1	191075	172405	238370	155494	-


CARTS

	Part Number	Compatible Container Size
	203650	5 gal (20 l) 10 gal (40 l) 16 gal (60 l)
	222243	120 lb (55 kg)
	111470	55 gal (200 l)

CLAMPS

	Part Number	Description	Compatible Pumps
	203156	Used to hold pump securely to the edge of an open top drum	Fast-Ball 100 Mini Fire-Ball 225 3:1 Fire-Ball 300 5:1 Fire-Ball 425 6:1 Fire-Ball 425 10:1


DISPENSE KITS FOR MINI FIRE-BALL AND FIRE-BALL 300 PUMPS

	Part Number	Description	Hose Length	Includes		
	237075	Use with portable lubricators powered by Fire-Ball 300 Pump	6 ft	Fluid Hose	Manual SD Gear Lube Valve	Manual
				220591	255349	307884




ORDERING OPTIONS


DOWNTUBE – UNIVERSAL FIREBALL OIL PUMPS

	Part Number	Description
	15C502	1-1/2 in ID tube marked for standard container lengths from 20 in to 41 in (.51 m to 1.04 m)


DRUM COVERS

	Part Number	Container Size	Compatible Pumps
	200326	55 gal (200 l)	Mini Fire-Ball 225 3:1 Fire-Ball 300 5:1 Fire-Ball 425 10:1
	24R350	16 gal (60 l)	Fast-Ball 100 Mini Fire-Ball 225 3:1 Fire-Ball 300 5:1 Fire-Ball 425 3:1, 6:1, 10:1
	222058	5 gal (20 l)	Fast-Ball 100 Mini Fire-Ball 225 3:1 Fire-Ball 300 5:1, 15:1
	160754	55 gal (200 l) 16 gal (60 l) 5 gal (20 l)	Bung-mounted pumps


DRUM ELEVATOR

	Part Number	Description	Includes		
			Cover Support	Drum Elevator	Air Control Kit
	241663	Air-powered elevator to speed up 55 gal (200 l) drum changes	207562	204385	207561

FLUID SHUT-OFF VALVES

	Part Number	Description
	108458	1/2 in NPT
	108537	3/4 in NPT
	110314	1 in NPT


FLUID T-STRAINERS

	Part Number	Description
	240417	1/2 in inlet, 60 mesh strainer, which prevents foreign material from entering dispense lines
	240418	3/8 in inlet, 60 mesh strainer, which prevents foreign material from entering dispense lines
	238433	40 mesh replacement element, 3 count
	238434	40 mesh replacement element, 25 count
	238431	60 mesh (standard) replacement element, 3 count
	238432	60 mesh (standard) replacement element, 25 count
	238429	100 mesh replacement element, 3 count



OIL PUMP ACCESSORIES

ORDERING OPTIONS


FLUID Y-STRAINERS

	Part Number	Description
	110877	1/2 in NPT inlet/outlet strainer, which filters material before entering the pump
	110906	1/2 in NPT inlet/outlet strainer, replacement screen
	101078	3/4 in NPT inlet/outlet strainer, which filters material before entering the pump
	129699	3/4 in NPT inlet/outlet strainer, replacement screen
	110878	1 in NPT inlet/outlet strainer, which filters material before entering the pump
	110907	1 in NPT inlet/outlet strainer replacement screen

HOSE AND FITTING KITS FOR MINI FIRE-BALL 225 AND FIRE-BALL 300 5:1

	Part Number	Description	Connection Length	Includes			
				Air Hose	Air Hose Swivel Elbow	Fluid Hose	Fluid Hose Swivel Elbow
	222062	For connecting wall-mounted pumps to piping	18 in	204560	155494	220598	155470
	222063	Use with drum-mounted pumps	6 ft	203320	155494	220591	155470


HOSE AND FITTING KITS FOR FIRE-BALL 425 PUMPS

	Part Number	Description	Hose Length	Package Includes				
				Air Hose	Air Hose Swivel Elbow	Fluid Hose	Fluid Hose Swivel Elbow	Manual
	222068	For connecting wall-mounted Fire-Ball 425 10:1 pump to piping	15 in	218093	155470	109108	160327	306520
	238246	For connecting wall-mounted Fire-Ball 425 3:1 and 6:1 pumps to piping	24 in	218903	155470	238247	160327	306520
	222066	For use with drum-mounted Fire-Ball 425 10:1 pump	6 ft	205418	155470	109105	160327	307883





ORDERING OPTIONS

LOW-LEVEL CUTOFFS FOR FAST-BALL AND FIRE-BALL PUMPS


	Part Number	Description
	203688	1-1/2 in NPT cutoff, which prevents air from entering pump when fluid supply from pump is exhausted

PORTABLE BASES


	Part Number	Description	Compatible Container Size
	205054	Band dolly	5 gal (20 l)
	204144	Band dolly	10 gal (40 l) 16 gal (60 l)
	203622	Caster base	5 gal (20 l) 10 gal (40 l) 16 gal (60 l)

RUNAWAY VALVE


Prevents pump damage by automatically closing the air line to stop the pump when a runaway pump condition occurs due to an empty barrel or hose leak.

	Part Number	Inlet
	224040	3/4 in NPT(fbe)

SEALED BUNG ADAPTERS

	Part Number	Fire-Ball Length	Adapter Inside Diameter	Compatible Pumps
	204076	Full length	2.140 in	Mini Fire-Ball 225 3:1
	224579	Universal length	2.159 in	All except Mini Fire-Ball 225 3:1


SUCTION KITS

	Part Number	Description	Includes		
			Bung Adapter	Bushing Pipe	6 ft Hose
236054	Allows use of Fast-Ball, Mini-Fire-Ball and Fire-Ball universal pumps to work with barrels	188845	101496	109105	


OIL PUMP ACCESSORIES

ORDERING OPTIONS


SUCTION TUBES

	Part Number	Container Size	Type of Mount	Compatible Pumps	Includes		
					Extension Size	Extension	Foot Spacer
	238592	16 gal (60 l)	Cover-mounted	Fast-Ball 100 Mini Fire-Ball 225 3:1 Fire-Ball 300 5:1 Fire-Ball 425 10:1	14-1/2 in	191126	110127
	238593	55 gal (200 l)	Cover-mounted		21-3/4 in	191128	110127
	238595	55 gal (200 l)	Bung-mounted		26 in	191130	110127
	238596	275 gal (1,100 l)	Bung-mounted		36 in	191131	110127


THERMAL RELIEF VALVE KITS

	Part Number	Pressure Rating	Compatible Pumps	Includes			
				Valve	Bung Adapter	Swivel	Hose
	235998	600 psi (41 bar)	Mini Fire-Ball 225 3:1	112174	191075	155494	238370
	237893	900 psi (62 bar)	Fire-Ball 300 5:1	102527	191075	155494	238370
	248296	900 psi (62 bar)	Fire-Ball 300 5:1	102527	-	-	109163
	237601	600 psi (41 bar)	Fire-Ball 425 3:1	112174	191075	155494	238370
	240429	1,600 psi (110 bar)	Fire-Ball 425 6:1 Fire-Ball 425 10:1	102527	191075	155494	238370
	248324	1,600 psi (110 bar)	Fire-Ball 425 6:1 Fire-Ball 425 10:1	113053	-	-	109163

TOOLS FOR WORKING ON FIRE-BALL AIR MOTORS

	Part Number	Description
	207579	Padded pliers
	171818	Poppet gauge
	168085	Insert tool

WALL-MOUNTING BRACKETS

	Part Number	Description	Compatible Pumps
	203987	Clamps onto universal pump tube	Fast-Ball 100 Mini Fire-Ball 225 3:1 Fire-Ball 300 5:1 Fire-Ball 425 10:1
	238245	Mounts directly to pump flange	Fire-Ball 425 3:1, 6:1, 10:1
	236778	Provides mounting to wall surface by flange	Fire-Ball 425 3:1



NXT™ HIGH-FLO® PUMPS

MOVE LARGE AMOUNTS OF OIL FAST

Tested to outperform and outlast all other pumps on the market – with its long-life design and intuitive, easy-to-use controls – the NXT High-Flo pump is the best value for the money. Fewer parts, faster repairs and long-lasting durability.



NXT Air Motor

Modular design for easier maintenance with rugged body armor that won't rust or dent.

Modular Air Valves

Easy-to-repair valve eliminates stalling and contains de-icing controls.

Piston Valve with Floating Piston Seal

For maximum pressure balance over a range of material viscosities.

TYPICAL APPLICATIONS

- Fleet service facilities
- In-plant
- Mining

TYPICAL FLUIDS


- Petroleum- and synthetic-based oils (motor, gear and ATF)

OIL PUMPS AND PACKAGES

NXT HIGH-FLO PUMPS

PUMP PERFORMANCE

NXT 3.5:1 HIGH-FLO PUMPS




Inlet Air Pressures:

- A** = 100 psi (6.9 bar)
- B** = 70 psi (4.8 bar)
- C** = 40 psi (2.8 bar)

TEST FLUID:
No. 10 Weight Oil

NXT 4.5:1 HIGH-FLO PUMPS



Inlet Air Pressures:

- A** = 100 psi (6.9 bar)
- B** = 70 psi (4.8 bar)
- C** = 40 psi (2.8 bar)

TEST FLUID:
No. 10 Weight Oil

TECHNICAL SPECIFICATIONS

Fluid Pressure Ratio	3.5:1	4.5:1
Air Motor Effective Diameter	7.5 in (191 mm)	7.5 in (191 mm)
Maximum Fluid Working Pressure	350 psi (24 bar / 2.4 MPa)	450 psi (31 bar / 3.1 MPa)
Output per Cycle	2,000 cc	1,500 cc
Air Inlet	3/4 in NPT(F)	3/4 in NPT(F)
Fluid Inlet	1-1/2 in NPT(F)	1-1/2 in NPT(F)
Fluid Outlet	1 in NPT(F)	1 in NPT(F)
Air Operation Range	20 psi to 100 psi (1.4 bar to 7 bar)	20 psi to 100 psi (1.4 bar to 7 bar)
Maximum Recommended Pump Speed	60 cpm	60 cpm
Cycles per Gallon (Liter)	1.9 (0.5)	2.5 (0.67)
Wetted Parts	Stainless steel, PTFE, leather, UHMWPE, carbon steel	Stainless steel, PTFE, leather, UHMWPE, carbon steel
Sound Pressure Level	77 dB(A)	77 dB(A)
Sound Power Level	87 dB(A)	87 dB(A)
Approximate Weight	99 lb (44.9 kg)	99 lb (44.9 kg)
Instruction Manual	System – 312862 Pump – 311211 Pump Lower – 311690 Motor – 311238	System – 312862 Pump – 311211 Pump Lower – 311690 Motor – 311238



ORDERING OPTIONS

OIL PUMP PACKAGES

Package Number	24D602	24D603
Ratio	3.5:1	4.5:1
Mounting	255143 (Wall)	255143 (Wall)
Pump with Thermal Relief Kit	24D596	24D597
Output per Cycle	2,000 cc	1,500 cc
Output at 60 CPM	31.7 gpm (120 lpm)	23.8 gpm (90 lpm)
Motor Size	NXT 3400	NXT 3400
Maximum Fluid Pressure	350 psi (24.1 bar)	450 psi (31 bar)
Maximum Air Input Pressure	100 psi (6.9 bar)	100 psi (6.9 bar)
System Manual	312862	312862
Pump Manual	311211	311211
Pump Lower Manual	311690	311690
Motor Manual	311238	311238
Pump Inlet Size	1-1/2 in NPT	1-1/2 in NPT
Pump Outlet Size	1 in NPT	1 in NPT
4 ft x 3/4 in Air Hose	15B554	15B554
6 ft x 1 in Fluid Hose	115042	115042
Instruction Manual	309351	309351

ACCESSORIES

DATATRAK™ CONVERSION KIT

For converting NXT air motors to include the DataTrak module with runaway protection. Refer to manual 311486 for more details.

Part Number	Description
NXT306	Conversion kit for NXT3400 motors.

NXT™ DURA-FLO® PUMPS

MOVE LARGE AMOUNTS OF OIL FAST

Tested to outperform and outlast all other pumps on the market – with its long-life design and intuitive, easy-to-use controls – the NXT Dura-Flo pump is the best value for the money. Fewer parts, faster repairs and long-lasting durability.



Optional DataTrak™ Control

Intuitive, easy-to-use DataTrak control gives you pump diagnostics, material usage tracking and pump runaway protection.

NXT Air Motor

Modular design for easier maintenance with rugged body armor that won't rust or dent.

Modular Air Valves

Easy-to-repair valve eliminates stalling and contains de-icing controls.

Integrated Air Controls

- Easy-turn, lockable regulator is front-mounted for easy access.
- Compact and modular with built-in filtration.

Piston Valve with Floating Piston Seal

For maximum pressure balance over a range of material viscosities.

TYPICAL APPLICATIONS

- Fleet service facilities
- In-plant
- Mining

TYPICAL FLUIDS

- Petroleum- and synthetic-based oils (motor, gear and ATF)




PUMP PERFORMANCE

Inlet Pressures:


- A** = 100 psi (6.9 bar) air pressure or 1500 (103 bar) hydraulic oil pressure
- B** = 70 psi (4.8 bar) air pressure or 1050 (72 bar) hydraulic oil pressure
- C** = 40 psi (2.8 bar) air pressure or 600 (41 bar) hydraulic oil pressure

TEST FLUID: No. 10 Weight Oil


NXT DURA-FLO 6:1 PUMPS

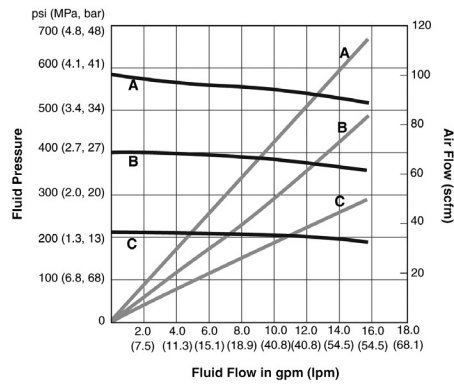


NXT DURA-FLO 10:1 PUMPS

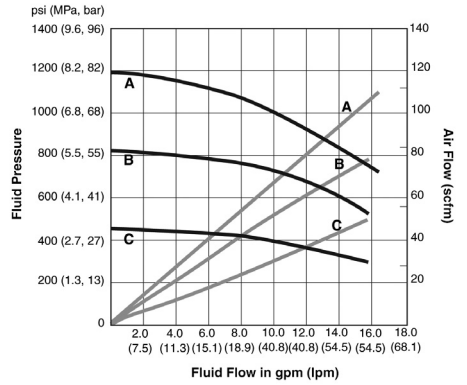

NXT DURA-FLO 12:1 PUMPS

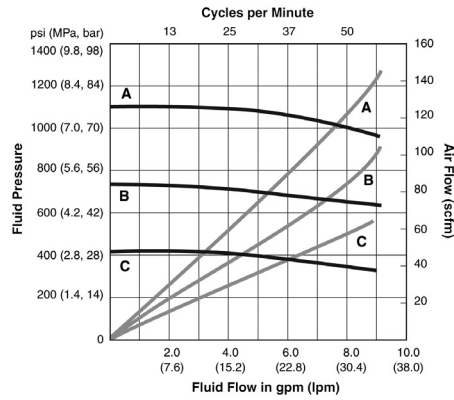

NXT DURA-FLO 23:1 PUMPS

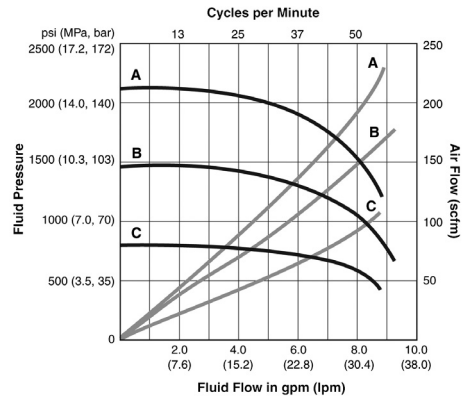

OIL PUMPS AND PACKAGES

NXT™ DURA-FLO® PUMPS

TECHNICAL SPECIFICATIONS

Fluid Pressure Ratio	6:1	10:1	12:1	23:1
Air Motor Effective Diameter	7.5 in (191 mm)	10.375 in (264 mm)	7.5 in (191 mm)	10.375 in (264 mm)
Maximum Fluid Working Pressure	620 psi (43 bar / 4.3 MPa)	1,180 psi (81 bar / 8.1 MPa)	1,190 psi (82 bar / 8.2 MPa)	1,725 psi (119 bar / 11.9 MPa)
Output per Cycle	1,000 cc	1,000 cc	580 cc	580 cc
Air Inlet	3/4 in NPT(F)	3/4 in NPT(F)	3/4 in NPT(F)	3/4 in NPT(F)
Fluid Inlet	2 in NPT(F)	2 in NPT(F)	2 in NPT(F)	2 in NPT(F)
Fluid Outlet	1-1/2 in NPT(F)	1-1/2 in NPT(F)	1-1/2 in NPT(F)	1-1/2 in NPT(F)
Air Operation Range	20 psi to 100 psi (1.4 bar to 7 bar)	20 psi to 100 psi (1.4 bar to 7 bar)	20 psi to 100 psi (1.4 bar to 7 bar)	20 psi to 75 psi (1.4 bar - 5.2 bar)
Maximum Recommended Pump Speed	60 cpm	60 cpm	60 cpm	60 cpm
Cycles per Gallon (Liter)	3.8 (1.0)	3.8 (1.0)	6.5 (1.72)	6.5 (1.72)
Wetted Parts	Stainless steel, CS, chrome, zinc, nickel, Buna-N, tungsten carbide, nylon, UHMWPE, leather, PTFE, PEEK	Stainless steel, CS, chrome, zinc, nickel, Buna-N, tungsten carbide, nylon, UHMWPE, leather, PTFE, PEEK	Stainless steel, CS, chrome, zinc, nickel, tungsten carbide, ductile iron, acetal	Stainless steel, CS, chrome, zinc, nickel, tungsten carbide, ductile iron, acetal
Sound Pressure Level	77 dB(A)	80 dB(A)	77 dB(A)	80 dB(A)
Sound Power Level	87 dB(A)	90 dB(A)	87 dB(A)	90 dB(A)
Approximate Weight	113 lb (51.3 kg)	132 lb (59.9 kg)	92 lb (41.7 kg)	102 lb (46.3 kg)
Instruction Manual	System – 312862 Pump – 311833 Pump Lower – 311717 Motor – 311238	System – 312862 Pump – 311833 Pump Lower – 311717 Motor – 311238	System – 312862 Pump – 311826 Pump Lower – 311825 Motor – 311238	System – 312862 Pump – 311826 Pump Lower – 311825 Motor – 311238



ORDERING OPTIONS

OIL PUMP PACKAGES WITH DATATRAK

Package Number with DataTrak	247890	247894	247891	247895
Ratio	6:1	10:1	12:1	23:1
Mounting	255143 (Wall)	255143 (Wall)	255143 (Wall)	255143 (Wall)
Output per Cycle	1,000 cc	1,000 cc	580 cc	580 cc
Output at 60 CPM	17.4 gpm (65.9 lpm)	17.4 gpm (65.9 lpm)	9.2 gpm (34.8 lpm)	9.2 gpm (34.8 lpm)
Motor Size	NXT 3400	NXT 6500	NXT 3400	NXT 6500
Maximum Fluid Pressure	620 psi (42.7 bar)	1,180 psi (81.3 bar)	1,190 psi (82.1 bar)	1,725 psi (118.9 bar)
Maximum Air Input Pressure	100 psi (6.9 bar)	100 psi (6.9 bar)	100 psi (6.9 bar)	75 psi (5.2 bar)
System Manual	312862	312862	312862	312862
Pump Manual	311833	311833	311826	311826
Pump Lower Manual	311717	311717	311825	311825
Air Motor Manual	311238	311238	311238	311238
Pump Inlet Size	2 in NPT	2 in NPT	2 in NPT	2 in NPT
Pump Outlet Size	1-1/2 in NPT	1-1/2 in NPT	1-1/2 in NPT	1-1/2 in NPT
4 ft x 3/4 in Air Hose	15B554	15B554	15B554	15B554
6 ft x 1 in Fluid Hose	115042	115042	115042	115042
Instruction Manual	312862	312862	312862	312862

OIL PUMP PACKAGES WITHOUT DATATRAK


Package Number without DataTrak	24D604	24D608	24D605
Ratio	6:1	10:1	12:1
Mounting	255143 (Wall)	255143 (Wall)	255143 (Wall)
Pump without DataTrak and Thermal Relief Kit	24D598	24D601	24D599
Output per Cycle	1,000 cc	1,000 cc	580 cc
Output at 60 CPM	17.4 gpm (65.9 lpm)	17.4 gpm (65.9 lpm)	9.2 gpm (34.8 lpm)
Motor Size	NXT 3400	NXT 6500	NXT 3400
Maximum Fluid Pressure	620 psi (42.7 bar)	1,180 psi (81.3 bar)	1,190 psi (82.1 bar)
Maximum Air Input Pressure	100 psi (6.9 bar)	100 psi (6.9 bar)	100 psi (6.9 bar)
System Manual	312862	312862	312862
Pump Manual	311833	311833	311826
Pump Lower Manual	311717	311717	311825
Air Motor Manual	311238	311238	311238
Pump Inlet Size	2 in NPT	2 in NPT	2 in NPT
Pump Outlet Size	1-1/2 in NPT	1-1/2 in NPT	1-1/2 in NPT
4 ft x 3/4 in Air Hose	15B554	15B554	15B554
6 ft x 1 in Fluid Hose	115042	115042	115042
Instruction Manual	312862	312862	312862



DYNA-STAR® HYDRAULIC PUMPS

FIELD-PROVEN, ENERGY-EFFICIENT

Hydraulic Dyna-Star pumps provide reliable, quiet, ice-free performance at maximum pressure and low-flow rates and are up to three times more energy efficient than comparable compressed-air systems.

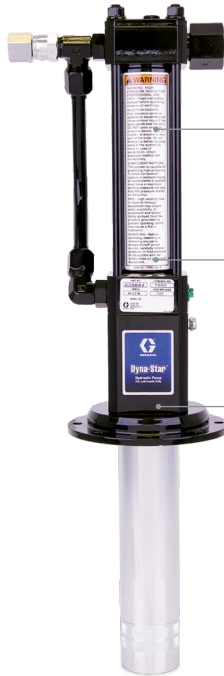

Built-In Reliability

Self-lubricating vertical design for long life and reliable operation in high vibration environments.

Quiet Hydraulic Motor

No need for add-on mufflers.

High-Efficiency Motor

Uses less hydraulic oil.

TYPICAL APPLICATIONS

- Service shops
- Heavy-duty dealerships
- Fleet services facilities
- In-plant
- Lube trucks
- Mining

TYPICAL FLUIDS

- Petroleum- and synthetic-based oils (motor, gear and ATF)

TECHNICAL SPECIFICATIONS

Fluid Pressure Ratio	1:1	1:1	1/4:1	1:1 Stainless Steel
Pump Number	224741	224742	236753	237653
Applications	Oil dispensing	Oil dispensing	Bulk oil transfer	Antifreeze dispensing
Drum Size	Universal	55 gal (200 l) Bung- or cover-mounted	Universal	Universal
Maximum Input Pressure	1,500 psi (102 bar)	1,500 psi (102 bar)	1,500 psi (102 bar)	1,000 psi (70 bar)
Maximum Fluid Input Volume	3 gpm (11.4 lpm)	3 gpm (11.4 lpm)	3 gpm (11.4 lpm)	3 gpm (11.4 lpm)
Maximum Output Flow Rate	3 gpm (11.4 lpm)	3 gpm (11.4 lpm)	10 gpm (37.9 lpm)	3 gpm (11.4 lpm)
Maximum Recommended CPM	60	60	60	60
Maximum Fluid Output Pressure	1,500 psi (102 bar)	1,500 psi (102 bar)	375 psi (25.1 bar)	1,500 psi (102 bar)
Hydraulic Supply Inlet	3/8 in NPT	3/8 in NPT	3/8 in NPT	3/8 in NPT
Hydraulic Return Outlet	3/4 in NPT	3/4 in NPT	3/4 in NPT	3/4 in NPT
Fluid Outlet	1/2 in NPT	1/2 in NPT	1/2 in NPT	1/2 in NPT
Fluid Inlet	1-1/2 in NPT	1-1/2 in NPT	1-1/2 in NPT	3/4 in NPT
Maximum Incoming Fluid Temp.	130°F (54°C)	130°F (54°C)	130°F (54°C)	130°F (54°C)
Wetted Parts	Steel, copper, leather	Steel, copper, leather	Aluminum, steel, nitrile, polyurethane	Steel, copper, leather
Sound Pressure Level	77 dB(A)	77 dB(A)	77 dB(A)	77 dB(A)
Approximate Weight	24 lb (10.9 kg)	24 lb (10.9 kg)	48 lb (21.8 kg)	24 lb (10.9 kg)
Instruction Manual	308155	308155	308390	308155




ORDERING OPTIONS

DYNA-STAR HYDRAULIC PUMPS

Part Number	Description
224741	1:1 Universal oil pump
224742	1:1 Oil pump for 55 gal (400 lb) drum size, bung- or cover- mounted
236753	1/4:1 Universal oil pump
237653	1:1 Universal stainless steel oil pump



ACCESSORIES

DRUM COVERS


	Part Number	Description
	200326	For 55 gal (200 l) drums
	204574	For 16 gal (60 l) drums
	222058	For 5 gal (20 l) pails
	160754	For 5 gal (20 l), 16 gal (60 l) and 55 gal (200 l) bung-mounted pumps

HYDRAULIC FLUID CONTROLS

Required for each pump.

	Part Number	Description
	236864	Dyna-Star fluid controls [1,500 psi (102 bar); 3 gpm (11.4 lpm)]. Includes manifold with pressure-reducing valve, flow-control valve, pressure gauge, shut-off ball valves, and 3 ft (0.9 m) supply and return hoses. Instruction manual 308395.
	237904	1:1 Dyna-Star thermal relief valve, 1,600 psi (110 bar)


WALL-MOUNTING BRACKETS

	Part Number	Description
	203987	For stubby/universal 1:1 Dyna-Star pump
	236778	For stubby/universal 1/4:1 Dyna-Star pump

POWER-STAR™ HYDRAULIC PUMPS

FIELD-PROVEN, ENERGY-EFFICIENT

Hydraulic Power-Star pumps provide reliable, quiet, ice-free performance at maximum pressure and low-flow rates and are up to three times more energy efficient than comparable compressed-air systems.

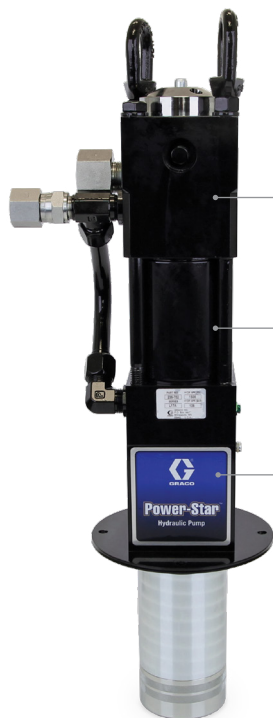

Built-In Reliability

Self-lubricating vertical design for long life and reliable operation in high vibration environments.

Quiet Hydraulic Motor

No need for add-on mufflers.

High-Efficiency Motor

Uses less hydraulic oil.

TYPICAL APPLICATIONS

- Service shops
- Heavy-duty dealerships
- Fleet services facilities
- In-plant
- Lube trucks
- Mining

TYPICAL FLUIDS

- Petroleum- and synthetic-based oils (motor, gear and ATF)

TECHNICAL SPECIFICATIONS

Fluid Pressure Ratio	1:1
Pump Number	236754
Applications	Bulk oil transfer
Drum Size	Universal
Maximum Input Pressure	1,500 psi (102 bar)
Maximum Fluid Input Volume	12 gpm (45.4 lpm)
Maximum Output Flow Rate	12 gpm (45.4 lpm)
Maximum Recommended CPM	60
Maximum Fluid Output Pressure	1,500 psi (102 bar)
Hydraulic Supply Inlet	3/4 in NPT
Hydraulic Return Outlet	1-1/4 in NPT
Fluid Outlet	1/2 in NPT
Fluid Inlet	1-1/2 in NPT
Maximum Incoming Fluid Temp.	130°F (54°C)
Wetted Parts	Iron, steel, stainless steel, nitrile, polyurethane
Sound Pressure Level	78 dB(A)
Approximate Weight	100 lb (45.4 kg)
Instruction Manual	308391




ORDERING OPTIONS

POWER-STAR HYDRAULIC PUMPS

Part Number	Description
236754	1:1 Universal oil pump


ACCESSORIES

DRUM COVERS


	Part Number	Description
	200326	For 55 gal (200 l) drums
	204574	For 16 gal (60 l) drums
	222058	For 5 gal (20 l) pails
	160754	For 5 gal (20 l), 16 gal (60 l) and 55 gal (200 l) bung-mounted pumps

HYDRAULIC FLUID CONTROLS

Required for each pump.

	Part Number	Description
	236865	Power-Star fluid controls [1,500 psi (102 bar); 12 gpm (45.4 lpm)]. Includes manifold with pressure-reducing valve, flow-control valve, pressure gauge, shut-off ball valves, and 3 ft (0.9 m) supply and return hoses. Instruction manual 308395.

WALL-MOUNTING BRACKET

	Part Number	Description
	236778	For stubby/universal 1/4:1 Power-Star pump

MANUALLY OPERATED PUMPS

ORDERING OPTIONS

16 GALLON (60 L) METERED AND NON-METERED DISPENSING PACKAGES

Designed for manual dispensing of fluid oil from bulk containers to point of application.



Package Number	225880	225376	225384	225380	225378*
Fluids Handled	ATF	Gear lube	Gear lube	Gear lube	Gear lube
Package Type	Portable	Portable	Portable	Stationary	Portable
Pump Part Number	204867	204867	204867	204867	204867
Meter Dispense Kit	239707	239705	239705	-	-
Dispense Kit	-	-	-	214658	214658
Fluid Hose	-	-	6 ft x 1/2 in	6 ft x 1/2 in	6 ft x 1/2 in
Drum Cover	204574	204574	204574	204574	204574
Portable Base	203622	203622	-	-	203622
Cart	-	-	203650	-	-
Instruction Manual	306436	306436	306436	306436	306436

*Hydraulic; can be used for gear oil dispensing.



ORDERING OPTIONS

PAIL-DISPENSING PACKAGE FOR 5 GAL (20 L) PAILS

Mounts on top of standard 5 gal (20 l) pail (pail not included).
 Dispenses 1.6 oz to 1.9 oz. (47.3 ml to 56.2 ml) per stroke.



Package Number	226289
Fluids Handled	Gear lube
Fluid Hose	4 ft (1.2 m)
Instruction Manual	306875

PUMPING BULK LUBRICANTS FROM 16 GAL (60 L) OR 55 GAL (200 L) DRUMS*

All pumps come with suction tube and bung adapter.



Package Number	114829	226290
Type of Pump	Lever ⁽¹⁾	Rotary ⁽²⁾
Fluids Handled	Petroleum-based products, antifreeze	Petroleum-based products
Delivery Rate	0.1 gal (0.4 l) per downstroke	1 gal (3.7 l) per 18 cycles
Fluid Hose	-	-
Instruction Manual	-	306876

*Drums not included.

¹ Telescopic suction tube mounts 2 in NPT bung opening of 16 gal (60 l) or 55 gal (200 l) drum. Package includes bung adapter and spout outlet.

² Package has adjustable 2 in NPT bung mounting to allow use with either 16 gal (60 l) or 55 gal (200 l) drum. Package includes bung adapter and spout outlet.

OIL DISPENSE METERS



	Page
Graco Dispense Meters	90
LDP5 Electronic Preset Meters	91-93
EM Series® Electronic Meters	94-96
PM Series® Electronic Meters	97-99
SD Series™ Electronic Meters	100-102
IM20 In-Line Electronic Meter	103
IM20P In-Line Electronic Meter	104
SDI15 In-Line Electronic Meter	105
Mechanical Meters	106-108
SDV15 Control Valve	109-110
XDV20 Control Valve	111-112
Dispense Consoles	113-114

DISPENSE METERS

OIL DISPENSE METERS AND CONTROL VALVES

	Fluid	Manual/ Preset	Maximum Working Pressure	Maximum Flow Rate	Intended Use	Warranty	Reference Pages
LDP5 Electronic Preset Meters 	<ul style="list-style-type: none"> Petroleum- and synthetic-based oils (motor, gear and ATF) Antifreeze 	Preset	1,000 psi (69 bar)	5 gpm (19 lpm)	Indoor	5 years overall (2 years electronics)	91-93
EM Series Electronic Meters 	<ul style="list-style-type: none"> Petroleum- and synthetic-based oils (motor, gear and ATF) Antifreeze 	Manual	1,500 psi (103.4 bar)	20 gpm (76 lpm)	Indoor/ Outdoor	5 years overall (3 years electronics)	94-96
PM Series Electronic Meters 	<ul style="list-style-type: none"> Petroleum- and synthetic-based oils (motor, gear and ATF) Antifreeze 	Preset	1,500 psi (103.4 bar)	20 gpm (76 lpm)	Indoor/ Outdoor	5 years overall (3 years electronics)	97-99
SD Series Electronic Meters 	<ul style="list-style-type: none"> Petroleum- and synthetic-based oils (motor, gear and ATF) Antifreeze 	Manual/ Preset	1,500 psi (103.4 bar)	14 gpm (53 lpm)	Indoor/ Limited Outdoor	7 years overall (3 years electronics)	100-102
IM20 In-Line Meters 	<ul style="list-style-type: none"> Petroleum- and synthetic-based oils (motor, gear and ATF) Antifreeze 	In-Line	1,500 psi (103.4 bar)	20 gpm (76 lpm)	Indoor/ Outdoor	5 years overall (3 years electronics)	103
IM20P In-Line Meter 	<ul style="list-style-type: none"> Petroleum- and synthetic-based oils (motor, gear and ATF) Antifreeze 	In-Line	1,500 psi (103.4 bar)	20 gpm (76 lpm)	Indoor/ Outdoor	1 year	104
SDI15 In-Line Meters 	<ul style="list-style-type: none"> Petroleum- and synthetic-based oils (motor, gear and ATF) Antifreeze Diesel exhaust fluid 	In-Line	1,500 psi (103.4 bar)	15 gpm (56.8 lpm)	Indoor	7 years overall (3 years electronics)	105
Mechanical Meters 	<ul style="list-style-type: none"> Petroleum- and synthetic-based oils (motor, gear and ATF) Antifreeze 	Manual/ Preset	1,500 psi (103.4 bar)	8 gpm (30 lpm)	Indoor/ Outdoor	5 years	106-108
SDV15 Control Valves 	<ul style="list-style-type: none"> Petroleum- and synthetic-based oils (motor, gear and ATF) Antifreeze 	N/A	1,500 psi (103.4 bar)	15 gpm (56.8 lpm)	Indoor/ Outdoor	7 years	109-110
XDV20 Control Valves 	<ul style="list-style-type: none"> Petroleum- and synthetic-based oils (motor, gear and ATF) Antifreeze 	N/A	1,500 psi (103.4 bar)	20 gpm (76 lpm)	Indoor/ Outdoor	7 years	111-112



LDP5 ELECTRONIC PRESET METERS

PERFECT FOR LOWER-VOLUME SERVICE APPLICATIONS

For use in small service shops, fast lubes and low-volume in-plant applications.

Easy-to-Read LCD Screen

Keeps dispenses precise.

Fluid Extension Kits

Choose from rigid or flexible extensions with automatic thermal compensating nozzle.

Operator Controls

Displays in quarts, pint, gallons or liters. Durable switches for long life.

Rugged Meter Body


Superior impact resistance and long life.

Comfortable Handle

Ergonomically designed for operator comfort. Two-finger trigger with latching on preset models.

Fluid Swivel

1/2 inch fluid inlet.

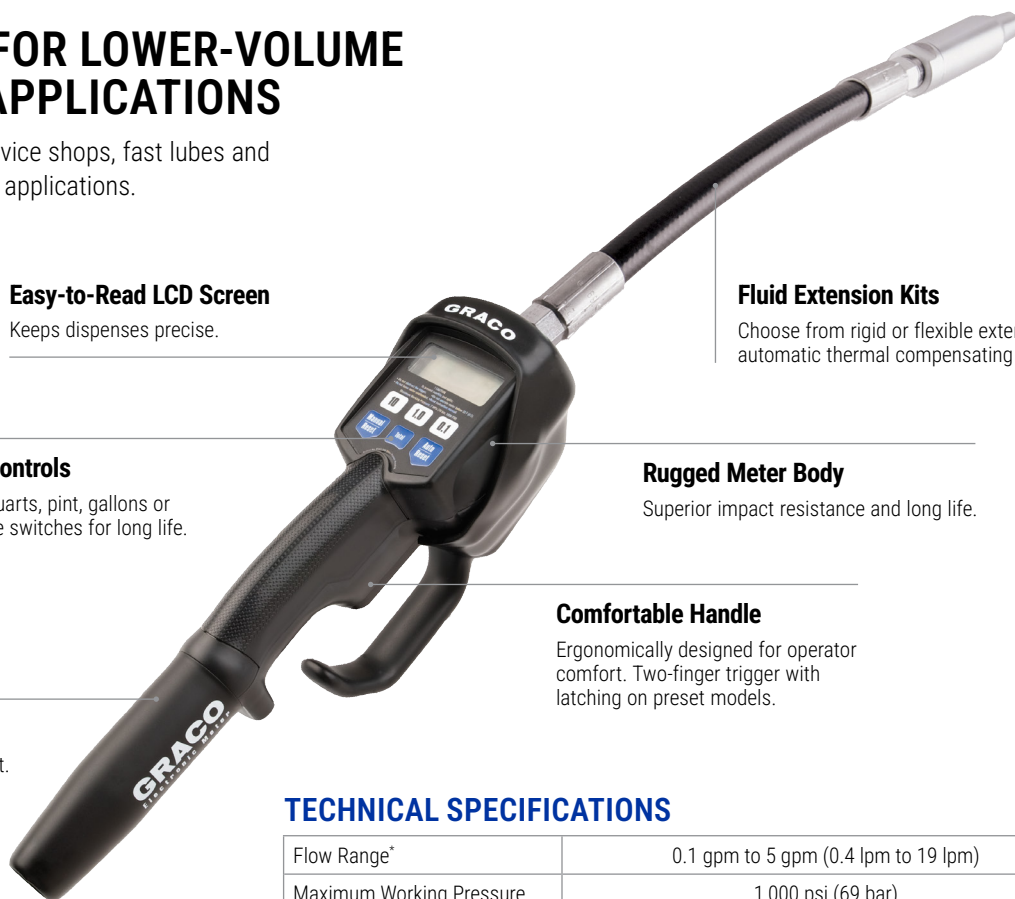

TYPICAL APPLICATIONS

- Automotive dealerships
- Fast lube centers
- Service shops
- Fleet services facilities
- In-plant

TYPICAL FLUIDS

- Petroleum- and synthetic-based oils (motor, gear and ATF)
- Antifreeze

TECHNICAL SPECIFICATIONS

Flow Range*	0.1 gpm to 5 gpm (0.4 lpm to 19 lpm)
Maximum Working Pressure	1,000 psi (69 bar)
Units of Measure	Quarts, pints, gallons, liters (factory set to quarts)
Accuracy**	+/- 0.5%
Inlet	1/2 in NPT
Outlet	1/2 in NPT
Maximum Totalizer	999,999 gallons or liters
Maximum Recorded Dispense	999.9 units
Maximum Preset Volume	999.9 units (LDP5 only)
Operating Temperature Range	32°F to 120°F (0°C to 48.8°C)
Storage Temperature Range	-30°F to 120°F (-34.4°C to 48.8°C)
Outdoor Use	No
Battery	9 volt alkaline
Battery Life	One year
Wetted Parts	SST, nitrile rubber, zinc, CS, LCP
Meter Pressure Loss*	90 psi (6.2 bar) @ 5 gpm (19 lpm)
Dimensions (without extension)	11 in L x 3.25 in W x 3.25 H (28 cm L x 8.3 cm W x 8.3 cm H)
Weight	3 lb (1.36 kg)
Warranty	Five years overall, two years electronics
Instruction Manual	312668

*Tested in 10W oil at 70°F. Flow rates vary with fluid pressure, temperature, viscosity, inlet and nozzle type.




**At 2.5 gpm (9.5 lpm) @ 70°F (21°C) with 10 wt. oil and 1 gal (3.8 l) dispensed. May require recalibration. Out-of-box accuracy ±1.25%. Not recommended for in-line installation.

LDP5 ELECTRONIC PRESET METERS







ORDERING OPTIONS

LDP5 ELECTRONIC PRESET METERS

Automatic nozzle included

	Extension	Inlet in (mm)	Part Number	Package Includes	
				Trigger Guard	Swivel Cover
	Flexible	1/2 (13)	258694	Yes	Yes
	Rigid		256216	Yes	Yes
	Flexible		255277	No	No

NOZZLE EXTENSION KITS



	Extension	Fluid	Nozzle Description	Part Number
	Rigid	Oil/Antifreeze	Automatic, thermally compensating	239949
		Gear lube	Automatic, thermally compensating	239950
		Gear lube	Automatic	238887
	Flexible	Oil/Antifreeze	Automatic, thermally compensating	239951
	Nozzle Only	Oil/Antifreeze/Gear lube	Automatic, thermally compensating	239829
		Oil/Antifreeze/Gear lube	Automatic	238371

OIL DISPENSE METERS AND CONTROL VALVES






ORDERING OPTIONS






EM5/PM5 TO LD SERIES UPGRADE KITS

	Part Number	Description
	257350	EM5 to LDM5
	257351	PM5 to LDP5

ACCESSORIES

	Part Number	Description
	240416	Inlet swivel
	114017	Inlet filter, 80 mesh
	240453	Valve repair kit

PROTECTIVE BOOTS WITH TRIGGER GUARDS

	Part Number	Description
	247759	Black
	243835	Red
	243836	Blue
	243837	Green
	247760	Yellow

SWIVEL COVERS

	Part Number	Description
	191294	Black
	191287	Red
	191288	Blue
	191295	Yellow

EM[®] SERIES ELECTRONIC MANUAL DISPENSE METERS

LOW-FLOW AND HIGH-FLOW MANUAL METERS

Building on the heritage of Graco's first electronic meter, the EM Series features a robust design at an affordable price. Our legacy valve handle features a long-life valve design for years of dependable service. These meters are weather-rated and impact-resistant to withstand the harshest shop conditions.

Twist-Close Nozzle Prevents Leaking

Multiple extensions available including rigid, flexible and gear lube.

Proven in Harsh Conditions

Sealed electronics (IP69K) are protected against direct pressure washing and dust.

High-Flow Rates

Capable of up to 20 gpm.

Long Battery Life

Features upgraded electronics and easily replaceable AAA batteries.

Prevent Accidental Dispenses

Easy-to-hold locking handle.

Legacy Valve

1/2 and 3/4 inch inlets, compatible with oil, ATF, antifreeze and gear lube.



TYPICAL APPLICATIONS

- Automotive dealerships
- Service and fast lube centers
- Lube trucks
- Mining
- Heavy-duty dealerships
- Fleet service facilities
- In-plant

TYPICAL FLUIDS

- Petroleum- and synthetic-based oils (motor, gear and ATF)
- Antifreeze






TECHNICAL SPECIFICATIONS

	EM8	EM20
Flow Range	0.25 to 8 gpm (0.95 to 30.3 lpm)	0.25 to 20 gpm (0.95 to 75.7 lpm)
Maximum Operating Pressure	1,500 psi (102 bar)	
Unit of Measure	Quarts, gallons, pints, liters	
Accuracy/Repeatability	±0.5%	
Inlet	1/2 NPT	1/2 NPT or 3/4 NPT
Outlet	3/4 straight thread O-ring boss	7/8 straight thread O-ring boss
Maximum Totalizer	19,999 units	
Maximum Recorded Dispense	19,999 units	
Operating Temperature Range	-22°F to 180°F (-30°C to 82°C)	
Storage Temperature Range	-40°F to 185°F (-40°C to 85°C)	
Outdoor Use	Yes – IP69k as per DIN 40050-9	
Battery	2 (AAA) alkaline or 2 (AAA) lithium	
Wetted Parts	Aluminum, stainless steel, carbon steel, acetal, nitrile rubber, Geolast™	
Meter Pressure Loss*	30 psi @ 6 gpm	85 psi @ 12 gpm
Dimensions (L x W x H)	13 in x 3.5 in x 5.25 in (33 cm x 9 cm x 13.3 cm)	
Weight	3 lbs (1.36 kg)	3.1 lbs (1.39 kg)
Warranty	Five years overall, three years electronics and 1 year wear parts	
Instruction Manual	3A5588	

*Tested in 10W oil at 70°F (21°C). Flow rate varies with fluid pressure, temperature, viscosity, inlet fitting size and nozzle type. Geolast is a registered trademark of Advanced Elastomer Systems.



ORDERING OPTIONS








		Extension	Inlet in (mm)	Nozzle Type	Part Number
EM8		Flexible	1/2 (13)	Non-drip, manual open/close	25C904
				Automatic, non-drip, quick-close	26C526
		Rigid		Non-drip, manual open/close	25C903
				Automatic, non-drip, quick-close	26C525
		Gear		Non-drip, quick-close	25C905
EM20		Flexible	1/2 (13)	High-flow, non-drip, quick-close	25C915
			3/4 (19)		25C918
		Rigid	1/2 (13)	High-flow, non-drip, quick-close	25C916
			3/4 (19)		25C919

		Inlet in (mm)	Part Number
EM8		1/2 (13)	25D433
EM20		1/2 (13)	25D436
		3/4 (19)	25D437

EM[®] SERIES ELECTRONIC MANUAL DISPENSE METERS

ORDERING OPTIONS

NOZZLE AND EXTENSION KITS

	Extension	Fluid	Nozzle Description	Part Number	Compatible Meters
	Rigid	Oil	Non-drip, manual open/close	26C267	EM8
			Automatic, non-drip, quick-close	255852	EM8
			Non-drip, quick-close	255921	EM20
	Rigid	Gear lube	Non-drip, quick-close	255854	EM8
	Flexible	Oil	Non-drip, manual open/close	26C268	EM8
			Automatic, non-drip, quick-close	255853	EM8
			Non-drip, quick-close	255859	EM20
	Nozzle Only	Oil/Antifreeze	Non-drip, manual open/close	17T207	EM8
	Nozzle Only	Oil/Antifreeze	Non-drip, quick-close	255793	EM20
	Nozzle Only	Gear lube	Non-drip, quick-close	255470	EM8
	Flexible	Oil/Antifreeze	Extension only, 2 ft length	131733	EM8

ACCESSORIES

Part Number	Description
25D934	Electronic control replacement
129876	Black impact guard for EM8 or EM20
25D936	Battery kit: includes AAA batteries, Torx screws and bezel seal
100896	3/4 NPT(M) x 1/2 NPT(F) adapter

PM™ SERIES ELECTRONIC PRESET DISPENSE METERS



HEAVY-DUTY PRESET METERS FOR THE TOUGHEST JOBS

Use Graco's PM8 and PM20 electronic preset meters to dispense fluids quickly, reliably and accurately to vehicles, trucks, yellow iron machines and more in the most challenging, extreme environments. Designed with high-quality robust materials to protect key components, these powerful meters can take a beating without fail for optimal productivity.

Proven in Harsh Conditions

Sealed electronics (IP69K) are protected against direct pressure washing and dust.

Twist-Close Nozzle Prevents Leaking

Multiple extensions available including rigid, flexible and gear lube.

Long Battery Life

Features four easily-replaceable AA batteries.

Long-Life Valve Design

Poppet design offers exceptional valve life for heavy-usage applications.

High Flow Rates

Capable of up to 20 gpm (75.7 lpm).

Easy Valve Operation

Ergonomic four-finger trigger for user comfort protected by a robust full-length trigger guard.

Durable Cast Body

Designed for heavy-duty and harsh applications.



OIL DISPENSE METERS AND CONTROL VALVES

TYPICAL APPLICATIONS

- Lube trucks
- Mining
- Heavy-duty dealerships
- Fleet service facilities
- Automotive dealerships
- Service and fast lube centers
- In-plant

TYPICAL FLUIDS

- Petroleum- and synthetic-based oils (motor, gear and ATF)
- Antifreeze/coolant





TECHNICAL SPECIFICATIONS

	PM8	PM20
Flow Range	0.25 to 8 gpm (0.95 to 30.3 lpm)	0.25 to 20 gpm (0.95 to 75.7 lpm)
Maximum Operating Pressure	1,500 psi (102 bar)	
Unit of Measure	Quarts, gallons, pints, liters	
Accuracy/Repeatability	±0.5%	
Inlet	1/2 NPT	1/2 NPT or 3/4 NPT
Outlet	3/4 straight thread O-ring boss	
Maximum Dispense	19,999.9 units	
Maximum Preset Dispense	19,999 units	
Operating Temperature Range*	-20°F to 125°F (-29°C to 52°C)	
Storage Temperature Range	-40°F to 185°F (-40°C to 85°C)	
Outdoor Use	Yes – IP69K as per IEC 60529	
Battery	4 (AA) alkaline or 4 (AA) lithium	
Wetted Parts	Aluminum, stainless steel, carbon steel, acetal, nitrile rubber, Geolast™	
Meter Pressure Loss**	60 psi @ 6 gpm	150 psi @ 12 gpm
Dimensions (L x W x H)	14.25 in x 4.1 in x 7.2 in (36.2 cm x 10.4 cm x 18.3 cm)	
Weight	5.2 lbs (2.4 kg)	
Warranty	Five years overall, three years electronics and 1 year wear parts	
Instruction Manual	3A8307	

*Lithium ion batteries are required if operating below 0°F (-18°C). **Tested in 10W oil at 70°F (21°C). Flow rate varies with fluid pressure, temperature, viscosity, inlet fitting size and nozzle type. Geolast is a registered trademark of Advanced Elastomer Systems.

PM™ SERIES ELECTRONIC PRESET DISPENSE METERS

ORDERING OPTIONS








		Fluid	Extension	Flow Range gpm (lpm)	Inlet in (mm)	Part Number	
PM8		Oil	Flexible	0.25-8 (1-30)	1/2 (13)	273157	
		Antifreeze				25U086	
		Oil	Rigid			273156	
		Antifreeze				25U085	
		Gear Lube	Rigid			0.25-5 (1-19)	273158
	PM20		Oil			Flexible	0.25-20 (1-76)
3/4 (19)				273168			
Rigid		1/2 (13)		273165			
		3/4 (19)		273167			

OIL DISPENSE METERS AND CONTROL VALVES



ORDERING OPTIONS

NOZZLE AND EXTENSION KITS

	Extension	Fluid	Nozzle Description	Part Number	Compatible Meters
	Rigid	Oil	Non-drip, manual open/close	26C267	PM8
			Automatic, non-drip, quick-close	255852	PM8
			Non-drip, quick-close	255857	PM20
	Rigid	Gear lube	Non-drip, quick-close	255854	PM8
	Flexible	Oil	Non-drip, manual open/close	26C268	PM8
			Automatic, non-drip, quick-close	255853	PM8
			Non-drip, quick-close	255858	PM20
	Nozzle Only	Oil/Antifreeze	Non-drip, manual open/close	17T207	PM8
	Nozzle Only	Oil/Antifreeze	Non-drip, quick-close	255461	PM20
	Nozzle Only	Gear lube	Non-drip, quick-close	255470	PM8
	Flexible	Oil/Antifreeze	Extension only, 2 ft length	131733	PM8

OIL DISPENSE METERS AND CONTROL VALVES

ACCESSORIES

Part Number	Description
18F169	Electronic control replacement
273181	Black impact guard for PM8 or PM20
25D906	Replacement inlet screen for oil/gear lube
25U000	Replacement inlet screen for antifreeze
18F174	Valve replacement for oil/gear lube
18F175	Valve replacement for antifreeze
18F170	Replacement gasket seals for electronics

SD SERIES™ ELECTRONIC METERS

PREMIUM QUALITY AND PERFORMANCE WITH ERGONOMIC DESIGN

Graco's premium SD meters were designed from the ground up to provide the best user experience. These robust meters feature high flow, improved ergonomics and a large high-contrast LCD screen to make viewing dispense amounts easy in all lighting conditions.

Large LCD High-Contrast Display

- High-contrast screen for reading in all lighting conditions with easy setup and navigation.
- See what fluid the meter is setup for and exactly how much you are dispensing.

Available in Two Models


- Manual or preset options.
- Preset is compatible with Pulse™ FC and upgradeable to Pulse™ Pro.

High Flow

Available in two models – 8 gpm (30 lpm) or 18 gpm (68 lpm).

Durable Cast Body

Designed for heavy duty and harsh applications.

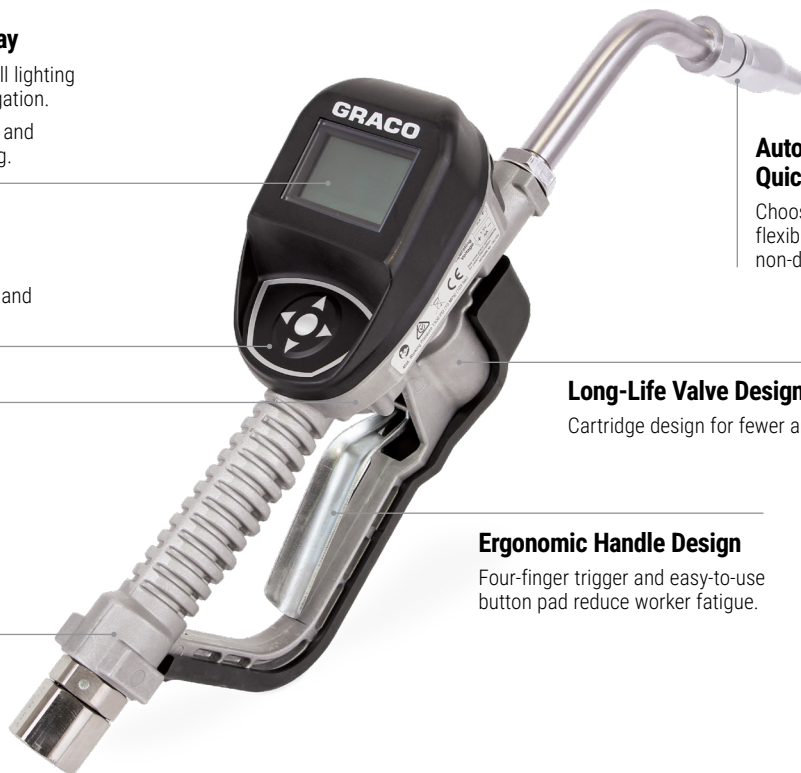

Automatic Quick-Close Nozzle

Choose from rigid or flexible extensions with non-drip performance.

Long-Life Valve Design

Cartridge design for fewer and easier repairs.

Ergonomic Handle Design

Four-finger trigger and easy-to-use button pad reduce worker fatigue.

TYPICAL APPLICATIONS

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- In-plant
- Mining

TYPICAL FLUIDS

- Petroleum- and synthetic-based oils (motor gear, and ATF)
- Antifreeze
- Windshield wash

TECHNICAL SPECIFICATIONS

Flow Range*	0.25 gpm to 18 gpm (0.9 lpm to 68 lpm)
Maximum Working Pressure	1,500 psi (103.4 bar)
Units of Measure	Pints, quarts, gallons, liters (factory set to quarts)
Metered Dispense Valve Accuracy**	+/- 0.5%
Inlet	1/2 in-14 NPT or 3/4 in-14 NPT
Outlet	3/4 in-16 straight thread O-ring Boss
Maximum Recorded Dispense	9999 units (factory set in quarts)
Operating Temperature Range	4°F to 158°F (-20°C to 70°C)
Storage Temperature Range	-40°F to 158°F (-40°C to 70°C)
Battery Life***	6 months
Wetted Parts	Aluminum, stainless steel, PBT, nitrile rubber, zinc-plated carbon steel, nickel plated carbon steel
Dimensions (without extension) – L x W x H	13 in x 3.75 in x 5.75 in (33 cm x 9.5 cm x 14.6 cm)
Weight	5.3 lb (2.4 kg)
Warranty	Five years overall, three years electronics
Instruction Manual	3A6711 and 3A6673

*Tested in 10W motor oil. Flow rates vary with fluid pressure, temperature and viscosity.

**At 2.5 gpm (9.5 lpm), at 70°F (21°C), with 10-weight oil and 1 gallon dispensed. May require calibration.

***Battery required to meet life expectancy: Energizer® Alkaline E91.



ORDERING OPTIONS SD ELECTRONIC METERS



	Dispense Type	Flow Range gpm (lpm)	Fluid	Extension	Inlet in (NPT)	Part Number
SDP8	Preset (Pulse FC-enabled)	0.25-8 (1-30)	Oil	Rigid	1/2	26C384
				Flexible	1/2	26C354
			Antifreeze	Rigid	1/2	26C385
				Flexible	1/2	26C355
			Gear lube	Rigid	1/2	26C358
SDP18	Preset (Pulse FC-enabled)	0.25-18 (1-68)	Oil	Flexible	1/2	26C357
				Flexible	3/4	26C361
				Rigid	3/4	26C360
				Rigid	1/2	26C356
SDM8	Manual	0.25-8 (1-30)	Oil	Flexible	1/2	25M406
				Rigid	1/2	25M404
			Antifreeze	Flexible	1/2	25M407
				Rigid	1/2	25M405
			Gear Lube	Rigid	1/2	25M413
Windshield Wash	Rigid	1/2	25M415			
SDM18	Manual	0.25-18 (1-68)	Oil	Flexible	3/4	25M417
				Rigid	3/4	25M416
				Flexible	1/2	25M411
				Rigid	1/2	25M410


NOZZLE AND EXTENSION KITS

	Extension	Fluid	Nozzle Description	Part Number	Compatible Meters
	Rigid	Oil	Automatic, non-drip, quick-close	255852	SDM8/SDP8
		Antifreeze	Non-drip, manual open/close	26C267	SDM8/SDP8
		Oil/Antifreeze	High-flow, non-drip, quick-close	255857	SDM18/SDP18
	Rigid	Gear lube	Non-drip, quick-close	255854	SDM8/SDP8
	Flexible	Oil	Automatic, non-drip, quick-close	255853	SDM8/SDP8
		Antifreeze	Non-drip, manual open/close	26C268	SDM8/SDP8
		Oil/Antifreeze	High-flow, non-drip, quick-close	255858	SDM18/SDP18
	Nozzle Only	Oil	Automatic, non-drip, quick-close	17R220	SDM8/SDP8
	Nozzle Only	Gear lube	Non-drip, quick-close	255470	SDM8/SDP8
	Nozzle Only	Oil/Antifreeze	Non-drip, manual open/close	17T207	SDM8/SDP8
	Flexible	Oil/Antifreeze	Extension only, 2 ft length	131733	SDM8/SDP8
	Rigid	Windshield wash	Extension, nozzle	273079	SDM8






SD SERIES™ ELECTRONIC METERS

ORDERING OPTIONS


FILTER KITS FOR SD SERIES METERS

	Part Number	Description
	255885	Kit includes filters/strainers, spacers and O-rings

SWIVEL COVERS

	Part Number	Description
	15T366	Black
	Part Number	Description
	15T367	Red
	Part Number	Description
	15T368	Blue
	Part Number	Description
	15T369	Green
	Part Number	Description
	15T370	Yellow

IMPACT PROTECTION

	Part Number	Description
	131226	Pulse/SD meter boot

OIL DISPENSE METERS AND CONTROL VALVES



IM20[®] ELECTRONIC IN-LINE METER

HIGH-FLOW IN-LINE METER

Graco's IM20 in-line meter is weather-rated and shock-resistant, protecting the electronics from intense, high-pressure cleaning and mechanical vibration common in industrial applications.

Easy-to-Read LCD

Simple operator control. Measures in quarts, gallons, pints and liters.

Easy Battery Replacement

Long-lasting, replaceable AAA batteries.



Sealed Electronics

IP69K-rated meter. Electronics are safe from pressure washing and dusty environments.

Tracks Totals in Two Modes

Reset total for a periodic dispense history and non-reset total for the meter's total dispense history.

TYPICAL APPLICATIONS

- Automotive dealerships
- Service and fast lube centers
- Lube trucks
- Mining
- Heavy-duty dealerships
- Fleet service facilities
- In-plant

TYPICAL FLUIDS

- Petroleum- and synthetic-based oils (motor, gear and ATF)
- Antifreeze

TECHNICAL SPECIFICATIONS

Flow Range*	0.25 to 20 gpm (0.95 to 75.7 lpm)
Maximum Working Pressure	1,500 psi (102 bar)
Unit of Measure	Quarts, pints, gallons, liters (factory set to quarts)
Accuracy/Repeatability	±0.5%
Inlet/Outlet	3/4 NPT
Maximum Totalizer	19,999 units
Maximum Recorded Dispense	19,999 units
Operating Temperature Range	-22°F to 180°F (-30°C to 82°C)
Storage Temperature Range	-40°F to 185°F (-40°C to 85°C)
Outdoor Use	Yes – IP69k as per DIN 40050-9
Battery	2 (AAA) alkaline or (2) AAA lithium
Wetted Parts	Aluminum, stainless steel, carbon steel, acetal, nitrile rubber, Geolast™
Meter Pressure Loss*	35 psi @ 12 gpm
Dimensions (L x W x H)	4.2 in x 3.4 in x 3.2 in (10.7 cm x 8. cm x 8.1 cm)
Weight	1 lb. 4 oz. (0.57 kg)
Warranty	Five years overall, three years electronics
Instruction Manual	3A5588

*Tested in 10W oil at 70°F (21°C). Flow rate varies with fluid pressure, temperature, viscosity, inlet fitting size and nozzle type. Geolast is a registered trademark of Advanced Elastomer Systems.

ORDERING OPTIONS

Part Number	Description
25C841	IM20 high-flow, high-pressure in-line meter

OIL DISPENSE METERS AND CONTROL VALVES

IM20P® IN-LINE METERS

ROBUST ELECTRIC IN-LINE METER FOR WIRED INDOOR AND OUTDOOR APPLICATIONS

The IM20P wired electronic meter delivers precise in-line dispenses for in-plant, industrial and other applications. Its heavy-duty aluminum exterior and sealed electronics protect against corrosion inside or outside the plant. Designed and manufactured by a proven leader in meter technology, it's capable of flow rates up to 20 gpm (75.7 lpm) for optimal performance.

High Flow

Flow rates up to 20 gpm (75.7 lpm) for faster dispense.

Rugged Aluminum Body

Remains corrosion free in harsh environments for years of trouble-free service.

Large Inlet and Outlet Porting

Minimal pressure drop to increase production.



Sealed Electronics

Meters are suitable for indoor or outdoor use. IP69K rated.

Wired Convenience

Easily integrated with PLC (programmable logic controller).

TYPICAL APPLICATIONS

- Heavy-duty mobile service trucks
- Mining
- In-plant

TYPICAL FLUIDS

- Petroleum- and synthetic-based oils (motor, gear and ATF)
- Antifreeze/coolant

ORDERING OPTIONS

Part Number	Description
133480	IM20P high-flow, high-pressure in-line pulser meter

TECHNICAL SPECIFICATIONS

Flow Range*	0.25 gpm to 20 gpm (0.95 lpm to 75.7 lpm)
Maximum Working Pressure	1,500 psi (10 MPa, 102 bar)
Units of Measure	User-defined based on pulse output
Accuracy	+/- 0.5%
Inlet/Outlet	3/4 in NPT
Operating Temperature Range	-22°F to 180°F (-30°C to 82°C)
Storage Temperature Range	-40°F to 185°F (-40°C to 85°C)
Outdoor Use	Yes – IP69K as per DIN 40050-9
Operating Voltage	12–24 VDC
Operating Current	26–51 mA
Wire Connection	2-wire (18 ga) PNP or NPN
Wetted Parts	Aluminum, acetal, nitrile, rubber
Meter Pressure Loss*	35 psi (2.41 bar) @ 12 gpm (45.4 lpm)
Dimensions (L x W x H)	5.8 in x 3.4 in x 2.9 in (14.7 cm x 8.6 cm x 7.4 cm)
Weight	1.3 lb (0.59 kg)
Warranty	One year
Instruction Manual	3A8625

*Tested in 10W oil at 70°F. Flow rate varies with fluid pressure, temperature, viscosity, inlet fitting size and nozzle type.



SDI15 IN-LINE ELECTRONIC METER



Energy Efficient

Powered by two AA alkaline batteries.

Rugged Stainless Steel Body

Remains corrosion free in hard environments for years of trouble-free service.

Tracks Totals in Two Modes

Reset total for a periodic dispense history and non-reset total for the meter's total dispense history.

Large, Easy-to-Read LCD

Simple operator controls and measures in pints, quarts, liters or gallons.

TYPICAL APPLICATIONS

- Automotive dealerships
- Fast lube centers
- Service shops
- Heavy-duty dealerships
- Fleet services facilities
- In-plant
- Mining

TYPICAL FLUIDS

- Petroleum- and synthetic-based oils (motor, gear and ATF)
- Antifreeze
- Windshield washer fluid
- Diesel exhaust fluid

TECHNICAL SPECIFICATIONS

Flow Range*	0.5 gpm to 15 gpm (1.9 lpm to 57 lpm)
Maximum Working Pressure	1,500 psi (103 bar)
Units of Measure	Quarts, pints, gallons, liters (factory-set to quarts)
Accuracy	± 0.5%
Inlet/Outlet	1/2 NPT
Maximum Totalizer	99,999
Maximum Recorded Dispense	999.99
Operating Temperature Range	-4°F to 122°F (-20°C to 50°C)
Storage Temperature Range	-13°F to 122°F (-25°C to 50°C)
Outdoor Use	No
Battery	2AA alkaline
Wetted Parts	Nitrile rubber, SST and Geolast
Meter Pressure Loss*	22 psi (1.5 bar) @ 14 gpm (53 lpm)
Dimensions	5 in L x 3 in W x 2.75 in H (12.7 cm L x 7.6 cm W x 7 cm H)
Weight	1.8 lb (0.8 kg)
Warranty	Seven years overall, three years electronics
Instruction Manual	313048

*Tested in 10W oil at 70°F. Flow rates vary with fluid pressure, temperature and viscosity.



OIL DISPENSE METERS AND CONTROL VALVES

ORDERING OPTIONS

METERS

Part Number	Description
247453	SDI15 medium/high pressure – medium-/high-flow in-line meter for petroleum- and synthetic-based oils, antifreeze and windshield washer fluid
24G738	SDI15 medium/high pressure – medium-/high-flow in-line meter for diesel exhaust fluid applications (BSPP)

ACCESSORIES

	Part Number	Description
	108458	Shutoff ball valve 1/2 NPT(F)
	223179	Strainer kit 1/2 NPT(F) 1/2 NPT(M)

MECHANICAL METERS

ACCURATE DISPENSING FOR A WIDE VARIETY OF VEHICLE OR MACHINE SERVICE APPLICATIONS

Ideal for indoor or outdoor use in all size shops.

Impact-Resistant Shroud

Resists scratches and protects knob and dial from damage.

Built-In Totalizer

Helps manage material usage.

Simple, Easy Design

Dial and face design is easy to read and set.

Fluid Extension Kits

Choose from rigid or flexible with automatic thermal compensating nozzle.

Fluid Swivel

1/2 inch fluid inlet.

Durable Cast Housing

Durable aluminum body is balanced and lightweight with comfortable grip.



TYPICAL APPLICATIONS

- Automotive dealerships
- Fast lube centers
- Service shops
- Heavy-duty dealerships
- Fleet services facilities
- In-plant
- Lube trucks
- Mining

TYPICAL FLUIDS

- Petroleum- and synthetic-based oils (motor, gear and ATF)
- Antifreeze

TECHNICAL SPECIFICATIONS


Flow Range*	0.28 gpm (1.0 lpm) to 8 gpm (30.2 lpm)
Maximum Working Pressure	1,500 psi (103 bar)
Units of Measure	Quarts, gallons, liters
Accuracy	± 1%
Inlet	1/2 in NPT
Outlet	3/4-16 straight thread O-ring boss
Maximum Totalizer	99,999 units
Maximum Recorded Dispense	60 gallons
Operating Temperature Range	-50°F to 160°F (-45°C to 70°C)
Outdoor Use	Yes
Wetted Parts	Brass, aluminum, SST, TPE
Meter Pressure Loss*	30 psi (2.1 bar) @ 4 gpm (15 lpm)
Dimensions (L x W x H)	11.5 in x 5 in x 6.3 in (29.2 cm x 12.7 cm x 16 cm)
Weight	3.5 lb (1.6 kg)
Warranty	Five years
Instruction Manual	333492

*Tested with 10W motor oil. Minimum/maximum flow rates will vary with fluid viscosity.






ORDERING OPTIONS


MANUAL METERS

	Extension	Model Description	Part Number
	Bare	4/16 Liter	24U956
		4/16 Quart	24U959

MANUAL METER PACKAGES

	Extension	Model Description	Part Number	Replacement Nozzle/Extension Kit
	Flexible	4/16 Liter	24V043	26C268
4/16 Quart		24V034	26C268	
	Rigid	4/16 Liter	24V046	26C267
		4/16 Quart	24V037	26C267
	Gear Lube	4/16 Liter	24V049	255854
		4/16 Quart	24V040	255854




PRESET METERS

	Extension	Model Description	Part Number
	Bare	60 Gallon	24U950
		60 Liter	24U953
60 Quart		24U947	



MECHANICAL METERS

ORDERING OPTIONS


PRESET METER PACKAGES

	Extension	Model Description	Part Number	Package Includes
				Nozzle Extension
	Flexible	60 Gallon	24Z129	255853
		60 Liter	24Z132	255853
		60 Quart	24Z126	255853
	Rigid	60 Gallon	24Z128	255852
		60 Liter	24Z131	255852
		60 Quart	24Z125	255852
	Short Rigid	60 Gallon	24V055	24W641
		60 Liter	24V058	24W641
		60 Quart	24V052	24W641
	Gear Lube	60 Gallon	24Z130	255854
		60 Liter	24Z133	255854
		60 Quart	24Z127	255854

NOZZLE EXTENSIONS

	Fluid	Extension	Compatible Meter	Part Number
	Oil	Flexible	Manual	255853
		Rigid	Manual	255852
		Short Rigid	Preset	24W641
	Antifreeze	Flexible	Manual/Preset	24W306
		Rigid	Manual/Preset	255855
	Oil/Antifreeze	Flexible (extension only - 2 ft)	Manual/Preset	131733
	Gear lube	Rigid	Manual	255854

ACCESSORIES

	Part Number	Description
	256164	Strainer filter kit, 10-pack

OIL DISPENSE METERS AND CONTROL VALVES



SDV15 CONTROL VALVE

FOR STANDARD AND HEAVIER-DUTY APPLICATIONS

Designed to perform in larger dealerships, fleet maintenance shops, municipal garages and higher-volume in-plant applications with longer plumbing runs and larger fluid usage.



Fluid Extension Kits

Choose from rigid or flexible extensions.

Lock-On/Lock-Off Trigger

For hands-free operation.

Sturdy Cast Body

Designed for use in tough environments.

Fluid Swivel

1/2 inch fluid inlet.

OIL DISPENSE METERS AND CONTROL VALVES

TYPICAL APPLICATIONS

- Automotive dealerships
- Fast lube centers
- Service shops
- Lube trucks
- Heavy-duty dealerships
- Fleet services facilities
- In-plant
- Lube trucks
- Mining

TYPICAL FLUIDS

- Petroleum- and synthetic-based oils (motor, gear and ATF)
- Antifreeze

TECHNICAL SPECIFICATIONS






Flow Range*	15 gpm (56.8 lpm)
Maximum Working Pressure	1,500 psi (103 bar)
Inlet	1/2 in NPT
Outlet	3/4-16 straight thread O-ring boss
Operating Temperature Range	-40°F to 180°F (-40°C to 82°C)
Outdoor Use	Yes
Wetted Parts	Aluminum, SST, CS, acetal, nitrile rubber, tpe
Dimensions (L x W x H)	12 in x 8.4 in x 2.4 in (30.5 cm x 21.3 cm x 6.1 cm)
Weight	0.4 lb (0.18 kg)
Warranty	Seven years
Instruction Manual	312789

*Tested in 10W oil at 70°F. Flow rates vary with fluid pressure, temperature, viscosity, inlet fitting and nozzle type.


SDV15 CONTROL VALVE

ORDERING OPTIONS



SDV15 CONTROL VALVE

	Fluid	Extension	Inlet in (mm)	Part Number
	Oil	Rigid	1/2 (13)	247712
		Flexible		247713
	Antifreeze	Rigid		247715
		Flexible		247716
	Gear	Gear		247714


SDV15 BARE CONTROL VALVE

	Inlet in (mm)	Part Number
	1/2 (13)	247717

HIGH FLOW NOZZLES WITH EXTENSION

	Extension	Part Number
	Rigid	255857
	Flexible	255858

FILTER KIT

	Description	Part Number
	Strainer filter kit	256164

QUICK CLOSE NOZZLE

Extension sold separately.

	Fluid	Part Number
	Oil	17R220
	Antifreeze	255460
	Gear lube	255470
	Oil/Antifreeze (high-flow)	255461



XDV20 CONTROL VALVE

FOR STANDARD AND HEAVIER-DUTY APPLICATIONS

Designed to perform in larger dealerships, fleet maintenance shops, municipal garages and higher-volume in-plant applications with longer plumbing runs and larger fluid usage.

Fluid Extension Kits

Choose from rigid or flexible extensions with automatic flush-mount nozzle design that re-seats after each dispense to prevent dirt contamination.

Lock-On/Lock-Off Trigger

For hands-free operation.

Sturdy Cast Body

Designed for use in tough environments.

1/2 and 3/4 Inch Inlet with Swivel Options

Meets standard and high flow requirements.



OIL DISPENSE METERS AND CONTROL VALVES

TYPICAL APPLICATIONS

- High-flow, non-metered oil dispense
- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- In-plant
- Lube trucks
- Mining

TYPICAL FLUIDS

- Petroleum- and synthetic-based oils (motor, gear and ATF)
- Antifreeze

TECHNICAL SPECIFICATIONS

Flow Range*	Up to 20 gpm (75.7 lpm)
Maximum Working Pressure	1,500 psi (103 bar)
Inlet	1/2 in or 3/4 in NPT
Outlet	7/8-14 straight thread O-ring boss
Operating Temperature Range	-40°F to 180°F (-40°C to 82°C)
Outdoor Use	Yes
Wetted Parts	Aluminum, SST, CS, acetal, nitrile rubber, Geolast
Dimensions (L x W x H)	12 in x 8.4 in x 2.4 in (30.5 cm x 21.3 cm x 6.1 cm)
Weight	0.4 lb (0.18 kg)
Warranty	Seven years
Instruction Manual	308642



*Tested in 10W oil at 70°F. Flow rates vary with fluid pressure, temperature, viscosity, inlet fitting and nozzle type.

XDV20 CONTROL VALVE


ORDERING OPTIONS

XDV20 CONTROL VALVE




Includes high flow, quick-close nozzle.

	Extension	Inlet in (mm)	Part Number
	Rigid	1/2 (13)	247718
		3/4 (19)	247722
	Flexible	1/2 (13)	247721
		3/4 (19)	247723

XDV20 BARE CONTROL VALVE

	Inlet in (mm)	Part Number
	1/2 (13)	247724
	3/4 (19)	247725

ACCESSORIES

	Part Number	Description
	255793	Quick-close high-flow nozzle for oil, ATF and antifreeze
	255859	Flexible extension with quick-close nozzle (255793)
	255921	Rigid extension with quick-close nozzle (255793)




METER DISPENSE CONSOLES


ORDERING OPTIONS

LUBRICANT DISPENSE CONSOLES

Includes upper and lower plates with roller guides and brackets. Hoses not included.

	Part Number	Description	Package Includes	
			Dispense Valve Brackets (qty)	Water Bib Brackets (qty)
	222629	Six-station console	196471 (5)	110236 (1)
	223448	Four-station console	196471 (3)	110236 (1)
	222645	Single add-on fluid module	196471 (1)	-


LUBRICANT DISPENSE CONSOLES ACCESSORIES

	Part Number	Description
	110236	Water bib bracket
	110237	Dispense valve bracket for XD meters
	110285	Pistol-grip dispense valve bracket
	196471	Dispense valve bracket for LDP5, EM8 and EM20 meters
	249440	Dispense valve bracket for SD/Matrix meters



DISPENSE CONSOLES

ORDERING OPTIONS

OIL DISPENSE BAR

	Part Number	Description
	220107	Modular oil dispense bar supports up to 3 dispense taps (1 included) and optional meters. Add up to two additional dispense valves with tap kit 220112.

ACCESSORIES FOR OIL DISPENSE BAR

	Part Number	Description
	220112	Dispenser valve kit for adding dispense valves to modular oil dispense bar.
	Part Number	Description
	239706	Meter kit for adding IM5 electronic totalizing meter to dispense valve. Reads in gallons, quarts, pints and liters.

OIL DISPENSE METERS AND CONTROL VALVES

GREASE PUMPS

	Page
Grease Pump Selection Guide.....	116-117
LD Series™ Grease Pumps.....	118-122
LD Series™ Grease Pump Accessories.....	123-124
Mini Fire-Ball® 225 Grease Pumps.....	125-128
Fire-Ball® 300 Grease Pumps.....	129-136
Fire-Ball® 425 Grease Pumps.....	137-143
Grease Pump Accessories.....	144-147
GT 750 36:1 Grease Pumps.....	148-149
NXT™ Check-Mate® Grease Pumps.....	150-154
Dyna-Star® Hydraulic Grease Pumps.....	155-156
Manually-Operated Grease Pumps.....	157











GREASE PUMP SELECTION GUIDE

GREASE PUMPS AND PACKAGES

Pump Family and Fluid Pressure Ratio	Typical Applications	Annual Usage	Line Length	Simultaneous Dispense Points	Approx. Free Flow Rate @ 100 psi	Air Inlet	Fluid Outlet	Air Operation Range	Reference Page
LD, 50:1 	<ul style="list-style-type: none"> Automotive dealerships Fast lube centers Lube trucks Lubricant transfer Service shops 	Up to 7,000 lbs (3,175 kg)	Up to 100 (30.5 m)	1	4.5 lbs/min (2 kg/min)	1/4 in NPT(F)	1/4 in NPT(F)	20-150 psi (1.37-10.3 bar)	118-124
Mini Fire-Ball 225, 50:1 	<ul style="list-style-type: none"> Automotive dealerships Fast lube centers Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Lubricant transfer Mining Service shops 	Up to 10,000 lbs (4,535 kg)	Up to 100 (30.5 m)	1	1.5 lbs/min (0.7 kg/min)	3/8 in NPT(F)	1/4 in NPT(F)	40-140 psi (2.8-10 bar)	125-128 143-146
Fire-Ball 300, 15:1 	<ul style="list-style-type: none"> Automotive dealerships Fast lube centers Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Lubricant transfer Mining Service shops 	Up to 10,000 lbs (4,535 kg)	Up to 250 ft (76 m)	1-2	7.5 lbs/min (3.4 kg/min)	3/8 in NPT(F)	1/4 in NPT(F)	40-180 psi (2.8-12.5 bar)	129-131 143-146
Fire-Ball 300, 50:1 	<ul style="list-style-type: none"> Automotive dealerships Fast lube centers Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Lubricant transfer Mining Service shops 	Up to 10,000 lbs (4,535 kg)	Up to 250 ft (76 m)	1-2	7.5 lbs/min (3.4 kg/min)	3/8 in NPT(F)	1/4 in NPT(F)	30-140 psi (2.1-9.7 bar)	129-140 132-136 143-146
Fireball 425, 10:1 	<ul style="list-style-type: none"> Automotive dealerships Fast lube centers Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Lubricant transfer Mining Service shops 	> 20,000 lbs (9,072 kg)	Up to 500 ft (152 m)	4 or more	29 lbs/min (13.1 kg/min)	1/2 in NPT(F)	1 in NPT(F)	40-180 psi (2.8-12.5 bar)	137-138 144-146
Fire-Ball 425, 50:1 	<ul style="list-style-type: none"> Automotive dealerships Fast lube centers Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Lubricant transfer Mining Service shops 	> 20,000 lbs (9,072 kg)	Up to 250 ft (76 m)	4 or more	9 lbs/min (4.1 kg/min)	1/2 in NPT(F)	3/8 in NPT(F)	40-150 psi (2.8-10.3 bar)	137-139 141-147
Fire-Ball 425, 75:1 	<ul style="list-style-type: none"> Automotive dealerships Fast lube centers Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Lubricant transfer Mining Service shops 	> 20,000 lbs (9,072 kg)	Up to 500 ft (152 m)	4 or more	6.5 lbs/min (2.9 kg/min)	1/2 in NPT(F)	3/8 in NPT(F)	40-100 psi (2.8-7 bar)	136-138 140-147
GT 750, 36:1 	<ul style="list-style-type: none"> Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Mining 	> 20,000 lbs (9,072 kg)	Up to 250 ft (76 m)	4 or more	32 lbs/min (14.5 kg/min)	1/2 in NPT(F)	1 in NPT(F)	40-100 psi (2.8-7 bar)	148-149



Pump Family and Fluid Pressure Ratio	Typical Applications	Annual Usage	Air Inlet	Fluid Outlet	Air Operation Range	Reference Page
Check-Mate 14:1 	<ul style="list-style-type: none"> Fleet service facilities In-plant large runs Large volume lubricant transfer Mining remote fill 	> 20,000 lbs (9,072 kg)	3/4 in NPT(F)	1-1/2 in NPT(M)	0-100 psi (0-7 bar)	150-151 153-154
Check-Mate 26:1 	<ul style="list-style-type: none"> Fleet service facilities In-plant large runs Large volume lubricant transfer Mining remote fill 	> 20,000 lbs (9,072 kg)	3/4 NPT(F)	1-1/2 in NPT(M)	0-100 psi (0-7 bar)	150-151 154
Check-Mate 29:1 	<ul style="list-style-type: none"> Fleet service facilities In-plant large runs Large volume lubricant transfer Mining remote fill 	> 20,000 lbs (9,072 kg)	3/4 NPT(F)	1 in NPT(F)	0-100 psi (0-7 bar)	150-151 154
Check-Mate 55:1 	<ul style="list-style-type: none"> Fleet service facilities In-plant large runs Large volume lubricant transfer Mining remote fill 	> 20,000 lbs (9,072 kg)	3/4 NPT(F)	1 in NPT(F)	0-100 psi (0-7 bar)	150 152-154
Check-Mate 63:1 	<ul style="list-style-type: none"> Fleet service facilities In-plant large runs Large volume lubricant transfer Mining remote fill 	> 20,000 lbs (9,072 kg)	3/4 NPT(F)	3/4 in NPT(M)	0-72 psi (0-4.9 bar)	150 152-154
Check-Mate 68:1 	<ul style="list-style-type: none"> Fleet service facilities In-plant large runs Large volume lubricant transfer Mining remote fill 	> 20,000 lbs (9,072 kg)	3/4 NPT(F)	1 in NPT(F)	0-78 psi (0-5.4 bar)	150 152-154

Pump Family and Fluid Pressure Ratio	Typical Applications	Maximum Grease Output Flow Rate	Maximum Grease Output Pressure	Hydraulic Inlet (Supply)	Hydraulic Outlet (Return)	Grease Outlet	Maximum Hydraulic Inlet Pressure	Reference Page
Dyna-Star 5:1 	<ul style="list-style-type: none"> Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Lubricant transfer Mining Service shops 	4 lb/min (1.8 kg/min)	7,500 psi (517 bar)	3/8 in NPT(F)	3/4 in NPT(F)	1/2 in NPT(F)	1,500 psi (102 bar)	155-156
Dyna-Star 10:1 	<ul style="list-style-type: none"> Fleet service facilities Heavy-duty dealerships In-plant Lube trucks Lubricant transfer Mining Service shops 	1.1 lb/min (0.5 kg/min)	7,500 psi (517 bar)	3/4 in -16 JIC (37° Flare)	3/4 in NPT(F)	1/2 in NPT(F)	600 psi (41 bar)	155-156

LD SERIES™ 50:1 GREASE PUMPS

DURABLE AND HARDWORKING

Stay ahead of the competition with LD Series pumps. These affordable and full-featured pumps are designed for lower-volume (up to 7,000 lb/year) applications. LD pumps are fine-tuned for a compact, flexible and durable solution.

Three-Inch Air Motor

Provides more power to create better flow.

Modular Air Valve

Air inlet and exhaust locations are easy to configure with just four bolts for simple, hassle-free installations.

Pilot Valves

Patented self-cleaning design increases reliability in dirty air environments and minimizes pressure drop with rapid changeovers for reduced stalling and smoother flow.

Engineered for Durability

Patented cup and plate design eliminates the need for O-rings that wear out faster, for a more durable, longer-lasting solution.



TYPICAL APPLICATIONS


- Automotive dealerships
- Fast lube centers
- Service shops
- Lube trucks

TYPICAL FLUIDS

- Grease up to NLGI #2

PUMP PERFORMANCE

LD SERIES 50:1 PUMPS

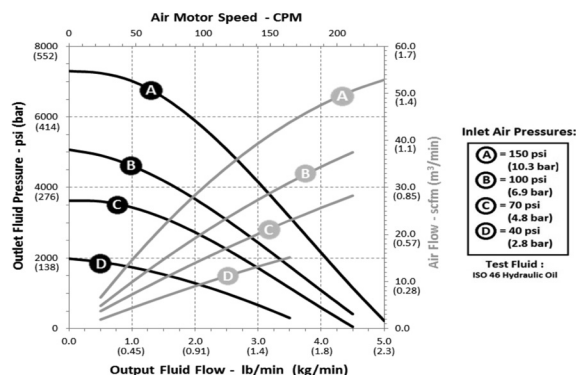



TECHNICAL SPECIFICATIONS

Fluid Pressure Ratio	50:1
Air Motor Effective Diameter	3 in (76.2 mm)
Annual Usage	Up to 7,000 lb (3,175 kg)
Maximum Fluid Working Pressure	7,500 psi (517 bar / 51.7 MPa)
Approximate Free Flow Rate @ 100 psi	4.5 lb/min (2 kg/min)
Output per Cycle	0.34 oz (9.7 g)
Approximate Air Use and Flow @ 100 psi (80 cpm)	16 @ 1.7 lb/min (0.45 @ 0.77 kg/min)
Air Inlet	1/4 in NPT(F)
Fluid Outlet	1/4 in NPT(F)
Air Operation Range	20 psi to 150 psi (1.37 bar to 10.3 bar)
Max Recommended Pump Speed	120 cpm
Cycles per Pound (Kg)	47 cpp (103 cpk)
Wetted Parts	Steel, brass, nitrile rubber, polyurethane, UHMWPE, acetal
Sound Pressure Level	72.9 dB(A)
Sound Power Level	82 dB(A)
Approximate Weight	35 lb drum – 11.2 lb (5.1 kg) 120 lb drum – 15.0 lb (6.8 kg) 400 lb drum – 17.0 lb (7.7 kg)
Instruction Manual	3A1334

ORDERING OPTIONS

LD SERIES 50:1 PUMPS

Part Number	Description
24G600	For 35 lb (16 kg) pail
24G603	For 120 lb (55 kg) drum
24G606	For 400 lb (180 kg) drum

LD SERIES 50:1 GREASE PUMP PACKAGES

ORDERING OPTIONS

35 LB GREASE PACKAGES



Package Number	24J030	26C169	25C549
Ratio	50:1	50:1	50:1
Type of Package	Stationary	Stationary	Mobile
Container Size	35 lb (16 kg)	35 lb (16 kg)	35 lb (16 kg)
Pump Part Number	24G600	24G600	24G600
Hose Kit	24H862	-	24H862
Hose Sizes	Grease 1/4 in ID x 6 ft (1.8 m) Air/Water 3/8 in ID x 6 ft (1.8 m)	Grease - Whip 1/8 in x 1/8 in x 30 in (0.8 m) Grease 1/4 in x 3/8 in x 20 ft (6.1 m)	Grease 1/4 in ID x 6 ft (1.8 m) Air/Water 3/8 in ID x 6 ft (1.8 m)
Follower Plate	24F901	24F901	24F901
Drum Cover	24F904	24F904	24F904
Grease Valve	129581	129581	129581
Z-Swivel	129591	129591	129591
Fitting(s)	-	157705	-
Air Regulator	-	24H420	-
Air Filter	-	106148	-
Portable Base	-	-	131183
Instruction Manual	3A1335	3A1335	3A1335



ORDERING OPTIONS

120 LB GREASE PACKAGES



Package Number	24J036	26C170	25C548	24J048	24J060	25N618
Ratio	50:1	50:1	50:1	50:1	50:1	50:1
Type of Package	Stationary	Stationary	Mobile	Mobile	Mobile	Mobile
Container Size	120 lb (54 kg)	120 lb (54 kg)	120 lb (54 kg)	120 lb (54 kg)	120 lb (54 kg)	120 lb (54 kg)
Pump Part Number	24G603	24G603	24G603	24G603	24G603	24G603
Hose Kit	24H862	-	24H862	24H862	24J501	-
Hose Sizes	Grease 1/4 in ID x 6 ft (1.8 m) Air/Water 3/8 in ID x 6 ft (1.8 m)	Grease – Whip 1/8 in x 1/8 in x 30 in (0.8 m) Grease 1/4 in x 3/8 in x 20 ft (6.1 m)	Grease 1/4 in ID x 6 ft (1.8 m) Air/Water 3/8 in ID x 6 ft (1.8 m)	Grease 1/4 in ID x 6 ft (1.8 m) Air/Water 3/8 in ID x 6 ft (1.8 m)	Grease 1/4 in ID x 6 ft (1.8 m) Air/Water 3/8 in ID x 6 ft (1.8 m)	Grease 1/4 in ID x 12 ft (3.7 m)
Follower Plate	24F902	24F902	24F902	24F902	24F902	24F902
Drum Cover	24F905	24F905	24F905	24F905	24F905	24F905
Grease Valve	129581	129581	129581	129581	129581	129581
Z-Swivel	129591	129591	129591	129591	129591	129591
Fitting(s)	-	157705	-	-	-	165198 / 169970
Air Regulator	-	24H420	-	-	-	24H420
Air Filter	-	106148	-	-	-	-
Portable Base	-	-	131184	24H422	24H422	131184
Hose Reel	-	-	-	-	LD	-
Hose Size	-	-	-	-	1/4 in x 35 ft	-
Hose Reel Part Number	-	-	-	-	HEH006	-
Instruction Manual	3A1335	3A1335	3A1335	3A1335	3A1335	3A1335

LD SERIES 50:1 GREASE PUMP PACKAGES

ORDERING OPTIONS

400 LB GREASE PACKAGES



Package Number	24J042	26C171	24J054	24J066
Ratio	50:1	50:1	50:1	50:1
Type of Package	Stationary	Stationary	Mobile	Mobile
Container Size	400 lb (180 kg)	400 lb (180 kg)	400 lb (180 kg)	400 lb (180 kg)
Pump Part Number	24G606	24G606	24G606	24G606
Hose Kit	24H862	-	24H862	24J501
Hose Sizes	Grease 1/4 in ID x 6 ft (1.8 m) Air/Water 3/8 in ID x 6 ft (1.8 m)	Grease – Whip 1/8 in x 1/8 in x 30 in (0.8 m) Grease 1/4 in x 3/8 in x 20 ft (6.1 m)	Grease 1/4 in ID x 6 ft (1.8 m) Air/Water 3/8 in ID x 6 ft (1.8 m)	Grease 1/4 in ID x 6 ft (1.8 m) Air/Water 3/8 in ID x 6 ft (1.8 m)
Follower Plate	24F903	24F903	24F903	24F903
Drum Cover	24F906	24F906	24F906	24F906
Grease Valve	129581	129581	129581	129581
Z-Swivel	129591	129591	129591	129591
Fitting(s)	-	157705	-	-
Air Regulator	-	24H420	-	-
Air Filter	-	106148	-	-
Type of Reel	-	-	-	LDX
Reel Size	-	-	-	3/8 in x 50 ft
Reel Part Number	-	-	-	HEH006
Portable Base	-	-	24F915	24F915
Instruction Manual	3A1335	3A1335	3A1335	3A1335

LD SERIES 50:1 GREASE PUMP ACCESSORIES



LD PRO-SHOT™ NON-METERED GREASE VALVES



- Rugged design for harsh environments
- Pressure-assisted trigger for ease of operation
- Easy adjustment with top locking nut
- 6 in steel extension with heavy-duty coupler


TECHNICAL SPECIFICATIONS

Pressure	7,500 psi (517 bar / 51.7 MPa)
Wetted Parts	Steel, nitrile rubber, PTFE
Inlet Size	1/4 in

ORDERING OPTIONS

Part Number	Description
129581	LD Pro Shot Grease Valve, 1/4 in NPT

LD Z-SWIVEL



- Swivels to prevent twist damage to hoses
- Constructed of heavy-duty steel and ball bearings for smooth and unrestricted movement

TECHNICAL SPECIFICATIONS

Pressure	6,000 psi (413 bar / 41.3 MPa)
Inlet Size	1/4 in


ORDERING OPTIONS

Part Number	Description
129591	Z-swivel, 1/4 in NPT



LD SERIES 50:1 GREASE PUMP ACCESSORIES

ORDERING OPTIONS


ADJUSTABLE BUNG ADAPTER

	Part Number	Description
	24P623	Adjustable bung adapter for LD pumps


AIR REGULATORS

	Part Number	Description
	24H420	Mini air pressure regulator with gauge, 1/4 in NPT x 3/8 in NPT, self-relieving
	133215	Mini air filter-regulator with gauge, 1/4 in NPT, self-relieving, semi-auto drain


CARTS

	Part Number	Description
	24H422	Drum cart with pneumatic wheels for 120 lb drums; includes chain for securing drum to cart
	24F915	Drum cart with pneumatic wheels for 400 lb drums; includes chain for securing drum to cart


DRUM COVERS

	Part Number	Description
	24F904	Cover for 35 lb (16 kg) pails
	24F905	Cover for open-head 120 lb (54 kg) drums
	24F906	Cover for open-head 400 lb (182 kg) drums



LD DRUM DOLLIES

	Part Number	Description
	131183	Drum Dolly, 35 lb (16 kg)
	131184	Drum Dolly, 120 lb (54 kg)
	129645	Drum Dolly, 400 lb (182 kg)

FOLLOWER PLATES

	Part Number	Description
	24F901	Follower plate for 35 lb (16 kg) pails
	24F902	Follower plate for 120 lb (54 kg) drums
	24F903	Follower plate for 400 lb (182 kg) drums

HOSE AND FITTING KITS

	Part Number	Description	Includes				
			Grease Hose	Grease Hose Size	Air Hose	Air Hose Size	Fitting
	24H862	6 ft LD grease pump hose kit	24H606	1/4 in NPT(M) x 1/4 in NPT(M) x 6 ft	24H858	3/8 in x 6 ft	156823
	24J501	6 ft LD grease pump hose kit	24J487	1/4 in NPT(M) x 1/4 in NPT(M) (with 90° swivel) x 6 ft	24H858	3/8 in x 6 ft	156823



MINI FIRE-BALL® 225 GREASE PUMPS

PERFECT FOR MEDIUM PRESSURE, LOW VOLUME APPLICATIONS

You can't afford downtime, especially when your shop is small. The Mini Fire-Ball 225 is designed with fewer moving parts, which means less wear and tear and reduced downtime, allowing you to run a more profitable business.



Durable Casting

Thick cast aluminum air motor housing offers unmatched durability.

Fewer Repairs

Fewer moving parts in the air motor assembly means less downtime and low repair cost.

Extended Seal Life

In-line pump design aligns the air motor piston and fluid piston rods to maximize seal life.

Superior Sealing

Non-metallic poppet valves offer positive sealing performance, even with contaminated "dirty" air environments for long life without repair.

Corrosion-Resistant

Corrosion-resistant design utilizes liquid salt nitriding, nickel plating, stainless steel, aluminum and chrome on key components for longer life.

TYPICAL APPLICATIONS


- Automotive dealerships
- Fast lube centers
- Service shops
- Heavy-duty dealerships
- Fleet services facilities
- In-plant
- Lube trucks
- Mining

TYPICAL FLUIDS

- Grease up to NLGI #2

PUMP PERFORMANCE

MINI FIRE-BALL 225 PUMPS

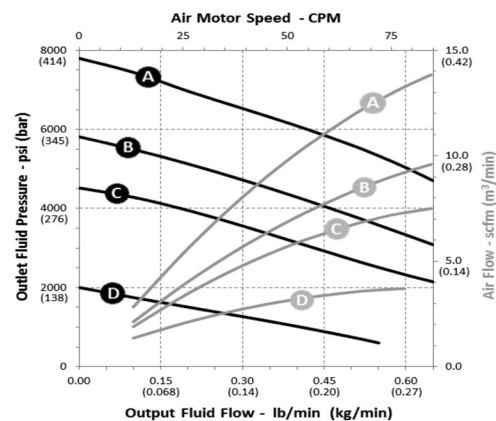

Inlet Air Pressures:

- A = 140 psi (9.7 bar)
- B = 100 psi (6.9 bar)
- C = 80 psi (5.5 bar)
- D = 40 psi (2.8 bar)

Test Fluid:
NLGI #2 Grease

MINI FIRE-BALL® 225 GREASE PUMPS

TECHNICAL SPECIFICATIONS

Fluid Pressure Ratio	50:1
Air Motor Effective Diameter	2.25 in (57.2 mm)
Annual Usage	Up to 10,000 lb (4,535 kg)
Maximum Fluid Working Pressure	8,400 psi (578 bar / 57.8 MPa)
Approximate Free Flow Rate @ 100 psi	1.5 lb/min (0.7 kg/min)
Output per Cycle	0.12 oz (3.5 g)
Continuous Duty Flow Rate	0.32 lb/min (0.15 kg/min)
Approximate Air Use and Flow @ 100 psi (80 cpm)	9.3 @ 0.62 lb/min (0.26 @ 0.28 kg/min)
Air Inlet	3/8 in NPT(F)
Fluid Outlet	1/4 in NPT(F)
Air Operation Range	40 psi to 140 psi (3 bar to 10 bar)
Max Recommended Pump Speed	100 cpm
Cycles per Pound (Kg)	130 cpp (287 cpk)
Wetted Parts	Carbon steel, zinc plating, brass, polyurethane, ultra-high molecular weight polyethylene, Buna-N
Sound Pressure Level	77.8 dB(A)
Sound Power Level	85.6 dB(A)
Approximate Weight	15 lb (6.8 kg)
Instruction Manual	309966

ORDERING OPTIONS

MINI FIRE-BALL 50:1 PUMPS

Part Number	Description
246909	For 35 lb (16 kg) pail
246780	For 120 lb (55 kg) drum
246781	For 400 lb (180 kg) drum

MINI FIRE-BALL® 225 GREASE PUMP PACKAGES



ORDERING OPTIONS

35 LB AND 50 LB GREASE PACKAGES



Package Number	246910*	246911*	246913*
Ratio	50:1	50:1	50:1
Type of Package	Portable pail dispenser	Stationary pail dispenser	Cart-mounted pail dispenser
Container Size	35 lb to 50 lb (16 kg to 23 kg)	35 lb to 50 lb (16 kg to 23 kg)	35 lb to 50 lb (16 kg to 23 kg)
Container	-	204134	204134
Pump Part Number	246909	246909	246909
Fluid Hose Size	1/4 in x 12 ft	1/4 in x 12 ft	1/4 in x 12 ft
Dispense Hose Kit	236058	236058	236058
Dispense Kit Includes	12 ft Hose	109151	109151
	Air Coupler	114558	114558
	Air Fitting	169971	169971
	Z-Swivel	202577	202577
	Pro-Shot Valve	242056	242056
Follower Plate	24F901	**	**
Drum Cover	222059	24R350	24R350
Portable Base	-	-	203650
Instruction Manual	309967	309967	309967

*Use 3/8 in (9.5 mm) air regulator (109075); must be ordered separately.

**Order follower plate (220653) separately for 35 lb (16 kg) pails or (220654) for 70 lb (32 kg) bulk.



246911

MINI FIRE-BALL® 225 GREASE PUMP PACKAGES

ORDERING OPTIONS

120 LB AND 400 LB GREASE PACKAGES

					
Package Number	246914*	246915*	246916*	246917*	
Ratio	50:1	50:1	50:1	50:1	
Type of Package	Stationary supply package	Portable package with caster base	Portable package with 2-wheel cart	Stationary supply package	
Container Size	120 lb (55 kg)	120 lb (55 kg)	120 lb (55 kg)	400 lb (180 kg)	
Pump Part Number	246780	246780	246780	246781	
Fluid Hose Size	1/4 in x 6 ft	1/4 in x 12 ft	1/4 in x 12 ft	1/4 in x 6 ft	
Dispense Hose Kit	222072	236058	236058	222072	
Dispense Kit Includes	12 ft Hose	-	109151	109151	-
	6 ft Hose	109150	-	-	109150
	6 ft Coupled Hose	203320	-	-	203320
	Air Coupler	-	114558	114558	-
	Air Fitting	-	169971	169971	-
	Z-Swivel	-	202577	202577	-
	90° Fitting(s)	155494 / 155541	-	-	155494 / 155541
	Pro-Shot Valve	-	242056	242056	-
Follower Plate	24F902	24F902	24F902	24F903	
Drum Cover	24R350	24R350	24R350	200326	
Portable Base	-	203622	203650	-	
Instruction Manual	309967	309967	309967	309967	

*Use 3/8 in (9.5 mm) air regulator (109075); must be ordered separately.



FIRE-BALL® 300 GREASE PUMPS

IDEAL FOR SHOPS WITH GREASE TRANSFER

Install the Fire-Ball 300 in grease dispense applications. A differential air motor ensures smooth the double-acting pump design provides reliable grease flow and accurate dispense.



Durable Casting

Thick cast aluminum air motor housing offers unmatched durability.

Fewer Repairs

Fewer moving parts in the air motor assembly means less downtime and low repair cost.

Extended Seal Life

In-line pump design aligns the air motor piston and fluid piston rods to maximize seal life.

Superior Sealing

Non-metallic poppet valves offer positive sealing performance, even with contaminated "dirty" air environments for long life without repair.

Corrosion-Resistant

Corrosion-resistant design utilizes liquid salt nitriding, nickel plating, stainless steel, aluminum and chrome on key components for longer life.

TYPICAL APPLICATIONS

- Automotive dealerships
- Fast lube centers
- Service shops
- Heavy-duty dealerships
- Fleet services facilities
- In-plant
- Lube trucks
- Mining


TYPICAL FLUIDS

- Grease up to NLGI #2


FIRE-BALL® 300 GREASE PUMPS

PUMP PERFORMANCE

FIRE-BALL 300 15:1 PUMPS

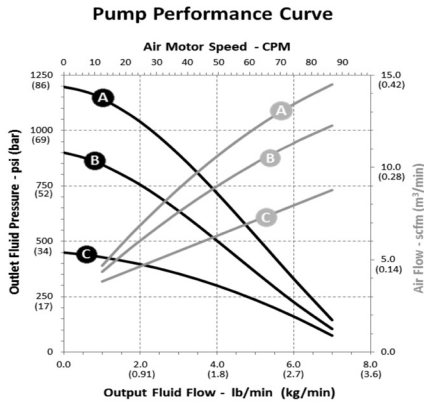

FIRE-BALL 300 50:1 PUMPS

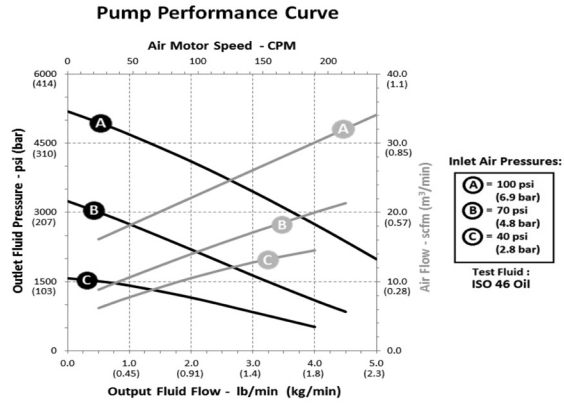

TECHNICAL SPECIFICATIONS

	Fire-Ball 300 15:1	Fire-Ball 300 50:1
Fluid Pressure Ratio	15:1	50:1
Air Motor Effective Diameter	3 in (76.2 mm)	3 in (76.2 mm)
Annual Usage	Up to 10,000 lb (4,535 kg)	Up to 10,000 lb (4,535 kg)
Maximum Fluid Working Pressure	2,700 psi (186 bar / 18.6 MPa)	8,400 psi (579 bar / 57.9 MPa)
Approximate Free Flow Rate @ 100 psi	7.5 lb/min (3.4 kg/min)	7.5 lb/min (3.4 kg/min)
Output per Cycle	1.29 oz (36.6 g)	0.34 oz (9.5 g)
Continuous Duty Flow Rate	0.7 lb/min (0.32 kg/min)	1.19 lb/min (0.54 kg/min)
Approximate Air Use and Flow @ 100 psi (80 cpm)	14 @ 6.5 lb/min (0.40 @ 2.9 kg/min)	21 @ 1.7 lb/min (0.59 @ 0.77 kg/min)
Air Inlet	3/8 in NPT(F)	3/8 in NPT(F)
Fluid Outlet	1/4 in NPT(F)	1/4 in NPT(F)
Air Operation Range	40 psi to 180 psi (2.8 bar to 12.5 bar)	30 psi to 140 psi (3.0 bar to 9.7 bar)
Max Recommended Pump Speed	66 cpm	76 cpm
Cycles per Pound (Kg)	12.4 cpp (27 cpk)	47.4 cpp (105 cpk)
Wetted Parts	Carbon steel, brass, copper, aluminum, PTFE, nitrile rubber, leather	Steel, brass, aluminum, acetal, nitrile rubber, polyurethane
Sound Pressure Level	77.8 dB(A)	77.8 dB(A)
Sound Power Level	85.6 dB(A)	85.6 dB(A)
Approximate Weight	22 lb (10 kg)	22 lb (10 kg)
Instruction Manual	306531	308883

ORDERING OPTIONS

FIRE-BALL 300 GREASE PUMPS

Part Number	Ratio	Description
206405	15:1	For 35 lb (16 kg) pail
206699	15:1	For 120 lb (55 kg) drum
206700	15:1	For 400 lb (180 kg) drum
239877	50:1	For 35 lb or 70 lb (16 kg or 32 kg) pail
239887	50:1	For 120 lb (55 kg) drum
239888	50:1	For 400 lb (180 kg) drum

FIRE-BALL® 300 GREASE PUMP PACKAGES



ORDERING OPTIONS

15:1 GREASE PUMP PACKAGES



Package Number	222078	220170	220171	
Type of Package	Stationary Pail Dispenser	Stationary Drum Dispenser	Cover-Mounted Drum Dispenser	
Ratio	15:1	15:1	15:1	
Container Size	35 lb (16 kg)	120 lb (55 kg)	400 lb (180 kg)	
Pump Part Number	206405	206699	206700	
Dispense Kit	222080	222081	222081	
Dispense Kit Includes	Fluid Hose	1/4 in x 15 ft	1/4 in x 25 ft	1/4 in x 25 ft
	Hose Part Number	109165	109167	109167
	Air Coupler	110198	110198	110198
	Air Fitting	-	169971	169971
	Closed Nipple	156849	156849	156849
	Z-Swivel	202577	202577	202577
	Fitting(s)	169971	-	-
	Dispenser	Pro-Shot	Pro-Shot	Pro-Shot
	Dispenser Part Number	242056	242056	242056
	Air Regulator	110234	110234	110234
Air Pressure Gauge	100960	100960	100960	
Drum Cover	222058	204574	200326	
Instruction Manual	307882	307882	307882	

FIRE-BALL® 300 GREASE PUMP PACKAGES

ORDERING OPTIONS

50:1 25 TO 50 LB GREASE PUMP PACKAGES



Package Number	222069*	245694*	225827*	225773*	245695*	226012*
Type of Package	Portable pail dispenser	Portable pail dispenser	Stationary pail dispenser	Cart-mounted pail dispenser	Cart-mounted pail dispenser	Cart-mounted pail topper
Ratio	50:1	50:1	50:1	50:1	50:1	50:1
Container Size	25 lb to 35 lb (11 kb to 16 kg)	25 lb to 35 lb (11 kb to 16 kg)	35 lb to 50 lb (16 kg to 23 kg)	35 lb to 50 lb (16 kg to 23 kg)	35 lb to 50 lb (16 kg to 23 kg)	35 lb (16 kg)
Pump Part Number	239877	239877	239877	239877	239877	239877
Dispense Kit	222070	245697	222070	222070	245697	222070
Dispense Kit Includes	Fluid Hose	1/4 in x 12 ft	1/4 in x 12 ft	1/4 in x 12 ft	1/4 in x 12 ft	1/4 in x 12 ft
	Hose Part Number	109151	109151	109151	109151	109151
	Air Coupler	114558	114558	114558	114558	114558
	Air Fitting	169971	169971	169971	169971	169971
	Z-Swivel	202577	202577	202577	202577	202577
	Dispenser	Pro-Shot	Accu-Shot	Pro-Shot	Pro-Shot	Accu-Shot
	Dispenser Part Number	242056	233807	242056	242056	233807
Follower Plate	24F901	220653	**	**	**	-
Drum Cover	222059	222059	24R350	24R350	204574	-
Holster	-	-	203976	203976	203976	203976
Container	-	-	204134	204134	204134	-
Portable Base	-	-	-	203650	203650	203650
Elevator	-	-	-	-	-	203664
Inductor Plate	-	-	-	-	-	204351
Instruction Manual	307878	307878	307878	307878	307878	307878

*Use 3/8 in (9.5 mm) air regulator (109075); must be ordered separately.

**Order follower plate 220654 separately, if needed.

GREASE PUMPS AND PACKAGES



ORDERING OPTIONS

50:1 120 LB GREASE PUMP PACKAGES

							
							
Package Number	225006*	225026*	26C185*	26C186*	245696*	222245*	
Type of Package	Portable with caster base	Portable with 2-wheel cart	Portable with caster base	Portable with 2-wheel cart	Portable with 2-wheel cart	Portable with heavy duty cart	
Ratio	50:1	50:1	50:1	50:1	50:1	50:1	
Container Size	120 lb (55 kg)	120 lb (55 kg)	120 lb (55 kg)	120 lb (55 kg)	120 lb (55 kg)	120 lb (55 kg)	
Pump Part Number	239887	239887	239887	239887	239887	239887	
Dispense Kits	222070	222070	26C183	26C183	245697	222383	
Dispense Kit Includes	Fluid Hose	1/4 in x 12 ft	1/4 in x 12 ft	1/4 in x 12 ft	1/4 in x 12 ft	1/4 in x 12 ft	1/4 in x 25 ft
	Hose Part Number	109151	109151	109151	109151	109151	109154
	6 ft Coupled Hose	-	-	-	-	-	-
	Air Coupler	114558	114558	114558	114558	114558	114558
	Air Fitting	169971	169971	169971	169971	169971	169971
	Z-swivel	202577	202577	202577	202577	202577	202577
	Fitting(s)	-	-	-	-	-	-
	Dispenser	Pro-Shot	Pro-Shot	Pro-Shot	Pro-Shot	Accu-Shot	Pro-Shot
Dispenser Part Number	242056	242056	26C184	26C184	233807	242056	
Fluid Hose Size	See kit above	See kit above	See kit above	See kit above	See kit above	See kit above	
Air Hose Size	-	-	-	-	-	-	
Meter	See kit above	See kit above	See kit above	See kit above	See kit above	See kit above	
Meter Part Number	See kit above	See kit above	See kit above	See kit above	See kit above	See kit above	
Follower Plate	24F902	24F902	24F902	24F902	220654	24F902	
Drum Cover	24R350	24R350	24R350	24R350	204574	222060	
Holster	203976	203976	203976	203976	203976	-	
Portable Base	203622	203650	203622	203650	203650	222243	
Elevator	-	-	-	-	-	-	
Pump Support	-	-	-	-	-	-	
Hold Down Kit	-	-	-	-	-	222061	
Instruction Manual	307878	307878	307878	307878	307878	307878	

*Use 3/8 in (9.5 mm) air regulator (109075); must be ordered separately.

GREASE PUMPS AND PACKAGES

FIRE-BALL® 300 GREASE PUMP PACKAGES

ORDERING OPTIONS

50:1 120 LB GREASE PUMP PACKAGES (CONT.)



Package Number	225014*	222073*	
Type of Package	Stationary supply	Stationary supply topper-inductor	
Ratio	50:1	50:1	
Container Size	120 lb (55 kg)	120 lb (55 kg)	
Pump Part Number	239887	239887	
Dispense Kits	222072	-	
Dispense Kit Includes	Fluid Hose	1/4 in x 6 ft	-
	Hose Part Number	109150	-
	6 ft Coupled Hose	203320	-
	Air Coupler	-	-
	Air Fitting	-	-
	Z-swivel	-	-
	Fitting(s)	155494/155541	-
	Dispenser	-	-
	Dispenser Part Number	-	-
Fluid Hose Size	See kit above	-	
Air Hose Size	See kit above	-	
Follower Plate	24F902	-	
Drum Cover	24R350	-	
Holster	-	-	
Portable Base	-	-	
Elevator	-	204121	
Pump Support	-	222074	
Hold Down Kit	-	-	
Instruction Manual	307880	306523	

50:1 400 LB GREASE PUMP PACKAGES



Package Number	225016*	226013*	
Type of Package	Stationary supply	Stationary supply topper-inductor	
Ratio	50:1	50:1	
Container Size	400 lb (180 kg)	400 lb (180 kg)	
Pump Part Number	239888	239888	
Hose and Fitting Kits	222072	204467	
Dispense Kit Includes	Fluid Hose	1/4 in x 6 ft	1/4 in x 6 ft
	Hose Part Number	109150	109150
	6 ft Coupled Hose	203320	-
	Fitting(s)	155494/155541	100206/156971/205528
Air Hose Size	3/8 in x 6 ft	3/8 in x 6 ft	
Follower Plate	24F903	-	
Drum Cover	200326	-	
Elevator	-	204385	
Pump Support	-	204461	
Inductor Plate	-	204353	
Base	-	205339	
Instruction Manual	307880	306556	

*Use 3/8 in (9.5 mm) air regulator (109075); must be ordered separately.

*Use 3/8 in (9.5 mm) air regulator (109075); must be ordered separately.



ORDERING OPTIONS

50:1 GREASE PUMP LUBE TRUCK PACKAGES




Package Number	222085*	222071*	
Type of Package	Lube truck	Lube truck	
Ratio	50:1	50:1	
Container Size	120 lb (55 kg)	400 lb (180 kg)	
Pump Part Number	239887	239888	
Dispense Kits	222072	222072	
Dispense Kit Includes	Fluid Hose	1/4 in x 6 ft	1/4 in x 6 ft
	Hose Part Number	109150	109150
	6 ft Coupled Hose	203320	203320
	Fitting(s)	155494/155541	155494/155541
Air Hose Size	3/8 in x 6 ft	3/8 in x 6 ft	
Follower Plate	220654	223845	
Drum Cover	222060	207366	
Hold Down Kit	222061	207361	
Instruction Manual	307880	307880	

*Use 3/8 in (9.5 mm) air regulator (109075); must be ordered separately.

FIRE-BALL® 300 GREASE PUMP PACKAGES

ORDERING OPTIONS

50:1 GREASE PUMP SIDE POCKET AND HORIZONTAL MOUNT PACKAGES

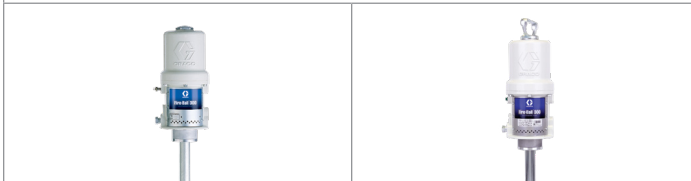

Package Number	244644	244645
Type of Package	Side Pocket Mount	Horizontal Mount
Ratio	50:1	50:1
Pump Part Number	239888	239877
Dispense Kits	222072	222072
Dispense Kit Includes	Fluid Hose	1/4 in x 6 ft
	Hose Part Number	109150
	6 ft Coupled Hose	203320
	Fitting(s)	155494/155541
Air Hose Size	3/8 in x 6 ft	3/8 in x 6 ft
Pump Mount Bracket	3 in (f) Coupler – 512874	3 in (f) Coupler – 512874
Air Regulator	109075	109075
Air Shut-Off Valve	110224	110224
Installation Kit	948393	948393
Instruction Manual	309350	309350



FIRE-BALL[®] 425 GREASE PUMPS

THE PUMP OF CHOICE FOR YOUR MOST DEMANDING APPLICATIONS!

The Fire-Ball 425 features a large air motor to supply the power you need for long pipe runs and higher-volume dispensing. An ideal choice for applications where multiple dispenses happen at the same time.



Durable Casting

Thick cast aluminum air motor housing offers unmatched durability.

Fewer Repairs

Fewer moving parts in the air motor assembly means less downtime and low repair cost.

Extended Seal Life

In-line pump design aligns the air motor piston and fluid piston rods to maximize seal life.

Superior Sealing

Non-metallic poppet valves offer positive sealing performance, even with contaminated "dirty" air environments for long life without repair.

Corrosion-Resistant

Corrosion-resistant design utilizes liquid salt nitriding, nickel plating, stainless steel, aluminum and chrome on key components for longer life.

TYPICAL APPLICATIONS

- Automotive dealerships
- Fast lube centers
- Service shops
- Heavy-duty dealerships
- Fleet services facilities
- In-plant
- Lube trucks
- Mining


TYPICAL FLUIDS

- Grease up to NLGI #2

FIRE-BALL® 425 GREASE PUMPS


PUMP PERFORMANCE

FIRE-BALL 425 10:1 PUMPS

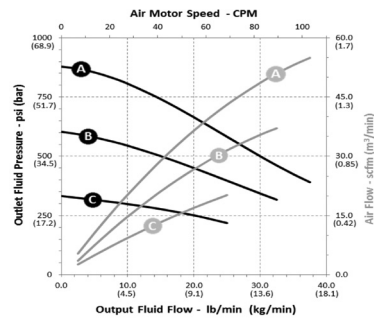


Inlet Air Pressures:
A = 100 psi (6.9 bar)
B = 70 psi (4.8 bar)
C = 40 psi (2.8 bar)
Test Fluid:
 ISO 32 Oil

FIRE-BALL 425 50:1 PUMPS

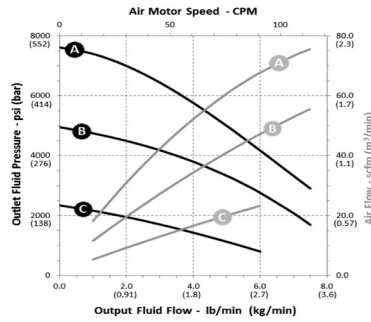

Inlet Air Pressures:
A = 150 psi (10.3 bar)
B = 100 psi (6.9 bar)
C = 50 psi (3.4 bar)
Test Fluid:
 NLGI #2 Grease

FIRE-BALL 425 75:1 PUMPS

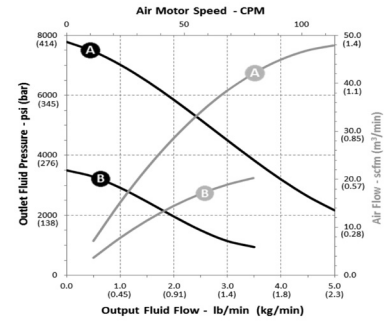

Inlet Air Pressures:
A = 100 psi (6.9 bar)
B = 50 psi (3.4 bar)
C = 30 psi (2.1 bar)
Test Fluid:
 NLGI #2 Grease

TECHNICAL SPECIFICATIONS

	Fire-Ball 425 10:1	Fire-Ball 425 50:1	Fire-Ball 425 75:1
Fluid Pressure Ratio	10:1	50:1	75:1
Air Motor Effective Diameter	4.25 in (108 mm)	4.25 in (108 mm)	4.25 in (108 mm)
Annual Usage	20,000+ lb (9,072+ kg)	20,000+ lb (9,072+ kg)	20,000+ lb (9,072+ kg)
Maximum Fluid Working Pressure	1,800 psi (124 bar / 12.4 MPa)	7,500 psi (517 bar / 51.7 MPa)	7,500 psi (517 bar / 51.7 MPa)
Approximate Free Flow Rate @ 100 psi	29 lb/min (13.1 kg/min)	9 lb/min (4.1 kg/min)	6.5 lb/min (2.9 kg/min)
Output per Cycle	5.82 oz (164.7 g)	1.06 oz (30 g)	0.71 oz (20 g)
Continuous Duty Flow Rate	3.5 lb/min (1.59 kg/min)	3.35 lb/min (1.52 kg/min)	1.95 lb/min (0.88 kg/min)
Approximate Air Use and Flow @ 100 psi (80 cpm)	45 @ 29 lb/min (1.3 @ 13 kg/min)	43 @ 5.3 lb/min (1.2 @ 2.4 kg/min)	43 @ 3.5 lb/min (1.2 @ 1.6 kg/min)
Air Inlet	1/2 in NPT(F)	1/2 in NPT(F)	1/2 in NPT(F)
Fluid Outlet	1 in NPT(F)	3/8 in NPT(F)	3/8 in NPT(F)
Air Operation Range	40 psi to 180 psi (2.8 bar to 12.5 bar)	40 psi to 150 psi (2.8 bar to 10.4 bar)	40 psi to 100 psi (2.8 bar to 7 bar)
Max Recommended Pump Speed	60 cpm	60 cpm	60 cpm
Cycles per Pound	2.75 cpp	15.1 cpp	22.7 cpp
Cycles per Kg	6 cpk	33 cpk	50 cpk
Wetted Parts	Steel, brass, aluminum, leather, Buna-N	CS, brass, aluminum, leather	CS, brass, aluminum, leather
Sound Pressure Level	80.9 dB(A)	80.9 dB(A)	80.9 dB(A)
Sound Power Level	94.6 dB(A)	94.6 dB(A)	94.6 dB(A)
Approximate Weight	38 lb (17.2 kg)	34 lb to 37 lb (15 kg to 17 kg)	30 lb to 37 lb (14 kg to 17 kg)
Instruction Manual	309407	306674	308777

ORDERING OPTIONS

FIRE-BALL 425 GREASE PUMPS

Part Number	Ratio	Description
965124	10:1	Stubby pump
965129*	10:1	For 400 lb (180 kg) drum
205394	50:1	For 120 lb (55 kg) drum
205395	50:1	For 400 lb (180 kg) drum

Part Number	Ratio	Description
239731	75:1	For 35 or 70 lb (16 or 32 kg) pail
239729	75:1	For 120 lb (55 kg) drum
239730	75:1	For 400 lb (180 kg) drum

*Includes 2 in NPT Bung Adapter (part number 222308).

FIRE-BALL® 425 GREASE PUMP PACKAGES



ORDERING OPTIONS

50:1 120 LB AND 400 LB GREASE PUMP PACKAGES



Package Number	223108*	225781*	226018*
Type of Package	Stationary Supply	Stationary Supply	Stationary Supply Topper-Inductor
Ratio	50:1	50:1	50:1
Container Size	120 lb (55 kg)	400 lb (180 kg)	400 lb (180 kg)
Pump Part Number	205394	205395	205395
Dispense Kits	222076	222076	205102
Dispense Kit Includes	Fluid Hose	3/8 in x 6 ft	3/8 in x 6 ft
	Hose Part Number	109163	109163
	6 ft Coupled Hose	205418	-
	Fitting(s)	155470/155494	156859/196220/205528
Air Hose Size	1/2 in x 6 ft	1/2 in x 6 ft	1/2 in x 6 ft
Drum Cover	204574	200326	-
Follower Plate	223344	223846	-
Pump Support	-	-	204461
Elevator	-	-	204385
Inductor Plate	-	-	205699
Base	-	-	205339
Instruction Manual	307880	307880	306556

*Use 1/2 in (12.7 mm) air regulator (104266) and gauge (100960); must be ordered separately.

FIRE-BALL® 425 GREASE PUMP PACKAGES

ORDERING OPTIONS

75:1 120 LB AND 400 LB GREASE PUMP PACKAGES



Package Number	244635*	244636*	244637*
Type of Package	Stationary Cover-Mount	Stationary Cover-Mount	Stationary Inductor
Ratio	75:1	75:1	75:1
Container Size	120 lb (55 kg)	400 lb (180 kg)	400 lb (180 kg)
Pump Part Number	239729	239730	239730
Dispense Kits	222076	222076	205102
Dispense Kit Includes	Fluid Hose	3/8 in x 6 ft	3/8 in x 6 ft
	Hose Part Number	109163	109163
	6 ft Coupled Hose	205418	-
	Fitting(s)	155470/155494	155470/155494
Air Hose Size	1/2 in x 6 ft	1/2 in x 6 ft	1/2 in x 6 ft
Drum Cover	204574	200326	-
Follower Plate	223344	223846	-
Pump Support	-	-	204461
Elevator	-	-	204385
Inductor Plate	-	-	205699
Base	-	-	205339
Instruction Manual	307880	307880	306556

*Use 1/2 in (12.7 mm) air regulator (104266) and gauge (100960); must be ordered separately.

GREASE PUMPS AND PACKAGES



ORDERING OPTIONS

50:1 AND 75:1 GREASE PUMP LUBE TRUCK PACKAGES



Package Number	223107*	222075*	243817*	243818**
Type of Package	Lube Truck	Lube Truck	Lube Truck	Lube Truck
Ratio	50:1	50:1	75:1	75:1
Container Size	120 lb (55 kg)	400 lb (180 kg)	120 lb (55 kg)	400 lb (180 kg)
Pump Part Number	205394	205395	239729	239730
Dispense Kits	222076	222076	222076	222076
Dispense Kit Includes	Fluid Hose	3/8 in x 6 ft	3/8 in x 6 ft	3/8 in x 6 ft
	Hose Part Number	109163	109163	109163
	6 ft Coupled Hose	205418	205418	205418
	Fitting(s)	155470/155494	155470/155494	155470/155494
Air Hose Size	1/2 in x 6 ft	1/2 in x 6 ft	1/2 in x 6 ft	1/2 in x 6 ft
Drum Cover	222060	207366	222060	207366
Follower Plate	223344	223846	223344	223846
Hold Down Kit	222061	207361	222061	207361
Instruction Manual	307880	307880	307880	307880

*Use 1/2 in (12.7 mm) air regulator (104266) and gauge (100960); must be ordered separately.

**Use 3/8 in (9.5 mm) air regulator (109075); must be ordered separately.

FIRE-BALL® 425 GREASE PUMP RAM PACKAGES


ORDERING OPTIONS

GREASE PUMP RAM PACKAGES



RAM-Mount

- Force feed high volume pumps
- Extreme viscous grease
- Reduce waste
- Clean and convenient method of drum change

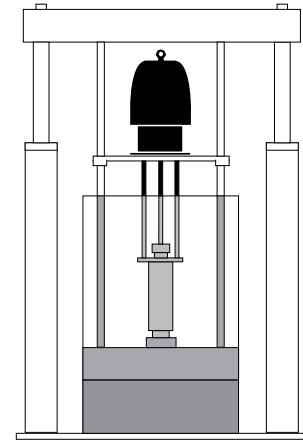

Package Number	244905	244906
Type of Package	Stationary Ram	Stationary Ram
Ratio	50:1	75:1
Container Size	400 lb (180 kg)	400 lb (180 kg)
Pump Part Number	Fire-Ball 425 – 205395	Fire-Ball 425 – 239730
Dispense Kits	222076	222076
Dispense Kit Includes	Fluid Hose	3/8 in x 6 ft
	Hose Part Number	109163
	6 ft Coupled Hose	205418
	Fitting(s)	155470/155494
Air Hose Size	1/2 in x 6 ft	1/2 in x 6 ft
Ram	257435	257435
Adapter Kit	224266	224266
Air Regulator and Gauge	*	244844
Ram Plate Seal Kit	247335	247335
Pump Mount Kit	247337	247337
Instruction Manual	309345	309345

*Air gauge included with RAM controller.

FIRE-BALL® 425 GREASE PUMP PACKAGES



ORDERING OPTIONS

50:1 AND 75:1 GREASE PUMP SIDE POCKET AND HORIZONTAL MOUNT PACKAGES




Package Number	244646	244647	244648	
Type of Package	Side Pocket Mount	Side Pocket Mount	Horizontal Mount	
Ratio	50:1	75:1	75:1	
Pump Part Number	205395	239730	239731	
Dispense Kits	222076	222076	222076	
Dispense Kit Includes	Fluid Hose	3/8 in x 6 ft	3/8 in x 6 ft	3/8 in x 6 ft
	Hose Part Number	109163	109163	109163
	6 ft Coupled Hose	205418	205418	205418
	Fitting(s)	155470/155494	155470/155494	155470/155494
Air Hose Size	1/2 in x 6 ft	1/2 in x 6 ft	1/2 in x 6 ft	
Pump Mount Bracket	3 in (f) Coupler – 512874	3 in (f) Coupler – 512874	3 in (f) Coupler – 512874	
Air Regulator	244844	244844	244844	
Air Shut-Off Valve	110225	110225	110225	
Installation Kit	948392	948392	948392	
Instruction Manual	309350	309350	309350	


FIRE-BALL GREASE PUMP ACCESSORIES

ORDERING OPTIONS


AIR REGULATORS

	Part Number	Description
	109075	3/8 in NPT (fbe) with gauge
	244844	1/2 in NPT (fbe) with gauge


BLEED-TYPE AIR SHUT-OFF VALVES

	Part Number	Description
	110223	1/4 in NPT
	110224	3/8 in NPT
	110225	1/2 in NPT
	110226	3/4 in NPT


BUNG ADAPTERS

	Part Number	Dimensions	Compatible Pumps
	239965	1.65 in ID	Fire-Ball 425, 50:1 Fire-Ball 425, 75:1
	239966	1.29 in ID	Fire-Ball 300, 15:1 Fire-Ball 300, 50:1

DISPENSE HOSE AND FITTING KITS

	Part Number	Compatible Pump(s)	Includes							
			Fluid Hose Size	Fluid Hose	Grease Dispense Valve	Z-Swivel	3/8 in Closed Nipple	Quick-Disconnect Nipple	Quick-Disconnect Coupler	3/8 in Air Regulator
	222080	Fire-Ball 300, 15:1	1/4 in x 15 ft	109165	242056	202577	156849	169971	110198	110234
	222081	Fire-Ball 300, 15:1	1/4 in x 25 ft	109167	242056	202577	156849	169971	110198	110234
	236058	Mini Fire-Ball 225, 50:1	1/4 in x 12 ft	109151	242056	202577	-	169971	114558	-
	222070	Fire-Ball 300, 50:1	1/4 in x 12 ft	109151	242056	202577	-	169971	114558	-
	26C183	Fire-Ball 300, 50:1	1/4 in x 12 ft	109151	26C184	202577	-	169971	114558	-
	222383	Mini Fire-Ball 225, 50:1 Fire-Ball 300, 50:1	1/4 in x 25 ft	109154	242056	202577	-	169971	114558	-


HOSE AND FITTING KITS

	Part Number	Pressure Rating	Compatible Pumps	Includes			
				6 ft Air Hose	Air Hose Swivel Elbow	6 ft Fluid Hose	Fluid Hose Swivel Elbow
	222072	5,000 psi (345 bar)	Fire-Ball 300, 50:1	203320	155494	109150	155541
222076	4,000 psi (276 bar)	Fire-Ball 425, 50:1	205418	155470	109163	155494	




ORDERING OPTIONS




DRUM COVERS

	Part Number	Description	Compatible Pumps
	222059	Cover for 35 lb (16 kg) pails	Mini Fire-Ball 225, 50:1 Fire-Ball 300, 50:1
	24R350	LD Cover for open-head 35 lb (16 kg), 70 lb (32 kg) or 120 lb (55 kg) drums	Mini Fire-Ball 225, 50:1 Fire-Ball Pumps
	204574	SD Cover for open-head 70 lb (32 kg) or 120 lb (55 kg)	Mini Fire-Ball 225, 50:1 Fire-Ball Pumps
	200326	Cover for open-head 400 lb (180 kg) drums	Mini Fire-Ball 225, 50:1 Fire-Ball 300, 15:1 Fire-Ball 300, 50:1 Fire-Ball 425, 10:1 and 50:1
	160754	Bung-adapter plate for mounting pump to 120 lb (55 kg) or 400 lb (180 kg) drum covers	Fire-Ball Pumps

DRUM ELEVATOR

	Part Number	Description	Includes		
			Cover Support	Drum Elevator	Air Control Kit
	241663	Air-powered elevator to speed up 400 lb (180 kg) drum changes	207562	204385	207561

MOUNTING ACCESSORIES FOR FIRE-BALL PUMPS

	Part Number	Description
	948393	Flange Adapter (male) for Fire-Ball 300 Pumps
	948392	Flange Adapter (male) for Fire-Ball 425 Pumps
	512874	Coupler (female), 3 in thread

FIRE-BALL GREASE PUMP ACCESSORIES

ORDERING OPTIONS

FOLLOWER PLATES



Part Number	Container Size	Flexible Wiper	Compatible Pumps
24F901	35 lb (16 kg)	16F769	LD 50:1 Mini Fire-Ball 225, 50:1 Fire-Ball 300, 15:1 Fire-Ball 300, 50:1
24F902	70 lb (32 kg) 120 lb (55 kg)	16F781	LD 50:1 Mini Fire-Ball 225, 50:1 Fire-Ball 300, 15:1 Fire-Ball 300, 50:1
24F903	400 lb (180 kg)	16F784	LD 50:1 Mini Fire-Ball 225, 50:1 Fire-Ball 300, 15:1 Fire-Ball 300, 50:1
220653	35 lb (16 kg)	183241	Mini Fire-Ball 225, 50:1 Fire-Ball 300, 15:1 Fire-Ball 300, 50:1
220654	70 lb (32 kg) 120 lb (55 kg)	183243	Mini Fire-Ball 225, 50:1 Fire-Ball 300, 15:1 Fire-Ball 300, 50:1
223845	400 lb (180 kg)	186463	Mini Fire-Ball 225, 50:1 Fire-Ball 300, 15:1 Fire-Ball 300, 50:1
204130	400 lb (180 kg)	-	Mini Fire-Ball 225, 50:1 Fire-Ball 300, 15:1 Fire-Ball 300, 50:1
223344	120 lb (55 kg)	183243	Fire-Ball 425, 50:1 Fire-Ball 425, 75:1
223700	120 lb (55 kg)	183243	Dyna-Star 5:1
223701	400 lb (180 kg)	186463	Dyna-Star 5:1 Fire-Ball 425 10:1
223846	400 lb (180 kg)	186463	Fire-Ball 425, 50:1 Fire-Ball 425, 75:1
205337	400 lb (180 kg)	-	Fire-Ball 425, 50:1 Fire-Ball 425, 75:1

HIGH-PRESSURE GREASE SHUT-OFF VALVE




Part Number	Description	Pressure Rating	Inlet
202869	High-pressure needle valve	5,000 psi (345 bar)	1/2 in






ORDERING OPTIONS


PORTABLE BASES

	Part Number	Description
	131183	Drum dolly, 35 lb (16 kg)
	131184	Drum dolly, 120 lb (54 kg)
	129645	Drum dolly, 400 lb (182 kg)
	203622	Caster base for 120 lb (54 kg) drums


CARTS

	Part Number	Description	Compatible Container Size
	203650	Drums fit onto recess on formed base. Rim clamps secure drum onto cart.	35 lb (16 kg) 70 lb (32 kg) 120 lb (55 kg)
	222243	Heavy-duty drum cart with pneumatic wheels	120 lb (55 kg)
	111470	Heavy-duty drum truck on roll-around base	400 lb (180 kg)

PRO-SHOT DISPENSE VALVES

	Part Number	Description
	242055	1/4 in NPT(F) inlet without coupler or extension
	242056	1/4 in NPT(F) inlet with coupler and extension 200389
	242057	3/8 in NPT(F) inlet without coupler or extension
	242058	3/8 in NPT(F) inlet with coupler and extension 200389
	224872	Includes 30 in (76.2 cm) whip hose (109148), Z-Swivel (202577), and grease valve (242056)

SWIVEL

	Part Number	Description
	202577	Z-Swivel allows non-binding movement for hard-to-reach locations, 1/4-18 NPT

GT 750 36:1 GREASE PUMPS

FEWER STROKES AND LONGER PUMP LIFE

The GT 750 pump was engineered to perform in challenging applications and changing environments. The large 7.5-inch air motor and pump lower combination allows the GT 750 pump to move the same amount of grease with up to four times fewer pump strokes.



Efficient Air Motor

Use less air to move more grease.

High Flow Rates

Up to 32 lb/min of grease.

High Volume Per Stroke

Pump more grease without having to drive pump too quickly to damage seals.

Proven Pump Technology

Based on Graco NXT™ pump technology.

Multiple Tank Options

Available in 35, 120 and 400 lb down tube lengths.


TYPICAL APPLICATIONS


- Lube trucks
- Mining
- Heavy-duty dealerships
- Fleet service facilities
- In-plant

TYPICAL FLUIDS


- Grease up to NLGI #2

PUMP PERFORMANCE

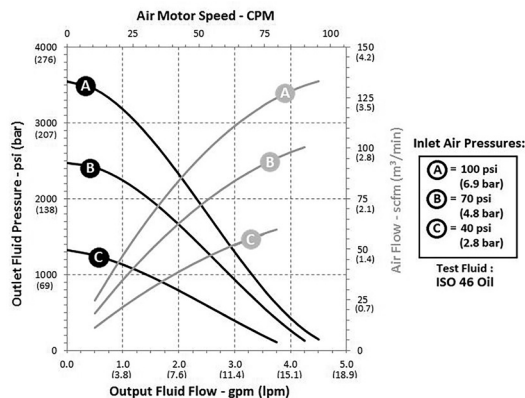





Drum Mount



Side Pocket Mount






Horizontal Mount



Top Mount


ORDERING OPTIONS

GT 750 36:1 GREASE PUMPS


	Part Number	Description
	24W498	GT 750, 36:1 Grease Pump, stubby length
	25D116	GT 750, 36:1 Grease Pump, 120 lb length
	24W337	GT 750, 36:1 Grease Pump, 400 lb length

ACCESSORIES


CAM LOCK ADAPTERS

	Part Number	Description
	131380	Male Cam Lock Adapter – 3 in
	131394	Female Cam Lock Adapter – 3 in

DRUM COVERS

	Part Number	Description
	204574	Cover for 120 lb (54 kg) drums
	200326	Cover for 400 lb (182 kg) drums
	160754	Bung Adapter Plate (used to mount pump to drum cover) – 2 in

FOLLOWER PLATES

	Part Number	Description
	223700	Follower plate for 120 lb (54 kg) drums
	223701	Follower plate for 400 lb (182 kg) drums

GREASE PUMPS AND PACKAGES

NXT CHECK-MATE® GREASE PUMPS

MOVE LARGE AMOUNTS OF GREASE FAST

Tested to outperform and outlast all other pumps on the market – with its long-life packing design and intuitive, easy-to-use controls – the NXT™ High-Flo pump is the best value for the money. Fewer parts, faster repairs, and long-lasting durability.



NXT Air Motor

Modular design for easier maintenance with rugged body armor that won't rust or dent.

Modular Air Valves

Easy-to-repair valve eliminates stalling and contains deicing controls.

Integrated Air Controls

Easy-turn, lockable regulator is front-mounted for easy access. Compact and modular with built-in filtration.

Piston Valve with Floating Piston Seal

For maximum pressure balance over a range of material viscosities.

TYPICAL APPLICATIONS

- Fleet services facilities
- In-plant
- Mining

TYPICAL FLUIDS

- Grease up to NLGI #2




PUMP PERFORMANCE

Inlet Pressures:


A = 100 psi (6.9 bar) air pressure **B** = 70 psi (4.8 bar) air pressure **C** = 40 psi (2.8 bar) air pressure

TEST FLUID: No. 10 Weight Oil


NXT 14:1 CHECK-MATE PUMPS

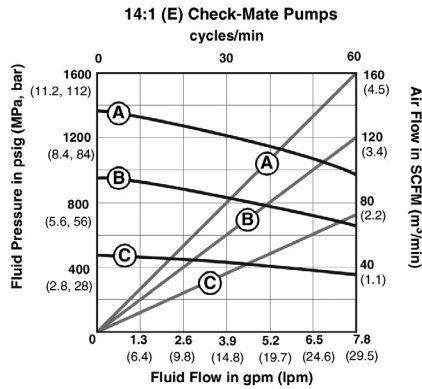

NXT 26:1 CHECK-MATE PUMPS

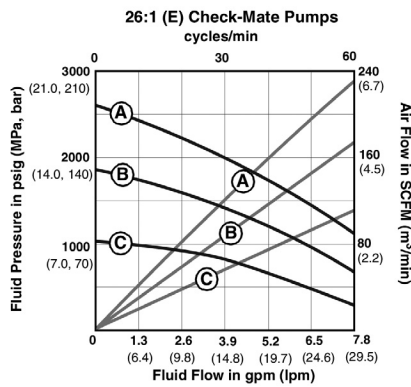

NXT 29:1 CHECK-MATE PUMPS

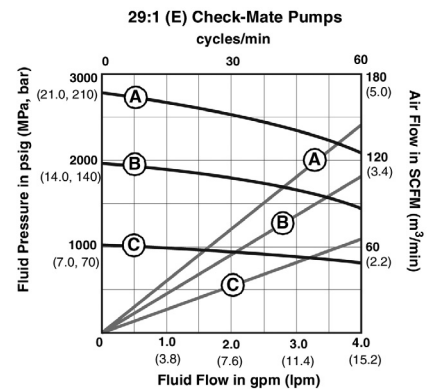

TECHNICAL SPECIFICATIONS

	NXT Check-Mate 14:1	NXT Check-Mate 26:1	NXT Check-Mate 29:1
Fluid Pressure Ratio	14:1	26:1	29:1
Air Motor	NXT 3400	NXT 6500	NXT 3400
Air Motor Effective Diameter	7.5 in (191 mm)	10.4 in (264 mm)	7.5 in (191 mm)
Pump Lower	L500CS	L500CS	L250CS
Maximum Fluid Working Pressure	1,400 psi (97 bar / 9.7 MPa)	2,600 psi (179 bar / 17.9 MPa)	2,900 psi (200 bar / 20 MPa)
Output per Cycle	15.4 oz (435 g)	15.4 oz (435 g)	7.7 oz (218 g)
Air Inlet	3/4 in NPT(F)	3/4 in NPT(F)	3/4 in NPT(F)
Fluid Outlet	1-1/2 in NPT(M)	1-1/2 in NPT(M)	1 in NPT(F)
Air Operation Range	0 psi to 100 psi (0 bar to 7 bar)	0 psi to 100 psi (0 bar to 7 bar)	0 psi to 100 psi (0 bar to 7 bar)
Max Recommended Pump Speed	20 cpm	20 cpm	20 cpm
Cycles per Pound	1.0 cpp	1.0 cpp	2.1 cpp
Cycles per Kg	2 cpk	2 cpk	5 cpk
Wetted Parts	303, 304, 316 and 17-4PH grades of stainless steel; ductile iron and carbon steel, electroless nickel plated; carbon steel, zinc and electroless nickel plated; E52100 and ETD 150 alloy steel; PTFE; UHMWPE; carbon-filled PTFE; acetal	303, 304, 316 and 17-4PH grades of stainless steel; ductile iron and carbon steel, electroless nickel plated; carbon steel, zinc and electroless nickel plated; E52100 and ETD 150 alloy steel; PTFE; UHMWPE; carbon-filled PTFE; acetal	ETD 150, 41L40, and 4140 alloy steel; 304, 316, 17-4PH and 440C grades of stainless steel; acetal; carbon-filled PTFE; carbon steel; ductile iron; electroless nickel, zinc and chrome plating; PTFE; UHMWPE
Sound Pressure Level	77 dB(A)	80 dB(A)	77 dB(A)
Sound Power Level	87 dB(A)	90 dB(A)	87 dB(A)
Approximate Weight	152 lb (69 kg)	169 lb (77 kg)	128 lb (58 kg)
Instruction Manual	System – 312863 Pump – 312376 Pump Lower – 312375 Air Motor – 311238	System – 312863 Pump – 312376 Pump Lower – 312375 Air Motor – 311238	System – 312863 Pump – 312376 Pump Lower – 312375 Air Motor – 311238

NXT CHECK-MATE® GREASE PUMPS


PUMP PERFORMANCE

Inlet Pressures:


A = 100 psi (6.9 bar) air pressure **B** = 70 psi (4.8 bar) air pressure **C** = 40 psi (2.8 bar) air pressure

TEST FLUID: No. 10 Weight Oil


NXT 55:1 CHECK-MATE PUMPS

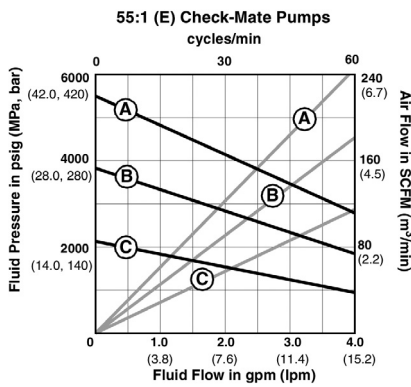

NXT 63:1 CHECK-MATE PUMPS

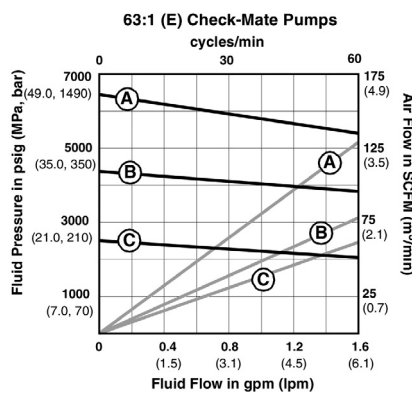

NXT 68:1 CHECK-MATE PUMPS

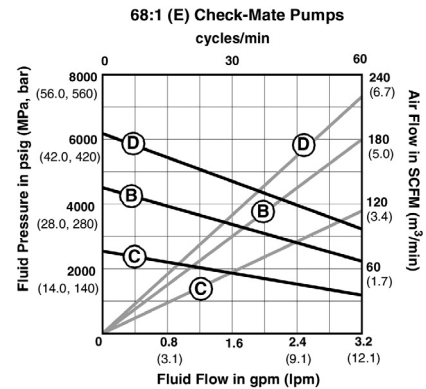

TECHNICAL SPECIFICATIONS

	NXT Check-Mate 55:1	NXT Check-Mate 63:1	NXT Check-Mate 68:1
Fluid Pressure Ratio	55:1	63:1	68:1
Air Motor	NXT 6500	NXT 3400	NXT 6500
Air Motor Effective Diameter	10.4 in (264 mm)	7.5 in (191 mm)	10.4 in (264 mm)
Pump Lower	L250CS	L100CS	L200CS
Maximum Fluid Working Pressure	5,500 psi (379 bar / 37.9 MPa)	4,500 psi (310 bar / 31 MPa)	5,300 psi (366 bar / 36.6 MPa)
Output per Cycle	7.7 oz (218 g)	3.1 oz (87 g)	6.1 oz (174 g)
Air Inlet	3/4 in NPT(F)	3/4 in NPT(F)	3/4 in NPT(F)
Fluid Outlet	1 in NPT(F)	3/4 in NPT(M)	1 in NPT(F)
Air Operation Range	0 psi to 100 psi (0 bar to 7 bar)	0 psi to 72 psi (0 bar to 4.9 bar)	0 psi to 78 psi (0 bar to 5.4 bar)
Max Recommended Pump Speed	20 cpm	20 cpm	20 cpm
Cycles per Pound	2.1 cpp	5.2 cpp	2.6 cpp
Cycles per Kg	5 cpk	11 cpk	6 cpk
Wetted Parts	ETD 150, 41L40 and 4140 alloy steel; 304 and 17-4PH grades of stainless steel; acetal; carbon-filled PTFE; CS; ductile iron; eNi, Zn and chrome plating; UHMWPE	ETD 150, 41L40 and 4140 alloy steel; 304 and 17-4PH grades of stainless steel; acetal; carbon-filled PTFE; CS; ductile iron; eNi, Zn and chrome plating; UHMWPE	ETD 150, 41L40 and 4140 alloy steel; 304, 316 and 17-4PH grades of stainless steel; acetal; carbon-filled PTFE; CS; ductile iron; eNi, Zn and chrome plating; PTFE; UHMWPE
Sound Pressure Level	80 dB(A)	87 dB(A)	80 dB(A)
Sound Power Level	90 dB(A)	87 dB(A)	90 dB(A)
Approximate Weight	145 lb (66 kg)	101 lb (46 kg)	145 lb (66 kg)
Instruction Manual	System – 312863 Pump – 312376 Pump Lower – 312375 Air Motor – 311238	System – 312863 Pump – 312376 Pump Lower – 312375 Air Motor – 311238	System – 312863 Pump – 312376 Pump Lower – 312375 Air Motor – 311238



ORDERING OPTIONS

PUMP PACKAGES

Package Number	24E006	24E007	24E008	24E009	24E010	24E011
Ratio	14:1	26:1	29:1	55:1	63:1	68:1
Pump	P14DCS	P26DCS	P29DCS	P55DCS	P63DCS	P68DCS
Mounting Type	Floor Standing	Floor Standing	Floor Standing	Floor Standing	Floor Standing	Floor Standing
Mounting Number	223952	223952	223952	223952	223952	223952
3/4 in x 6 ft Air Hose	208610	208610	208610	208610	208610	208610
1 in x 6 ft Fluid Hose	115042	244657	244657	244657	244657	244657

ACCESSORIES

DATATRAK™ CONVERSION KITS

For converting NXT air motors to include the DataTrak module with runaway protection. Refer to manual 311486 for more details.

Part Number	Description
NXT306	Conversion kit for NXT3400 motors. Use with 14:1, 29:1 and 63:1 pumps.
NXT606	Conversion kit for NXT6500 motors. Use with 26:1, 55:1 and 68:1 pumps.



GREASE PUMPS AND PACKAGES

NXT CHECK-MATE® GREASE PUMPS

ORDERING OPTIONS

RAM PUMP PACKAGES WITH DATATRAK


Package Number	247979	247980	247981
Ratio	14:1	63:1	68:1
RAM System	CM53BN	CM17BN	CM2RBN
3/4 in x 6 ft Air Hose	208610	208610	208610
1 in x 6 ft Fluid Hose	115042	244657	244657

RAM PUMP PACKAGES WITHOUT DATATRAK

Package Number	24E780	24E781	24E782
Ratio	14:1	63:1	68:1
RAM System	CM515N	CM155N	CM2L5N
3/4 in x 6 ft Air Hose	208610	208610	208610
1 in x 6 ft Fluid Hose	115042	244657	244657



SEAL KIT

	Part Number	Description
	25S071	Nitrile seal kit for 400 lb (180 kg) drums

SINGLE POST RAM FOR GREASE PAILS

Part Number	Description
CM152B	P63LCS Pump, S20c Ram on cart, 5 gal (20 L) platen



DYNA-STAR® HYDRAULIC PUMPS



FIELD-PROVEN, ENERGY-EFFICIENT

Hydraulic Dyna-Star pumps provide reliable, quiet, ice-free performance at maximum pressure and low-flow rates and are up to three times more energy efficient than comparable compressed-air systems.

Built-In Reliability

Self-lubricating vertical design for long life and reliable operation in high-vibration environments.

Quiet Hydraulic Motor

No need for add-on mufflers.

High-Efficiency Motor

Uses less hydraulic oil.

TYPICAL APPLICATIONS

- Service shops
- Heavy-duty dealerships
- Fleet services facilities
- In-plant
- Lube trucks
- Mining

TYPICAL FLUIDS

- Grease up to NLGI #280 to 5,000 SUS

TECHNICAL SPECIFICATIONS

Fluid Pressure Ratio	5:1	10:1
Pump Number	224912 – 35 lb (16 kg) 224751 – 120 lb (55 kg) 224752 – 400 lb (180 kg)	2008088 – 60 lb (27 kg) 247443 – 120 lb (55 kg) 247450 – 400 lb (180 kg)
Applications	Grease Dispensing	Grease Dispensing
Maximum Input Pressure	1,500 psi (102 bar)	600 psi (41 bar)
Maximum Fluid Input Volume	3 gpm (11.4 lpm)	3 gpm (11.4 lpm)
Maximum Output Flow Rate	4 lb/min (1.8 kg)	1.1 lb/min (0.5 kg)
Maximum Recommended CPM	60	60
Maximum Fluid Output Pressure	7,500 psi (517 bar)	7,500 psi (517 bar)
Hydraulic Supply Inlet	3/8 in NPT	3/4 to 16 in JIC (37° Flare)
Hydraulic Return Outlet	3/4 in NPT	3/4 in NPT
Fluid Outlet	1/2 in NPT	1/2 in NPT
Maximum Incoming Fluid Temp.	130°F (54°C)	200°F (93°C)
Wetted Parts	Steel, copper, polyurethane, Buna-N, polyester elastomer	Steel, copper, polyurethane, Buna-N, polyester elastomer
Sound Pressure Level	77 dB(A)	77 dB(A)
Approximate Weight	224912 – 32.5 lb (14.7 kg) 224751 – 37.5 lb (17 kg) 224752 – 42 lb (19.1 kg)	2008088 – 41 lb (18.6 kg) 247443 – 43.5 lb (19.7 kg) 247450 – 48 lb (21.8 kg)
Instruction Manual	308156	312350

DYNA-STAR® HYDRAULIC PUMPS


ORDERING OPTIONS

DYNA-STAR HYDRAULIC PUMPS


Part Number	Description
224912	5:1 Grease pump for 35 lb (16 kg) pails
224751	5:1 Grease pump for 120 lb (55 kg) drum
224752	5:1 Grease pump for 400 lb (180 kg) drum
2008088	10:1 Grease pump for 35 lb (16 kg) pails
247443	10:1 Grease pump for 120 lb (55 kg) drum
247450	10:1 Grease pump for 400 lb (180 kg) drum

ACCESSORIES

DRUM COVERS


	Part Number	Description
	224915	Cover for 35 lb (16 kg) pail
	204574	Cover for 120 lb (55 kg) drum
	200326	Cover for 400 lb (180 kg) drum

FOLLOWER PLATES


	Part Number	Description
	224916	Follower plate for 35 lb (16 kg)
	223700	Follower plate for 120 lb (55 kg)
	223701	Follower plate for 400 lb (180 kg)

HYDRAULIC FLUID CONTROLS

Required for each pump

	Part Number	Description
	236864	Dyna-Star Fluid Controls [1,500 psi (102 bar); 3 gpm (11.4 lpm)]. Includes manifold with pressure-reducing valve, flow control valve, pressure gauge, shut-off ball valves, and 3 ft (0.9 m) supply and return hoses. Instruction manual 308395.

TIE-DOWN COVERS

	Part Number	Description
	222060*	Dyna-Star, 5:1 tie-down cover for 120 lb (55 kg)
	207366**	Dyna-Star, 5:1 tie-down cover for 400 lb (180 kg)

*Use with hold-down kit 222061. **Use with hold-down kit 207361.

GREASE PUMPS AND PACKAGES



MANUALLY-OPERATED GREASE PUMPS

ORDERING OPTIONS

MANUAL DISPENSE FROM BULK CONTAINERS



Package Number	225914*	225844*	112197**	112198**
Fluids Handled	Grease	Grease	Grease	Grease
Container Size	35 lb (16 kg)	35 lb (16 kg)	35 lb (16 kg)	120 lb (55 kg)
Pump Part Number	203702	203702	-	-
Dispense Kit	203703	203703	Filler Adapter***	Filler Adapter***
Booster Gun	203697	-	-	-
Cover and Follower Plate	203701	203701	-	-
Instruction Manual	306455	306455	306436	306436




*Delivers 1/4 oz (0.7 grams) of grease per stroke at pressures to 3,000 psi (207 bar). Can service fittings directly or be used to charge a booster gun for more efficiency at higher pressures.

**Fills all three-way loading grease guns equipped with filler fittings.


***Dispense kit 203703 can be used for direct greasing applications (must be ordered separately).

GRACO DISPENSE VALVES AND GUNS SELECTION GUIDE

GREASE VALVES

	Fluid	Type	Maximum Working Pressure	Maximum Flow Rate	Intended Use	Warranty	Reference Pages
Accu-Shot™ 	NLGI #2	Metered	8,000 psi (552 bar)	2 lb/min 1 kg/min	Indoor/ Outdoor	1 year	159
Pro Shot™ 	Grease up to NLGI #2	Non-Metered	8,000 psi (552 bar)	2 lb/min 1 kg/min	Indoor/ Outdoor	1 year	160
Power Shot™ 	Grease up to NLGI #2	Booster	Supply 5,000 psi (345 bar) Output 18,000 psi (1,242 bar)	N/A	Indoor/ Outdoor	1 year	161

GREASE GUNS

	Fluid	Style	Maximum Working Pressure	Loading	Intended Use	Warranty	Reference Pages
Manual 	Grease up to NLGI #2	Lever	6,000 psi to 10,000 psi (414 bar to 690 bar)	Cartridge/ bulk fill/ loader fill/ suction	Indoor/ Outdoor	1 year	162
Pneumatic 	Grease up to NLGI #2	Pistol	6,000 psi (414 bar)	Bulk fill/ loader fill	Indoor/ Outdoor	1 year	162
Booster 	Grease up to NLGI #2	Pistol	10,000 psi (690 bar)	Loader fill	Indoor/ Outdoor	1 year	162



ACCU-SHOT™ METERED GREASE VALVE

FOR HEAVY-DUTY APPLICATIONS

Designed to perform in heavy-equipment shops, fleet maintenance shops, municipal garages and higher-volume in-plant applications with longer plumbing runs and larger fluid usage.

Battery Powered

Utilizes two standard AA alkaline batteries.

Accurate Grease Metering

± 3% accuracy with ± 1% repeatability.

Easy-to-Read LCD

Easily reset electronic display.

Handles Pressure Up to 5,000 psi (345 bar)

Flow up to 36 oz/min (1 kg/min).



TYPICAL APPLICATIONS

- Fleet services facilities
- Heavy-duty dealerships
- In-plant
- Lube trucks
- Mining

TYPICAL FLUIDS

- Grease up to NLGI #2

TECHNICAL SPECIFICATIONS

Maximum Working Pressure	5,000 psi (345 bar)
Metering System	Oval gears
Accuracy	± 3% with grease consistency (grade NLGI) 2/3
Repeatability (typical)	± 1% with grease consistency (grade NLGI) 2/3
Storage Temperature Range	-4°F to 158°F (-20°C to 170°C)
Operating Temperature Maximum	95 (%RU)
Battery	Standard alkaline batteries 2 x 1.5 Volt Size AA
Battery Life	18 to 24 months (depends on usage)
Dimensions (without extension) L x W x H	8.8 in x 1.8 in x 4.4 (22.4 cm x 4.6 cm x 11.2 cm)
Weight	2.2 lb (1.0 kg)
Warranty	One year
Instruction Manual	309454

GREASE DISPENSE VALVES AND GUNS


ORDERING OPTIONS

Part Number	Description	Includes
233807	U.S. measurement, includes extension and hydraulic coupler	Standard nozzle extension (200389) and 1/4 in NPT inlet
233933	Metric measurement, includes extension and hydraulic coupler	

PRO SHOT™ NON-METERED GREASE VALVE

FOR HEAVY-DUTY APPLICATIONS

Designed to perform in heavy-equipment shops, fleet maintenance shops, municipal garages and higher-volume in-plant applications with longer plumbing runs and larger fluid usage.

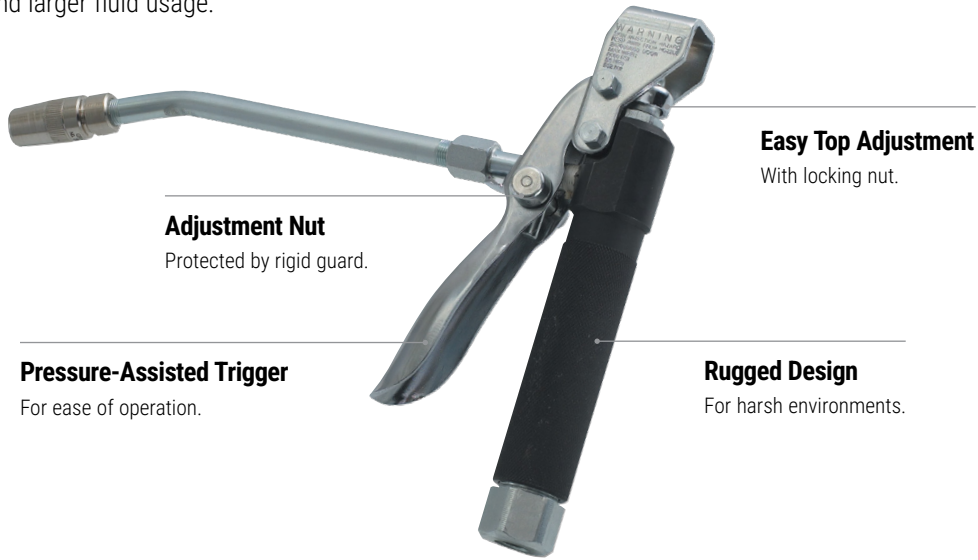

Adjustment Nut
Protected by rigid guard.

Easy Top Adjustment
With locking nut.

Pressure-Assisted Trigger
For ease of operation.

Rugged Design
For harsh environments.

TYPICAL APPLICATIONS

- Fleet services facilities
- Heavy-duty dealerships
- In-plant
- Lube trucks
- Mining

TYPICAL FLUIDS

- Grease up to NLGI #2

TECHNICAL SPECIFICATIONS

Maximum Working Pressure	8,000 psi (552 bar)
Inlet Size	1/4 in or 3/8 in
Wetted Parts	Chrome vanadium, polyurethane, brass, carbon steel, alloy steel
Warranty	One year
Instruction Manual	309032

ORDERING OPTIONS


	Description	1/4 in NPT	3/8 in NPT
	Non-metered grease valve with standard nozzle extension (200389)	242056	242058
	Bare non-metered grease valve only	242055	242057
	Non-metered grease valve package. Includes Grease Valve (242056), Z-Swivel (202577) and Whip Hose (109148).	224872	-
	Non-metered grease valve package. Includes Grease Valve (242055), coupler (200325) and Whip Hose (109145).	26C184	-



POWER SHOT™ BOOSTER VALVE

FOR HEAVY-DUTY APPLICATIONS

Designed to perform in heavy-equipment shops, fleet maintenance shops, municipal garages and higher-volume in-plant applications with longer plumbing runs and larger fluid usage.

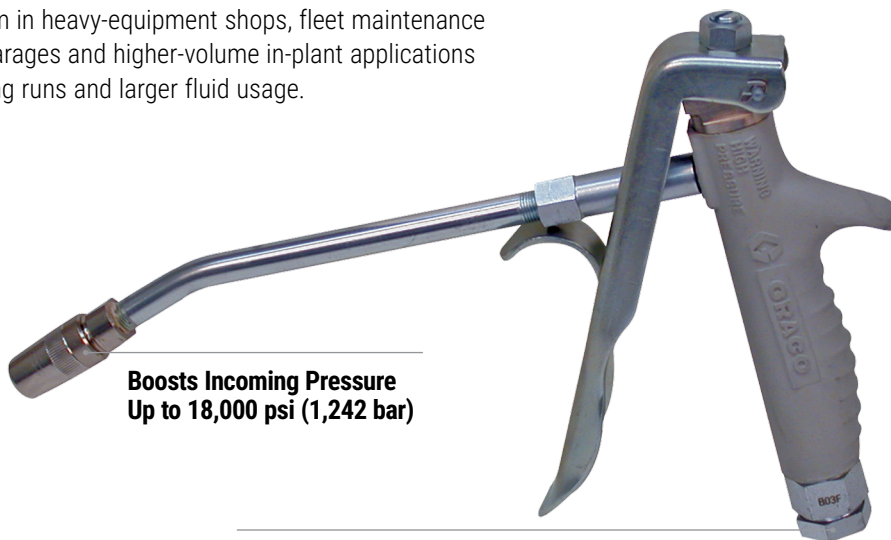

**Boosts Incoming Pressure
Up to 18,000 psi (1,242 bar)**

**Maximum Inlet Pressure
of 5,000 psi (345 bar)**

GREASE DISPENSE VALVES AND GUNS

TYPICAL APPLICATIONS

- Fleet services facilities
- Heavy-duty dealerships
- In-plant
- Lube trucks
- Mining

TYPICAL FLUIDS

- Grease up to NLGI #2

TECHNICAL SPECIFICATIONS

Maximum Input Pressure	5,000 psi (34 MPa, 345 bar)
Maximum Delivery Pressure	Up to 18,000 psi (124 MPa, 1241 bar)
Inlet Size	1/8 NPT female
Wetted Parts	Alloy steel, carbon steel, chrome alloy, copper, leather
Weight	3 lb (1.4 kg)
Height	7 in (178 mm)
Length	11.675 in (296 mm)
Warranty	One year
Instruction Manual	306271

ORDERING OPTIONS

Part Number	Description
202600	1/8 NPT(F) Power Shot booster Valve. Includes nozzle (200389)


ACCESSORIES

Part Number	Description
202579	Hose swivel (must be ordered separately)

HEAVY-DUTY GREASE GUNS

LEVER-ACTION AND PISTOL-STYLE GREASE DISPENSING GUNS

Durable design for years of trouble-free use in demanding environments. Reduces downtime and is easy to load – two- or three-way loading capability makes it easy to keep on greasing.

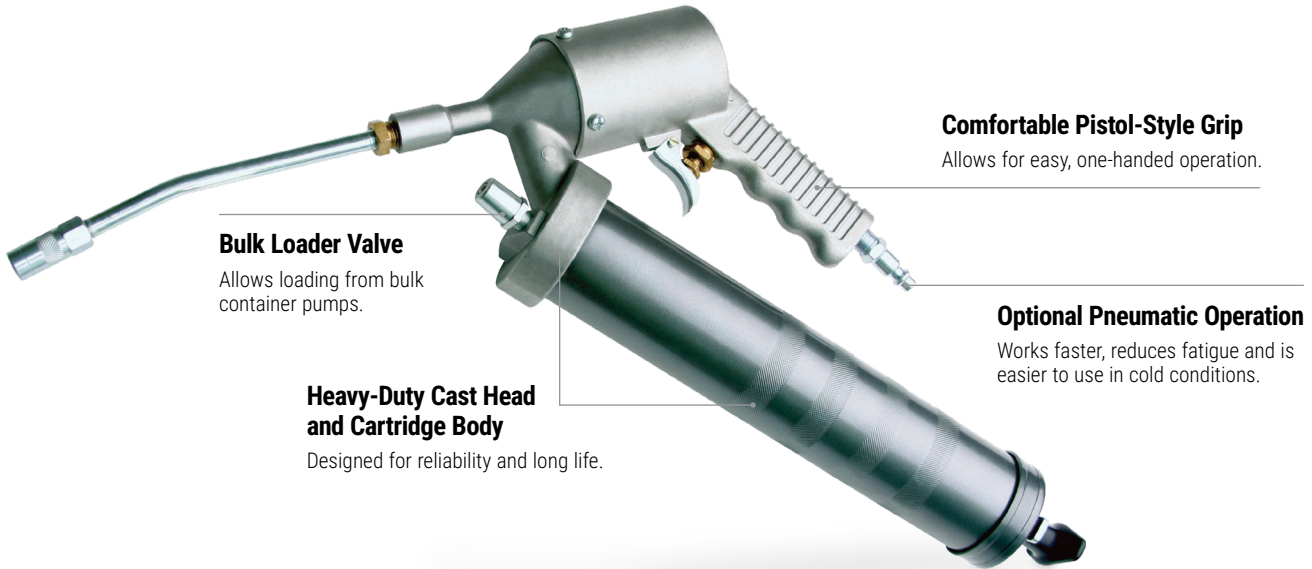

ORDERING OPTIONS


	Part Number	Style	Gun Type	Pressure psi (bar)	Loading	Includes
	112196	Pneumatic	Pistol	6,000 (414)	Bulk fill/ loader fill	Rigid extension and hydraulic coupler
	203697	Booster	Pistol	10,000 (690)	Loader fill	Rigid extension
	110218	Manual	Lever	6,000 (414)	Cartridge/ bulk fill	Rigid extension and hydraulic coupler
	110216					Rigid extension, hydraulic coupler and air bleeder valve
	110203		Pistol	10,000 (690)	Cartridge/ bulk fill/ loader fill	Rigid extension, hydraulic coupler and air bleeder valve
	110202					12 in (30.4 cm) flexible extension, hydraulic coupler and air bleeder valve
	110201		Suction	–	Suction	12 in (30.4 cm) clear plastic hose




ACCESSORIES

ORDERING OPTIONS


Z-SWIVELS

	Maximum Working Pressure psi (bar)	Inlet	Outlet	Thread	Part Number
	6,500 (450)	1/8 in	1/4 in	NPT	202579
	6,500 (450)	1/4 in	1/4 in	NPT	202577
	6,500 (450)	3/8 in	3/8 in	NPT	224569
	6,000 (414)	1/2 in	1/2 in	NPT	207948

STRAIGHT SWIVELS

	Maximum Working Pressure psi (bar)	NPT		Part Number
		Inlet	Outlet	
	8,000 (500)	1/8 in	1/8 in	204082
	8,000 (500)	1/4 in	1/8 in	204083
	8,000 (500)	1/4 in	1/4 in	204084
	6,000 (414)	1/2 in	1/2 in	207947
	5,000 (345)	3/8 in	1/2 in	214926
5,000 (345)	1/2 in	1/2 in	207946	

360° SWIVELS

	Part Number	Includes	
		Fitting	Coupler
	203597	203198	200325
203198	203198	-	

NOZZLES

Part Number	Description
200389	Standard nozzle. Includes straight 6 in (15.2 cm), 1/8 NPT(M) extension tube (197471) and tapered nose coupler (200325).
204072	Swivel nozzle. Includes straight 6 in (15.2 cm), 1/8 NPT(M) extension tube (197471) and tapered nose coupler (200325). Coupler has 360° swivel adapter (203198) for added convenience.
204897	Swivel nozzle. Includes straight 12 in (30.4 cm), 1/8 NPT(M) extension tube (155836) and tapered nose coupler (200325). Coupler has 360° swivel adapter (203198) for added convenience.
204204*	Flexible 12 in (30.4 cm) hose nozzle. 1/8 NPT(M) includes tapered-nose coupler (200325).
203504*	Flexible 12 in (30.4 cm) hose nozzle. 1/8 NPT(M) includes tapered-nose coupler (200325) and lock-sleeve connector (203497) for quick connection to any grease nozzle having tapered-nose coupler.
109145	12 in (30.4 cm) hose nozzle without coupler.
112255	18 in (45.8 cm) hose nozzle without coupler.
109148*	30 in (76.2 cm) hose nozzle without coupler, has 1/8 NPT(M) both ends. Use as alternate for rigid nozzle with tapered-nose coupler 200325.



ACCESSORIES

ORDERING OPTIONS

COUPLERS

Part Number	Description
200325	1/8 NPT(F) inlet standard tapered-nose coupler. Hardened jaws grip grease fittings through wide-sealing angle, but release easily. Maximum working pressure 8,000 psi (551 bar).
202650	1/8 NPT(F) inlet standard straight-nose grease coupler for manual operated grease guns only. Maximum working pressure 3,000 psi (206 bar).
200021	1/8 NPT(F) inlet giant button-head coupler. Gives fast, positive seal on larger button-head fittings.



200325

ADAPTERS

Adapters have lock-sleeve quick-connector; works with any grease nozzle with a tapered-nose coupler.

Part Number	Description
201881	Hydraulic-to-push adapter. Used for U-joints and low-pressure service.
205532	Hydraulic-to-steel needle adapter. Used for flush fittings. 250 psi (17 bar) max. Not for air grease applications or guns.
205582	Hydraulic-to-nylon needle adapter. Used for removable plugs. 250 psi (17 bar) max. Not for air grease applications or guns.
223187	90° hydraulic-to-push adapter (K-car). Refer to instruction manual 306708.
203497	Lock-sleeve connector. 1/8 NPT(F) outlet. Allows for quick connection to tapered-nose coupler. Inlet is standard grease fitting with sleeve to lock connector in place.
236171	Easy-fill valve. For faster loading of Graco hand grease guns with gun loaders. Replaces hydraulic fittings on all grease guns with 1/8 NPT(F).
204929	Grease loader valve. For use with lever-operated, high-volume grease pumps. Permits quick bulk filling of hand-operated grease lever guns equipped with easy-fill valve 236171.
205592	Hydraulic adapter assortment package. Contains needle adapter (205568), plug adapter (205554), push adapter (201881), nylon needle adapter (205582), hydraulic-to-steel needle adapter (205532) and whip hose nozzle connector (203504).



205532



205582



205592

TAPERED THREAD GREASE FITTINGS, 10,000 PSI (690 BAR) (STEEL; BALL CHECK)

Part Number	Shank	Description
100054	9/32	1/8 NPT straight
101277	1-9/32	1/8 NPT straight
100970	9/32	1/8 NPT 30° angle
100834	9/32	1/8 NPT 45° angle
100971	9/32	1/8 NPT 65° angle
100833	9/32	1/8 NPT 90° angle
100848	3/8	1/4 NPT 67° angle
100846	3/16	1/4-28 tapered SAE-LT straight
100847	13/64	1/4-28 tapered SAE-LT 45° angle
101283	3/16	1/4-28 tapered SAE-LT 90° angle
101281	11/32	1/4-28 tapered SAE-LT straight
110702	19/64	1/4-28 tapered SAE-LT 65° angle
100835	12/32	1/4 NPT straight



100054



100970



100834



100833



100848



ORDERING OPTIONS

1/4 IN TAPERED THREAD-FORMING GREASE FITTINGS, 10,000 PSI (690 BAR) (STEEL; BALL CHECK)

Part Number	Shank	Description
110703	13/64	1/4-28 straight
110705	13/64	1/4-28 90° angle

DRIVE-TYPE GREASE FITTINGS (STEEL)

Part Number	Shank	Description
110706	3/32	3/16 drill straight
110709	7/32	3/16 drill 65° angle
110713	1/4	3/16 drill straight without ball check
101312	7/32	3/16 drill straight with ball check
110710	1/4	5/16 drill straight with ball check
101287	17/64	1/4 drill straight without ball check



101287

STANDARD BUTTON-HEAD GREASE FITTING (STEEL)

Part Number	Shank	Description
110711	35/64	1/2 NPT straight

GIANT BUTTON-HEAD GREASE FITTING (STEEL)

Part Number	Shank	Description
100854	1/2	1/4 NPT straight

EASY-OUTS

Part Number	Description
101604	3/8 NPT straight
101605	1/4 NPT straight



101604

GREASE ACCESSORY PACKAGES


Convenient storage box contains the following threaded fittings in the quantities listed:

Part Number	Package Includes			
	Quantity	Grease Fitting No.	Shank	Description
202654	30	100054	9/32	1/8 NPT straight
	10	100970	9/32	1/8 NPT 30° angle
	10	100833	9/32	1/8 NPT 90° angle
	20	100846	3/16	1/4-28 straight
	10	100847	13/64	1/4-28 45° angle



202654

DIESEL EXHAUST FLUID (DEF) SYSTEMS

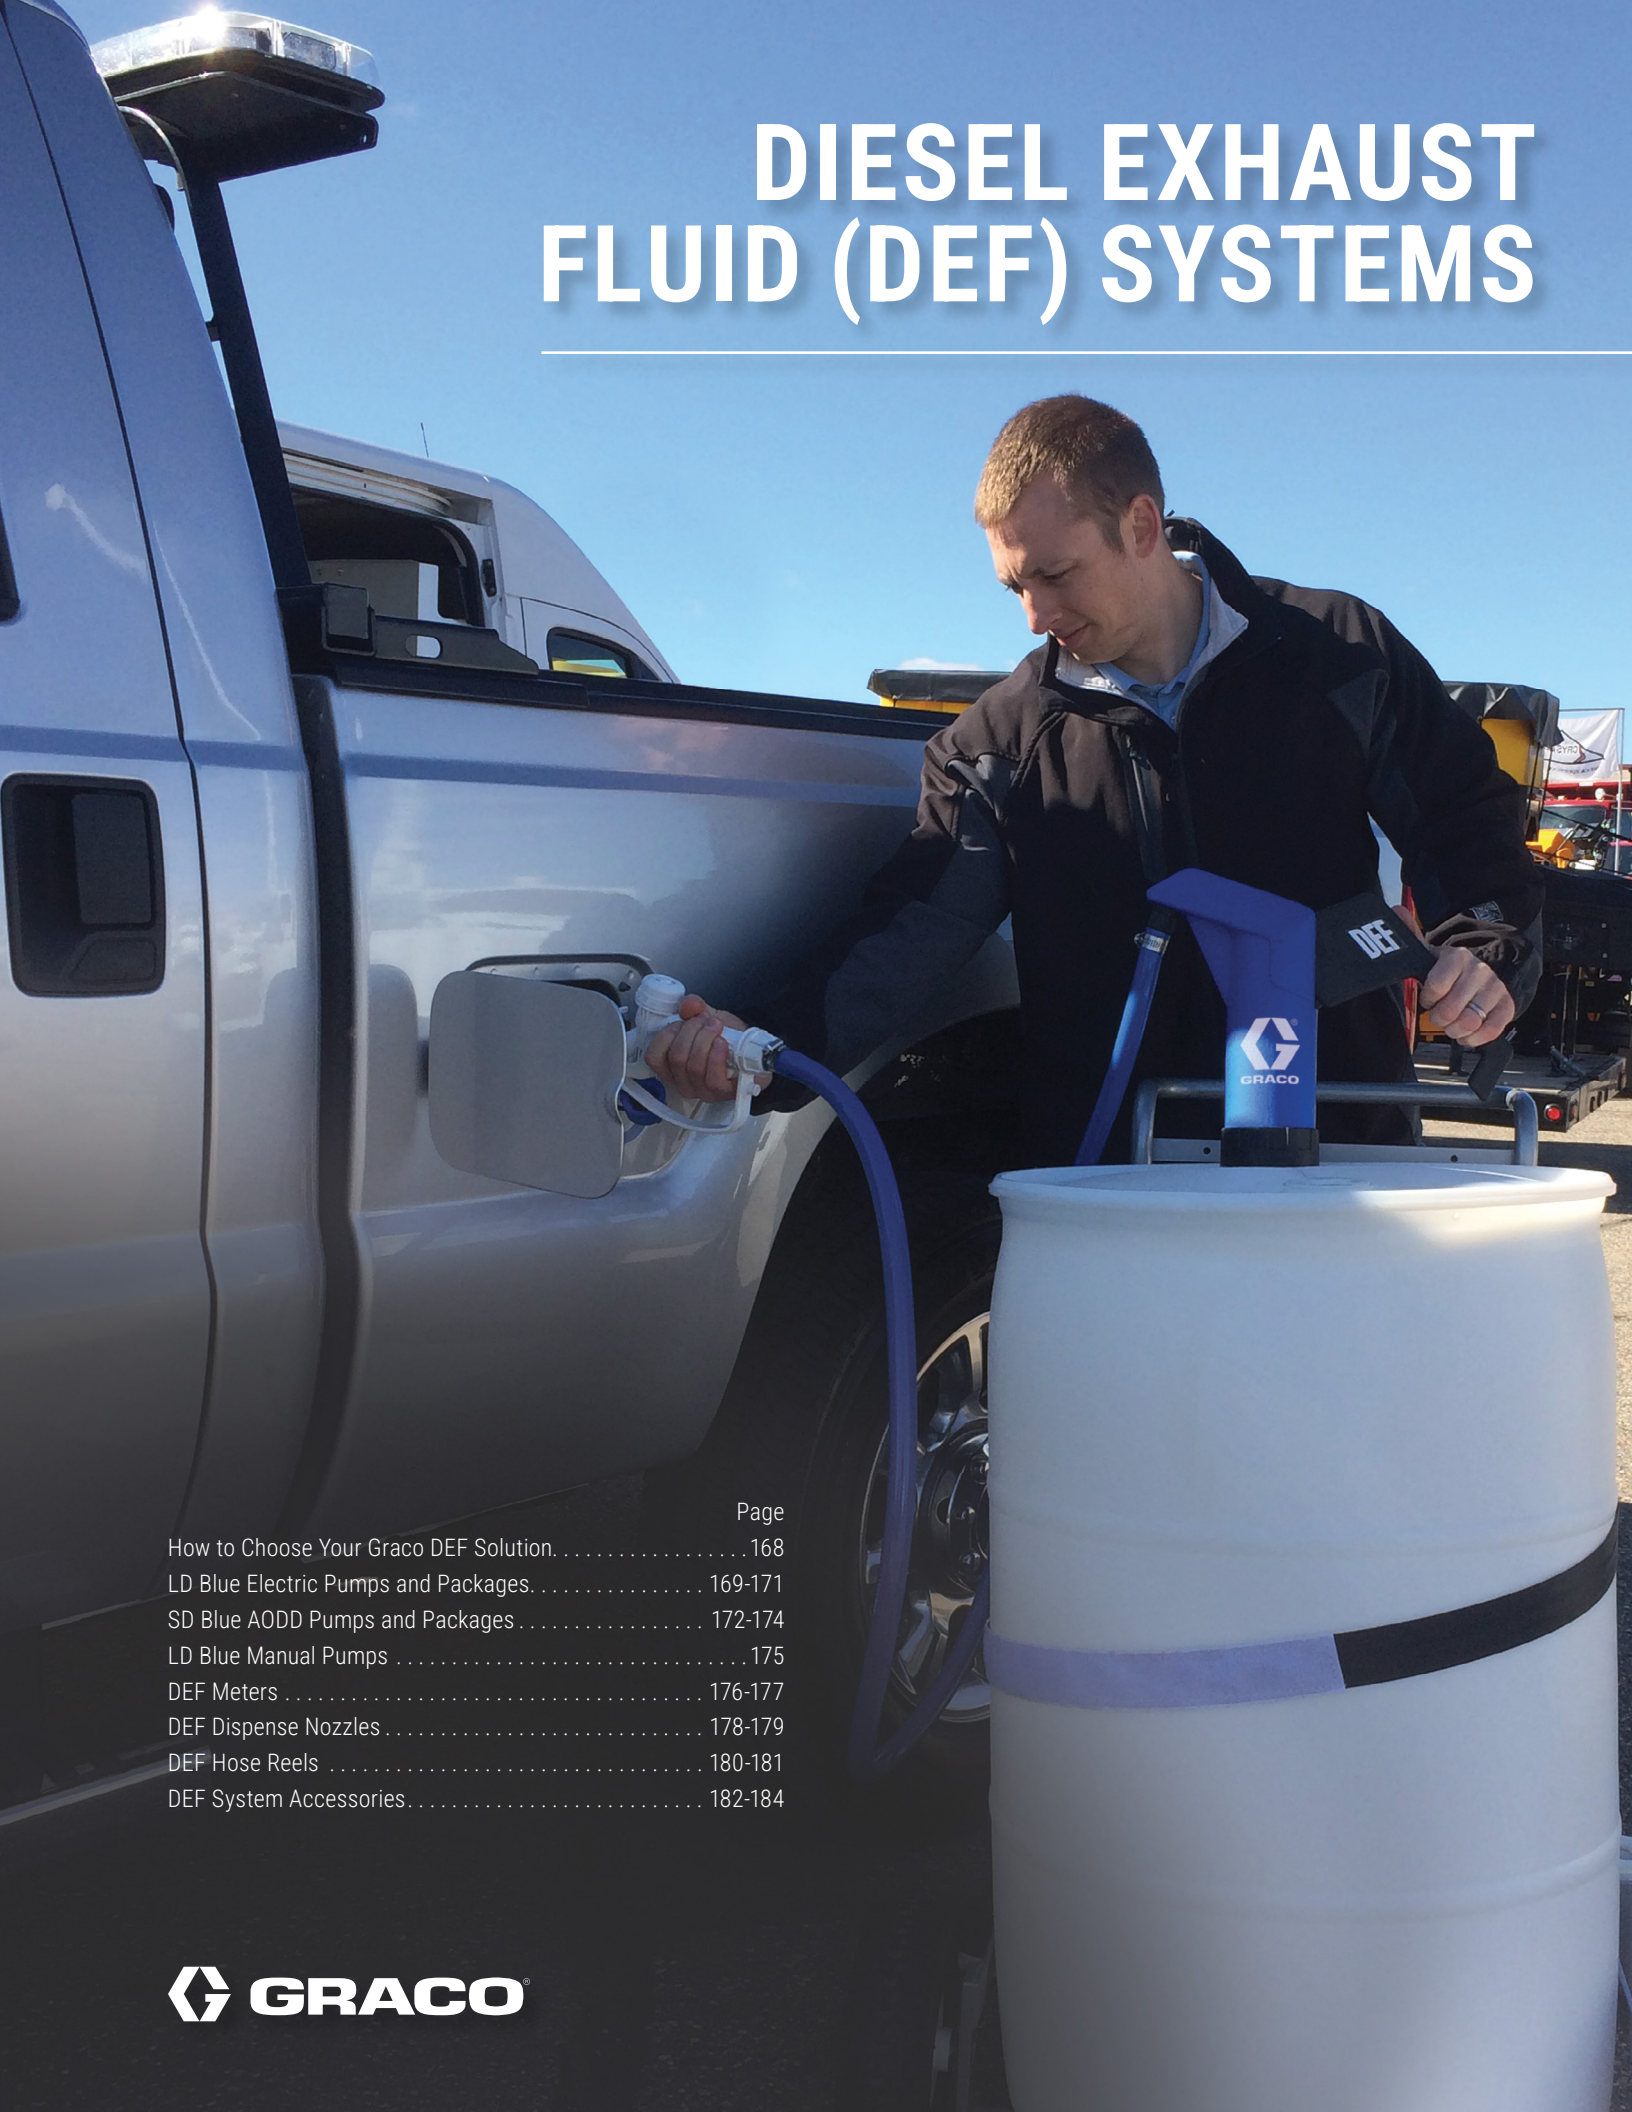

	Page
How to Choose Your Graco DEF Solution.....	168
LD Blue Electric Pumps and Packages.....	169-171
SD Blue AODD Pumps and Packages.....	172-174
LD Blue Manual Pumps.....	175
DEF Meters.....	176-177
DEF Dispense Nozzles.....	178-179
DEF Hose Reels.....	180-181
DEF System Accessories.....	182-184

DIESEL EXHAUST FLUID (DEF) SYSTEMS

FLEXIBLE INSTALLATION – SOLUTIONS FOR EVERY APPLICATION

Choose from configured packages or build a custom DEF system specific to your application with individual pumps and components. From the economical hand pumps to the high-performance electric or air-operated double diaphragm (AODD) packages, Graco has you covered. Every solution is designed with the highest-quality components for trouble-free operation.



Tote Mount



Drum Mount



Wall Mount

HOW TO CHOOSE YOUR GRACO DEF SOLUTION

A IDENTIFY YOUR POWER SUPPLY

Choose the pump that's right for your application. Choose the lightweight and reliable manual hand pump for small applications. The LD Blue electric pumps are recommended for applications up to 50 ft, or upgrade to the SD Blue AODD pump for longer applications, up to 200 ft.



B DETERMINE YOUR CONTAINER SIZE*

Whether dispensing from a drum or a tote container, Graco has the package that fits your needs. Fifty-five gallon drums are ideal for one or two truck operations, and for larger fleets choose 275 or 330 gallon IBC totes.

*Tote and drum not for sale from Graco

C CHOOSE YOUR ACCESSORIES

Graco offers a full line of high-quality DEF accessories to complement your installation. Select from automatic or manual dispense nozzles, closed-system couplers, in-line meters, hose reels, mounting brackets, fittings, and dispense and suction hoses.





LD BLUE ELECTRIC PUMPS

A RELIABLE INDUSTRIAL PUMP WITH SELF-PRIMING CAPABILITIES

Whether you own a small garage, large dealership or heavy equipment maintenance facility, Graco has a complete line of diesel exhaust fluid (DEF) products for every application. Our electric, pneumatic or manual products are engineered specifically for the advanced needs of DEF fluid and are designed to minimize downtime and dispense materials quickly without compromising chemical integrity.

Built-In Safety and Reliability

- Automatic shut-off timer (6.5 min) incorporated into the 120V pump.
- Prevents the pump from running past the duty cycle and maximizes the life of the pump.

Stay Up and Running Longer

Reduce downtime and get more work done with the LD Blue systems – up to twice the life of competitive pumps.



Reduced Maintenance

Features a self-priming membrane pump that has no need for a dynamic seal, reducing the need for maintenance.

TYPICAL APPLICATIONS

- Automotive and heavy-duty dealerships
- Agriculture
- Service and fast lube centers
- Fleet service facilities

TYPICAL FLUIDS

- Diesel exhaust fluid

ORDERING OPTIONS

PUMP ONLY

Part Number	Description
127642	120V AC electric pump, 3/4 in barbed hose tail
127643	12V DC electric pump, 3/4 in barbed hose tail

TECHNICAL SPECIFICATIONS

	120V	12V
Maximum Flow Rate	9 gpm	9.5 gpm
Maximum Fluid Pressure	50 psi	50 psi
RPM	1,750	2,600
Watts	500	260
Voltage	120V / 60hz	12V
Maximum Amperage	4.5A	22A
Duty Cycle	20 min ON/OFF	20 min ON/OFF
Listings	cETLus	CE

LD BLUE ELECTRIC PUMP PACKAGES

ORDERING OPTIONS

LD BLUE ELECTRIC PUMP PACKAGES



Package Number	26C172	26C175	26C173	26C174
Mount Type	Tote	Tote	Tote	Tote
Voltage	12 VDC	120 VAC	12 VDC	120 VAC
Type of Nozzle	Automatic	Automatic	Automatic	Automatic
Nozzle	127655	127655	127655	127655
Pump	127643	127642	127643	127642
Bracket	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Meter	127873	127873	-	-
1 in Elbow Fitting	127656	127656	-	-
Dispense Hose	127680	127680	127680	127680
Dispense Hose Length	20 ft	20 ft	20 ft	20 ft
Suction Hose	127679	127679	127679	127679
Suction Hose Length	5 ft	5 ft	5 ft	2 ft
Fittings (2)	SST clamps	SST clamps	SST clamps	SST clamps

DIESEL EXHAUST FLUID (DEF) SYSTEMS



ORDERING OPTIONS

LD BLUE ELECTRIC PUMP PACKAGES



Package Number	24V641	24V644	24V645	24V656	24V646
Mount Type	Tote	Tote	Tote	Drum	Tote
Voltage	120V	120V	120V	120V	12V
Type of Nozzle	Automatic	Manual	Automatic	Automatic	Automatic
Nozzle	127649	125078	127649	127649	127649
Pump	127642	127642	127642	127642	127643
Bracket	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Meter	127663	-	-	-	127663
1 in Elbow Fitting	127656	-	-	-	127656
Dispense Hose	24W161	24W161	24W161	24W161	24W161
Dispense Hose Length	20 ft	20 ft	20 ft	20 ft	20 ft
Suction Hose Length	5 ft	5 ft	5 ft	5 ft	5 ft
Fittings (2)	SST clamps	SST clamps	SST clamps	SST clamps	SST clamps

DIESEL EXHAUST FLUID (DEF) SYSTEMS



Package 24V646 installed on tote
(not included in package).



Package 24V656 installed on 55 gallon drum
(not included in package).

SD BLUE HUSKY 515 PUMP

SUPERIOR-PERFORMING AODD PUMP CAPABLE OF HIGHER OUTPUT OVER LONGER RUNS

Whether for a small garage, large dealership or heavy equipment maintenance facility, our pneumatic pumps are engineered specifically for the advanced needs of DE fluid and are designed to minimize downtime and dispense materials quickly without compromising chemical integrity.

Modular Air Valve

Stall-free, low-pulsation air valve provides smooth and rapid changeover for increased efficiency and minimizes downtime.

Robust Design

Bolt-through fluid cover design eliminates leaks and provides better safety and more reliability.

Versatility

The Husky 515 pump delivers up to 15 gpm and works on as little as 30 psi.

Rugged Construction

Resists corrosion for reliable performance and long life.



TYPICAL APPLICATIONS

- Automotive and heavy-duty dealerships
- Mining
- Service and fast lube centers
- Fleet service facilities
- In-plant
- Lube trucks

TYPICAL FLUIDS

- Diesel exhaust fluid

TECHNICAL SPECIFICATIONS

Maximum Flow Rate	15 gpm
Maximum Fluid Pressure	50 psi
Air Operating Range	30-50 psi
Air Inlet	1/4 in NPT(F)
Pump Inlet	3/4 in BSPP(F)
Hose Inlet	3/4 in BSPP(F)
Pump Outlet	3/4 in BSPP(F)
Maximum Air Consumption	28 scfm

ORDERING OPTIONS

Part Number	Description	Inlet/Outlet
24G745	SD Blue Husky 515 pump	3/4 in BSPP



SD BLUE PUMP PACKAGES

ORDERING OPTIONS

SD BLUE PUMP TOTE PACKAGES



	Deluxe		Standard	
Package Number	24F531	24F878	24V677	24V678
Mount Type	Tote/Wall	Tote/Wall	Tote/Wall	Tote/Wall
Type of Nozzle	Automatic	Automatic	Automatic	Automatic
Air-Operated Pump	24G745	24G745	24G745	24G745
Mounting Bracket	24F870	24F870	24W186	24W186
Valve/Nozzle	24F529	24F529	127649	127649
Meter	24G738	-	127663	-
Drum Quick Connect Kit	24F532	24F532	-	-
Air Regulator and Gauge	110147	110147	-	-
Air Shut-Off Ball Valve, Vented	110223	110223	-	-
50 psi Air Safety Valve	124963	124963	116306	116306
Dispense Hose	124603	124603	24W161	24W161
Dispense Hose Length	20 ft	20 ft	20 ft	20 ft
Suction Hose	124581	124581	24W149	24W149
Suction Hose Length	6 ft	6 ft	5 ft	5 ft
Fittings (2)	3/4 in BSPP(MBE)	3/4 in BSPP(MBE)	SST Clamps	SST Clamps

DIESEL EXHAUST FLUID (DEF) SYSTEMS

Package 24V677 installed on a 275 gallon tote (tote and coupler not included in package).



SD BLUE PUMP PACKAGES

ORDERING OPTIONS

SD BLUE PUMP DRUM PACKAGES



	Deluxe		Standard	
Package Number	24F947	24M499	24V679	24V686
Mount Type	Drum	Drum	Drum	Drum
Type of Nozzle	Manual	Automatic	Manual	Automatic
Air-Operated Pump	24G745	24G745	24G745	24G745
Mounting Bracket	24F679	24F679	24W185	24W185
Valve/Nozzle	125078	24F529	125078	127649
Meter	-	24H293	-	127663
Drum Quick Connect Kit	24F532	24F532	-	-
Air Regulator and Gauge	110147	110147	-	-
Air Shut-Off Ball Valve, Vented	110223	110223	-	-
50 psi Air Safety Valve	124963	124963	116306	116306
Dispense Hose	125079	124671	24W154	24W154
Dispense Hose Length	12 ft	12 ft	12 ft	12 ft
Suction Hose	124875	124875	24W148	24W148
Suction Hose Length	2 ft	2 ft	2 ft	2 ft
Fittings (2)	3/4 in BSPP(M)	3/4 in BSPP(M)	SST Clamps	SST Clamps

DIESEL EXHAUST FLUID (DEF) SYSTEMS



LD BLUE MANUAL PUMPS



Features and Benefits

- Lightweight, reliable and cost-effective solution for dispensing DEF from 55 gallon drums
- Quick drum installation and change-out with integrated 2 inch bung adapter
- Fast delivery capable of 11 oz per stroke
- Adjustable telescoping downtube

TYPICAL APPLICATIONS

- Automotive and heavy-duty dealerships
- Agriculture
- Service and fast lube centers
- Fleet service facilities
- In-plant

TYPICAL FLUIDS

- Diesel exhaust fluid

TECHNICAL SPECIFICATIONS

Maximum Flow Rate	11 oz per stroke
-------------------	------------------

ORDERING OPTIONS

Part Number	Description
127647	DEF hand pump with drum-length adjustable downtube (125479)
24G636	DEF hand pump (127647), 6 ft dispense hose with ball valve (125478), drum length adjustable downtube (125479)
127875	DEF hand pump (127647), 6 ft dispense hose with ball valve (125478), drum length adjustable downtube (125479), LD manual nozzle (125078)

ACCESSORIES

Part Number	Description
125479	Drum length adjustable downtube for hand pump

DIESEL EXHAUST FLUID (DEF) SYSTEMS

SDI15 IN-LINE METER



Features and Benefits

- Tracks totals in two modes – reset for periodic history and non-reset for meter life
- Durable design for rugged use
- Easy to use – dispenses pints, quarts, liters or gallons
- 0.5 gpm to 15 gpm flow rate
- 1500 psi maximum pressure, 1/2 in NPT inlet

TECHNICAL SPECIFICATIONS

Flow Range	0.5 gpm to 15 gpm (1.9 lpm to 57 lpm)
Maximum Working Pressure	1,500 psi (103 bar)
Units of Measure	Quarts, pints, gallons, liters (factory-set to quarts)
Weight	1.8 lb (0.8 kg)
Accuracy	± 2.5%
Inlet/Outlet	1/2 in BSPP
Maximum Totalizer	99,999
Maximum Recorded Dispense	999.99
Operating Temperature Range	-4°F to 122°F (-20°C to 50°C)
Storage Temperature Range	-13°F to 122°F (-25°C to 50°C)
Outdoor Use	No
Battery	2 AA alkaline
Wetted Parts	Stainless steel, PBT (polybutylene terephthalate), nickel, fluoroelastomer
Meter Pressure Loss	22 psi (1.5 bar) @ 14 gpm (53 lpm)
Instruction Manual	313048

TYPICAL APPLICATIONS

- Automotive and heavy-duty dealerships
- Mining
- Service and fast lube centers
- Fleet service facilities
- In-plant
- Lube trucks

TYPICAL FLUIDS

- Diesel exhaust fluid

ORDERING OPTIONS

Part Number	Description
24G738	SDI15 DEF meter, 1/2 in BSPP(F/F), 1,500 psi, 0.5 to 15 gpm
24H293	SDI15 meter kit with fittings for SST auto nozzle. Includes SDI15 Meter (24G738), Swivel (124964), Nipple Fitting (24H292), Adapter Fitting (16G760) and Elastomeric Seal (124965).



LD BLUE IN-LINE METER



Features and Benefits

- Easy to install – use in-line or at the end of the dispense hose
- Impulse signals – single channel or reed switch
- 1.3 gpm to 26.4 gpm flow rate
- Rotatable display – 4 positions
- 1 in BSPP(M) inlet and outlet. Includes 1 in BSPP(F) coupler.

TECHNICAL SPECIFICATIONS

Flow Range	1.3 gpm to 26.4 gpm (4.9 lpm to 100 lpm)
Maximum Working Pressure	145 psi (10 bar)
Units of Measure	Quarts, pints, gallons, liters (factory-set to quarts)
Weight	0.6 lb (0.25 kg)
Accuracy	± 1.0%
Inlet/Outlet	1 in BSPP(M)
Maximum Totalizer	99,999
Maximum Recorded Dispense	999.99
Operating Temperature Range	14°F to 122°F (-10°C to 50°C)
Storage Temperature Range	-4°F to 158°F (-20°C to 70°C)
Outdoor Use	No
Battery	2AAA alkaline
Wetted Parts	SST, plastic, rubber
Meter Pressure Loss	5 psi (0.3 bar) @ 26.4 gpm (100 lpm)
Instruction Manual	333467

TYPICAL APPLICATIONS

- Automotive and heavy-duty dealerships
- Service and fast lube centers
- Fleet service facilities
- In-plant


TYPICAL FLUIDS

- Diesel exhaust fluid

ORDERING OPTIONS

Part Number	Description
127663	LD digital in-line turbine meter, LCD display

ACCESSORIES

	Part Number	Description
	127800	Adapter – SD auto nozzle connection to LD meter

LD BLUE AUTOMATIC NOZZLES



Features and Benefits

- Easy break-away system for low-cost repairs if the spout becomes detached
- Choose with or without built-in meter
- 4 gpm to 12 gpm flow rate
- 50 psi maximum pressure
- Optional mis-filling system to prevent mis-fills
- Stainless steel spout

TECHNICAL SPECIFICATIONS

	Automatic Shut-Off Nozzle	Automatic Shut-Off Nozzle with Meter
Flow Range	4 gpm to 12 gpm (15 lpm to 45 lpm)	4 gpm to 12 gpm (15 lpm to 45 lpm)
Maximum Working Pressure	50 psi (3.5 bar)	50 psi (3.5 bar)
Units of Measure	-	Quarts, pints, gallons, liters (factory-set to quarts)
Weight	1.3 lb (0.6 kg)	1.8 lb (0.8 kg)
Accuracy	-	± 1%
Inlet	1 in BSP or 3/4 in hose barb	1 in BSP or 3/4 in hose barb
Maximum Totalizer	-	999,999
Maximum Recorded Dispense	-	99,999
Operating Temperature Range	-4°F to 130°F (-20°C to 55°C)	14°F to 122°F (-10°C to 50°C)
Storage Temperature Range	-40°F to 140°F (-40°C to 60°C)	-4°F to 158°F (-20°C to 70°C)
Outdoor Use	Yes	No
Battery	-	2AA alkaline
Wetted Parts	SST, rubber, plastic	SST, rubber, plastic
Meter Pressure Loss	13 psi (0.9 bar) @ 9.3 gpm (35 lpm)	13 psi (0.9 bar) @ 9.3 gpm (35 lpm)
Instruction Manual	333468	333469

TYPICAL APPLICATIONS

- Automotive and heavy-duty dealerships
- Service and fast lube centers
- Fleet service facilities
- In-plant




TYPICAL FLUIDS

- Diesel exhaust fluid

ORDERING OPTIONS

Part Number	Description
127649	LD automatic nozzle with stainless steel breakaway spout
127650	LD automatic nozzle with built-in electronic turbine meter, with stainless steel breakaway spout

ACCESSORIES

	Part Number	Description
	127651	Spout replacement kit for LD nozzles 127649 and 127650
	127652	Magnetic mis-fill spout kit for LD automatic nozzles
	127654	Magnetic adapter for mis-fill kit



SD BLUE NOZZLE



Features and Benefits

- Heavy-duty design
- Automatic shut-off valve with stainless steel nozzle
- 11 gpm flow rate
- 50 psi maximum pressure
- 3/4 in BSPP inlet

TYPICAL APPLICATIONS

- Automotive and heavy-duty dealerships
- Mining
- Service and fast lube centers
- Fleet service facilities
- In-plant
- Lube trucks

TYPICAL FLUIDS

- Diesel exhaust fluid

ORDERING OPTIONS

Part Number	Description
124398	SD automatic shut-off SST nozzle without swivel, 3/4 in BSPP(F)
24F529	SD automatic shut-off SST nozzle with swivel, 3/4 in BSPP(F)
127655	SD automatic shut-off SST nozzle, 3/4 in hose barb

DIESEL EXHAUST FLUID (DEF) SYSTEMS

LD BLUE MANUAL NOZZLE

Features and Benefits

- Manual shut-off valve with stainless steel nozzle
- High 20 gpm flow rate
- 50 psi maximum pressure
- 3/4 in BSPP inlet
- Lightweight – under 1 lb

TYPICAL APPLICATIONS

- Automotive and heavy-duty dealerships
- Service and fast lube centers
- Fleet service facilities
- In-plant

TYPICAL FLUIDS

- Diesel exhaust fluid

ORDERING OPTIONS

Part Number	Description
125078	LD manual DEF nozzle with SST spout



LDX DEF HOSE REELS



Features and Benefits

- For use with SD and LD pumps (LD pump with manual nozzle only)
- Stainless steel fluid section with open porting ensures high fluid flow with minimal pressure loss
- Flexible positioning of guide arm for mounting on bench, overhead, wall, tote or utility truck
- 150 psi maximum pressure
- 1/2 in x 45 ft inlet hose with 1/2 in BSPT(M) swivel connection to provide leak-free connection

TYPICAL APPLICATIONS

- Small maintenance shops
- Tire maintenance shops
- Small fast lubes
- Independent repair facilities
- Industrial manufacturing facilities

TYPICAL FLUIDS

- Diesel exhaust fluid

TECHNICAL SPECIFICATIONS

Operating Temperature Range	-40°F to 158°F (-40°C to 70°C)
Wetted Parts	Hybrid polymer, brass, nitrile rubber
Sound Pressure Level	80 dB(A)
Sound Power Level	87 dB(A)
Instruction Manual	3A8216

ORDERING OPTIONS

HOSE REELS

Part Number	Description
HEL015	LDX Series, DEF, 1/2 in (13 mm) inlet, 1/2 in x 45 ft (13 mm x 14 m) hose, BSPT

ACCESSORIES

Part Number	Description
25U370	Inlet kit
18F444	1/2 in BSPT to 3/4 in hose barb adapter
18F445	1/2 in to 3/4 in adapter, BSPT



XD 30 DEF HOSE REELS



Features and Benefits

- For use with SD and LD pumps (LD pump with manual nozzle only)
- Stainless steel fluid section with open porting ensures high fluid flow with minimal pressure loss
- Flexible positioning of guide arm for mounting on bench, overhead, wall, tote or utility truck
- 50 psi maximum pressure
- 3/4 in x 50 ft inlet hose with 3/4 in BSPP(M) swivel connection to provide leak-free connection

TYPICAL APPLICATIONS

- Automotive and heavy-duty dealerships
- Mining
- Service and fast lube centers
- Fleet service facilities
- In-plant
- Lube trucks

TYPICAL FLUIDS

- Diesel exhaust fluid

TECHNICAL SPECIFICATIONS

Operating Temperature Range	12°F to 140°F (-11°C to 60°C)
Maximum Working Pressure	50 psi (3.5 bar)
Wetted Parts (bare reel only)	Zinc plated steel, polyurethane, steel
Weight (without hose)	98 lb (44.5 kg)
Sound Pressure Level	85.8 dB (A)
Sound Power Level	94.9 dB (A)
Instruction Manual	3A1767

ORDERING OPTIONS

HOSE REELS

Part Number	Description
HSDD5B	XD 30 DEF hose reel, 3/4 in x 50 ft, blue, BSPP
HSDD5F	XD 30 DEF hose reel, 3/4 in x 50 ft, yellow, BSPP
HSDDDB	XD 30 DEF hose reel, bare, blue, BSPP
HSDDDF	XD 30 DEF hose reel, bare, yellow, BSPP

HOSE REEL INLET KITS


A hose inlet kit is required when ordering an XD reel.

Part Number	Description
24W250	2 ft DEF inlet hose kit for XD 30 reels. 3/4 in BSPP(F) x cut end and 90° elbow.
24W251	6 ft DEF inlet hose kit for XD 30 reels. 3/4 in BSPP(F) x cut end and 90° elbow.
124875	2 ft DEF hose, 3/4 in BSPP(M) x cut end (inlet hose)
124581	6 ft DEF hose, 3/4 in BSPP(M) x cut end (inlet hose)


ACCESSORIES

ORDERING OPTIONS

MOUNTING BRACKETS

	Part Number	Description
	24F870	AODD tote/wall mounting bracket with nozzle holder
	24F679	AODD drum mounting bracket with nozzle holder
	124541	AODD nozzle bath holder

DISPENSE AND SUCTION HOSES






	Standard	Part Number	Description
		24W148	2 ft suction hose kit with (2) hose clamps
		24W149	5 ft suction hose kit with (2) hose clamps
		24W190	6 ft dispense hose kit with (2) hose clamps
		24W154	12 ft dispense hose kit with (2) hose clamps
	24W161	20 ft dispense hose kit with (2) hose clamps	
	Deluxe	124875	2 ft suction hose, 3/4 in BSPP(M) x cut end (inlet hose)
		124581	6 ft suction hose, 3/4 in BSPP(M) x cut end (inlet hose)
		124671	12 ft dispense hose, 3/4 in BSPP x 3/4 in BSPP
		125079	12 ft dispense hose, 3/4 in BSPP x cut end
		124603	20 ft dispense hose, 3/4 in BSPP x 3/4 in BSPP
		125074	20 ft dispense hose, 3/4 in BSPP x cut end
		125242	50 ft dispense hose, 3/4 in BSPP x 3/4 in BSPP

DIESEL EXHAUST FLUID (DEF) SYSTEMS



ORDERING OPTIONS

FITTINGS

	Part Number	Description
	127656	1 in BSP(F) elbow fitting, black
	127657	1 in BSP(F) x 3/4 in barb hose tail, black
	127720	1 in BSP(F) x 1 in BSP(F) linear socket, black
	127804	3/4 in x 1 in BSPP(F) swivel fitting with seals
	127805	1 in BSPP(F) x 1 in BSPP(F) coupler
	127806	1 in BSPP(M/F) swivel, white
	127815	3/4 in BSP x 3/4 in barb SST swivel hose tail
	127823	1 in BSP x 3/4 in barb elbow, white
	116306	1/4 in NPT, 50 psi air safety valve for Standard AODD pump packages
	124963	1/8 in NPT, 50 psi air safety valve for Deluxe AODD pump packages
	24F524	3/4 in BSPP(M) x 3/4 in BSPP(F) SST swivel

CLOSED-SYSTEM COUPLER ACCESSORIES

ORDERING OPTIONS

Maintaining fluid purity is essential to the longevity of your equipment and maintaining selective catalytic reduction (SCR) engines. With a closed-system design you can minimize fluid contamination and prevent spills. Choose from a variety of industry-accepted closed-system inlet kits to best suit your needs.

COLDER



DrumQuick® PRO Quick Connect Coupler System. Economical polypropylene assembly can withstand thousands of quick and fast connections.

	Part Number	Description
	24F532	Colder closed-system coupler kit – includes drum coupler (124548), drum insert (124549) and downtube (124550)
	124548	Colder closed-system drum coupler
	124549	Colder closed-system drum insert
	125014	Colder closed-system drum insert with buttress thread
	124550	Colder closed-system 47 in downtube


DrumQuick® is a registered trademark of Colder Products Company.

MICRO MATIC

Reusable Stainless Valve (RSV) is ideal for multi-use applications and is simple to integrate with drums, totes and custom packages.

	Part Number	Description
	17C908	Micro Matic RSV dispense coupler, 3/4 in barbed outlet, 4 pin, stainless steel
	127637	Micro Matic RSV container valve, 2.5 in x 5 in, 4 cam, stainless steel valve, EPDM seals
Image to come	2008242	DEF Downtube

DIESEL EXHAUST FLUID (DEF) SYSTEMS

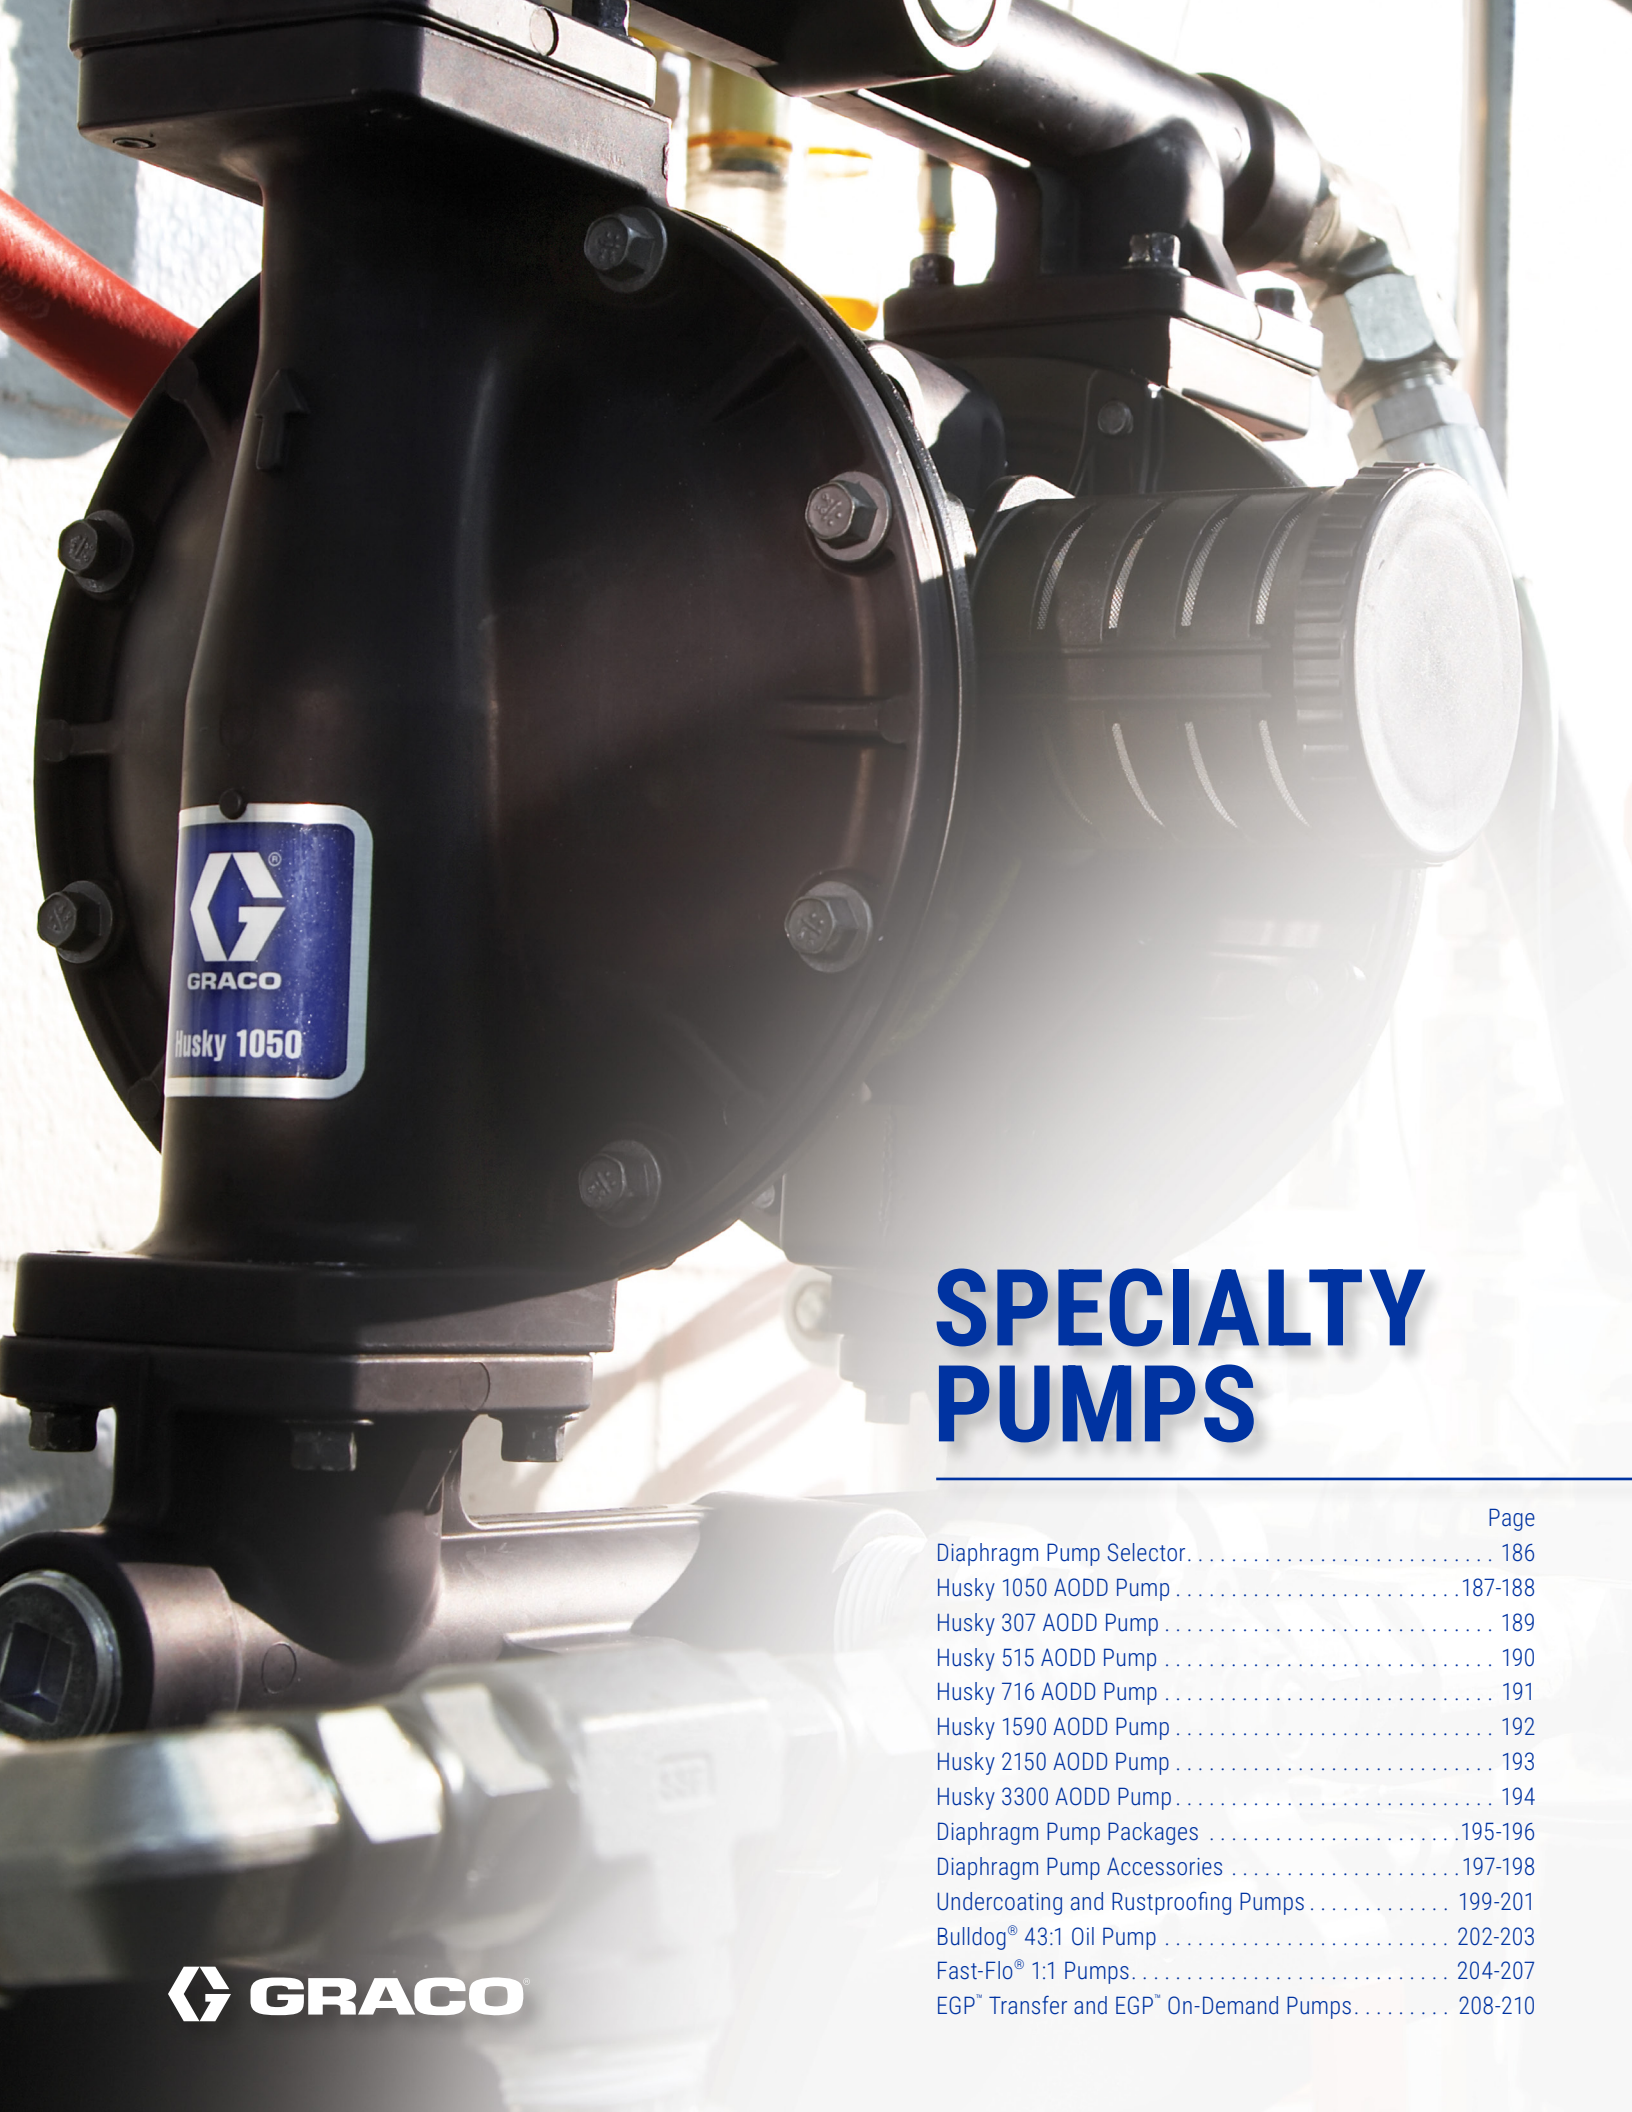

SPECIALTY PUMPS

	Page
Diaphragm Pump Selector.....	186
Husky 1050 AODD Pump.....	187-188
Husky 307 AODD Pump.....	189
Husky 515 AODD Pump.....	190
Husky 716 AODD Pump.....	191
Husky 1590 AODD Pump.....	192
Husky 2150 AODD Pump.....	193
Husky 3300 AODD Pump.....	194
Diaphragm Pump Packages.....	195-196
Diaphragm Pump Accessories.....	197-198
Undercoating and Rustproofing Pumps.....	199-201
Bulldog® 43:1 Oil Pump.....	202-203
Fast-Flo® 1:1 Pumps.....	204-207
EGP™ Transfer and EGP™ On-Demand Pumps.....	208-210

DIAPHRAGM PUMP SELECTION GUIDE

SPECIALTY PUMPS

Husky Series	Part Number	Pump Description	Fluids	Listings	Max PSI	Reference Pages
 Husky 307	D31255	Husky 307 Acetal – 3/8 in Acetal/TPE	<ul style="list-style-type: none"> • Oil evacuation • Oil transfer • Water • Antifreeze • Windshield wash fluid 	–	100 psi (6.9 bar)	191
 Husky 515	243669	Husky 515 Acetal Split Inlet – 3/4 in Acetal/Buna Dual Inlet	<ul style="list-style-type: none"> • 50/50 windshield wash solution • Water • Antifreeze 	–	100 psi (6.9 bar)	192
 Husky 716	241906	Husky 716 Aluminum – 3/4 in Aluminum/Buna-N	<ul style="list-style-type: none"> • Oil evacuation • Oil transfer • Water • Antifreeze • Windshield wash fluid 	–	100 psi (6.9 bar)	193
 Husky 1050	647016	Husky 1050 Aluminum – 1 in Aluminum/TPE	<ul style="list-style-type: none"> • Water • Antifreeze • Fuel transfer • Gasoline (up to 10% ethanol) 	UL	100 psi (6.9 bar)	189-190
 Husky 1050	647731	Husky 1050 Aluminum – 1 in Aluminum/Buna-N	<ul style="list-style-type: none"> • Oil evacuation • Oil transfer 	UL	100 psi (6.9 bar)	189-190
 Husky 1050	647648	Husky 1050 Aluminum – 1 in Aluminum/TPE	<ul style="list-style-type: none"> • Fuel dispense • Gasoline (up to 10% ethanol) 	UL	50 psi (3.5 bar)	189-190
 Husky 1590	DB3525	Husky 1590 Aluminum – 1.5 in Aluminum/TPE	<ul style="list-style-type: none"> • Oil evacuation • Oil transfer • Water • Antifreeze 	–	120 psi (8.3 bar)	194
 Husky 2150	DF3525	Husky 2150 Aluminum – 2 in Aluminum/TPE	<ul style="list-style-type: none"> • Oil evacuation • Oil transfer • Water • Antifreeze 	–	120 psi (8.3 bar)	195
 Husky 3300	652002	Husky 3300 Aluminum – 3 in Aluminum/TPE	<ul style="list-style-type: none"> • Oil evacuation • Oil transfer • Water • Antifreeze 	–	125 psi (8.6 bar)	196



HUSKY 1050 AODD PUMP

EFFICIENCY, PERFORMANCE AND BEST-IN-CLASS ENGINEERING

Husky pneumatic double-diaphragm pumps feature a stall-free, low-pulsation air valve, which provides a smooth and rapid changeover. Typical applications include oil transfer and evacuation, fuel dispense and transfer, windshield wash solution dispense, and water and antifreeze dispense. Some models UL-approved for use in pumping gasoline and gasoline/alcohol blends up to 10% ethanol, diesel fuel, fuel oil and lubricating oil.



Modular Air Valve

Stall-free, low-pulsation operation provides smooth and rapid changeover

One-Piece Center Section

Eliminates air leaks for more efficient operation

Longer Diaphragm Life

Up to 5x longer diaphragm life for less maintenance and downtime

Four-Bolt Joint Design

Bolted design provides even sealing pressure for leak-free operation

Multiple Ports

Increased number of ports for installation flexibility

SPECIALTY PUMPS


TYPICAL APPLICATIONS

- Automotive dealerships
- Fast lube centers
- Service shops
- Heavy-duty dealerships
- Fleet services facilities
- In-plant
- Lube trucks
- Mining

TYPICAL FLUIDS

- Oil
- Fuel
- Water
- Antifreeze
- Washer fluid

PUMP PERFORMANCE

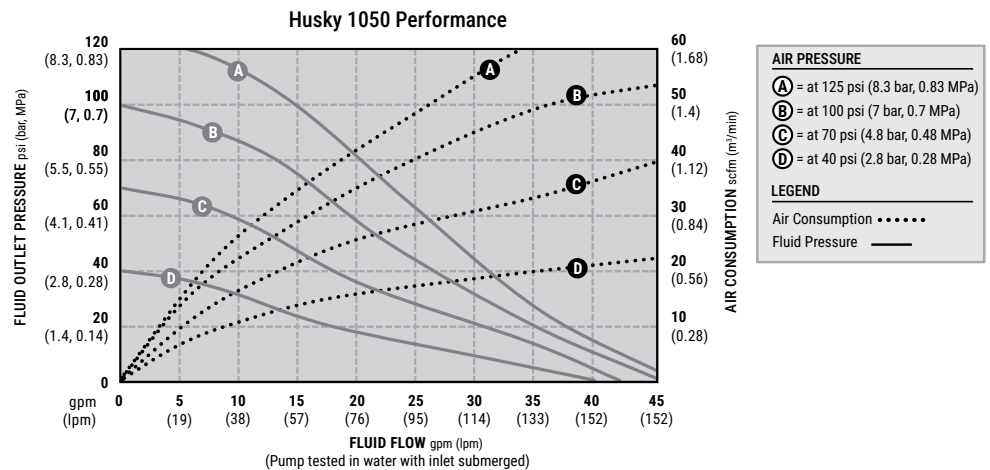

HUSKY 1050 AODD PUMP

TECHNICAL SPECIFICATIONS

Maximum fluid working pressure	
Transfer Pump	100 psi (6.9 bar, 0.69 MPa)
Fuel Dispense Pump	50 psi (3.5 bar, 0.35 MPa)
Air pressure operating range	
Transfer Pump	20 psi to 100 psi (1.4 bar to 6.9 bar, 0.14 MPa to 0.69 MPa)
Fuel Dispense Pump	0 psi to 50 psi (1.4 bar to 3.5 bar, 0.14 MPa to 0.35 MPa)
Air consumption at 70 psi (0.48 MPa, 4.8 bar), 20 gpm (76 lpm)	25 scfm
Air consumption at 50 psi (0.35 MPa, 3.5 bar), full flow	25 scfm
Fluid displacement per cycle	0.17 gal (0.64 l)
Maximum values with water as media under submerged inlet conditions at ambient temperature:	
Maximum air consumption	64 scfm
Maximum free-flow delivery	
Transfer Pump	50 gpm (189 lpm)
Fuel Dispense Pump	38 gpm (144 lpm)
Maximum pump speed	
Transfer Pump	275 cpm
Fuel Dispense Pump	210 cpm
Maximum suction lift (varies widely based on ball/seat selection and wear, operating speed, material properties and other variables)	16 ft (4.9 m) dry, 29 ft (8.8 m) wet
Maximum-size pumpable solids	1/8 in (3.2 mm)
Recommended cycle rate for continuous use	93 cpm to 140 cpm
Recommended cycle rate for circulation systems	20 cpm
Sound Power*	
at 70 psi (0.48 MPa, 4.8 bar) and 50 cpm	78 dB(A)
at 100 psi (0.7 MPa, 7.0 bar) and full flow	90 dB(A)
Sound Pressure**	
at 70 psi (0.48 MPa, 4.8 bar) and 50 cpm	84 dB(A)
at 100 psi (0.7 MPa, 7.0 bar) and full flow	96 dB(A)
Operating temperature range	10°F to 150°F (-12°C to 65°C)
Air inlet size	1/2 in NPT(F)
Fluid inlet size	1 in NPT(F)
Fluid outlet size	1 in NPT(F)
Weight	23 lb (10.5 kg)
Wetted parts	Aluminum, TPC-ET, acetal, PTFE, Buna-N
Non-wetted external parts	Aluminum, coated carbon steel
Instruction manual	313597

*Sound power measured per ISO-9614-2.

**Sound pressure was tested 3.28 ft (1 m) from equipment.

ORDERING OPTIONS

HUSKY 1050 AODD PUMPS

Part Number	Description	Maximum Fluid Working Pressure	Fluids Handled
647016	Husky 1050 Aluminum Pump – 1 in, Aluminum/TPE	100 psi (6.9 bar)	Water / antifreeze / fuel transfer
647731	Husky 1050 Aluminum Pump – 1 in, Aluminum/Buna-N	100 psi (6.9 bar)	Oil evacuation / oil transfer
647648	Husky 1050 Aluminum Pump – 1 in, Aluminum/TPE	50 psi (3.5 bar)	Fuel dispense



HUSKY 307 AODD PUMP



Husky 307 AODD Pump

- 3/8 in fluid connections
- Fluid delivery up to 7 gpm (26.5 lpm)
- Operate as low as 20 psi up to 100 psi for max flow
- Maximum working pressure of 100 psi for long line runs
- End porting available
- High-efficiency air valve operates at maximum of 6 scfm
- Groundable to reduce risk of static and electric shock

TECHNICAL SPECIFICATIONS

Maximum fluid working pressure	100 psi (6.9 bar, 0.69 MPa)
Maximum free-flow delivery*	7.0 gpm (26.5 lpm)
Maximum pump speed	330 cpm
Fluid displacement per cycle**	0.02 gal (0.076 l)
Maximum suction lift	12 ft (3.7 m) dry
Maximum-size pumpable solids	0.06 in (1.5 mm)
Maximum ambient operating temperature***	180°F (82.2°C)
Maximum diaphragm operating temperature***	150°F (65.6°C)
Typical sound level at 50 psi (3.5 bar, 0.35 MPa) air @ 50 cpm	75 dB(A)
Maximum air consumption	6 scfm (0.17 m ³ /min)
Air pressure operating range	20 psi to 100 psi (1.4 bar to 6.9 bar, 0.14 MPa to 0.69 MPa)
Air inlet size	1/4 NPT(F) or BSPT(F)
Fluid inlet size	3/8 NPT(F)
Fluid outlet size	3/8 NPT(F)
Weight	5.2 lb (2.4 kg)
Wetted parts	Acetal with stainless steel fibers, PTFE
Instruction manual	308553

*Flow rates are with muffler and do not vary based on diaphragm material. **Displacement per cycle may vary based on suction condition, discharge head, air pressure and fluid type. ***Actual pump performance may be affected by prolonged usage at temperature.


SPECIALTY PUMPS

ORDERING OPTIONS

HUSKY 307 AODD PUMP

Part Number	Description
D31255	Husky 307 Acetal Pump - 3/8 in, Acetal/TPE

PUMP PERFORMANCE

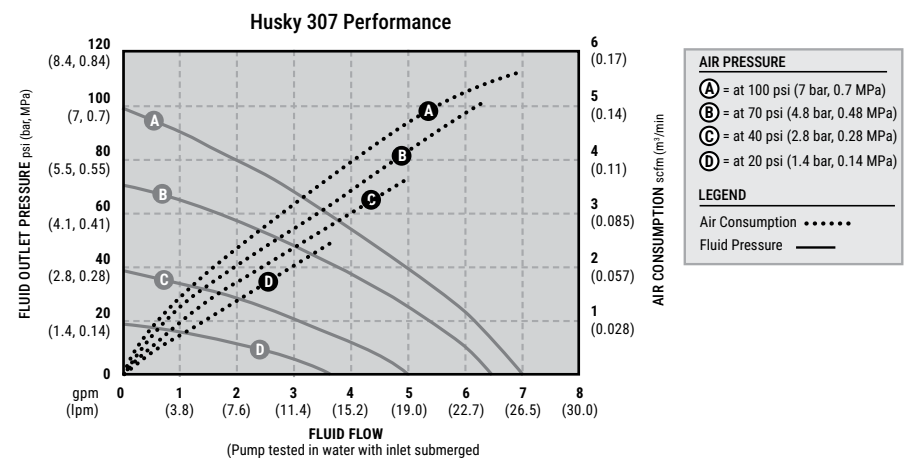

HUSKY 515 AODD PUMP



Husky 515 AODD Pump

- 1/2 in fluid connections
- Fluid delivery up to 15 gpm (56.7 lpm)
- Operate as low as 30 psi up to 100 psi for max flow
- Maximum working pressure of 100 psi for long line runs
- Center and end porting options available
- High-efficiency air valve operates at maximum of 28 scfm
- Groundable to reduce risk of static and electric shock

TECHNICAL SPECIFICATIONS

Maximum fluid working pressure	100 psi (6.9 bar, 0.69 MPa)
Maximum free-flow delivery*	15 gpm (57 l/min)
Maximum pump speed	400 cpm
Fluid displacement per cycle**	0.04 gal (0.15 l)
Maximum suction lift	15 ft (4.5 m) dry, 25 ft (7.6 m) wet
Maximum-size pumpable solids	3/32 in (2.5 mm)
Maximum ambient operating temperature***	180°F (82.2°C)
Maximum diaphragm operating temperature***	180°F (82.2°C)
Typical sound level at 70 psi (4.8 bar, 0.48 MPa) air @ 50 cpm	77 dB(A)
Maximum air consumption	28 scfm (0.672 m ³ /min)
Air pressure operating range	30 psi to 100 psi (2.1 bar to 6.9 bar, 0.21 MPa to 0.69 MPa)
Air inlet size	1/4 NPT(F)
Fluid inlet size	3/4 in NPT(F)
Fluid outlet size	1/2 and 3/4 in NPT(F)
Weight	7.8 lb (3.5 kg)
Wetted parts	Groundable acetal, Buna-N, PTFE
Instruction manual	309204


*Flow rates are with muffler and do not vary based on diaphragm material. **Displacement per cycle may vary based on suction condition, discharge head, air pressure and fluid type. ***Actual pump performance may be affected by prolonged usage at temperature.

ORDERING OPTIONS

HUSKY 515 AODD PUMP

Part Number	Description
243669	Husky 515 Acetal Split Inlet - 3/4 in, Acetal/Buna Dual Inlet

PUMP PERFORMANCE

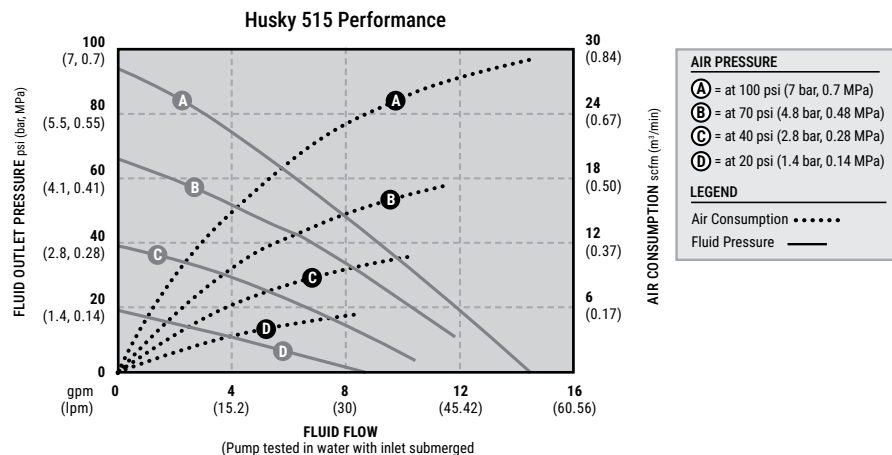



HUSKY 716 AODD PUMP



Husky 716 AODD Pump

- 3/4 in fluid connections
- Fluid delivery up to 16 gpm (60.6 lpm)
- Operate as low as 30 psi up to 100 psi for max flow
- Maximum working pressure of 100 psi for long line runs
- Center and end porting options available
- High-efficiency air valve operates at maximum of 28 scfm
- Groundable to reduce risk of static and electric shock

TECHNICAL SPECIFICATIONS

Maximum fluid working pressure	100 psi (6.9 bar, 0.69 MPa)
Maximum free-flow delivery*	16 gpm (61 l/min)
Maximum pump speed	400 cpm
Fluid displacement per cycle**	0.04 gal (0.15 l)
Maximum suction lift	15 ft (4.5 m) dry, 25 ft (7.6 m) wet
Maximum-size pumpable solids	3/32 in (2.5 mm)
Maximum ambient operating temperature***	180°F (82.2°C)
Maximum diaphragm operating temperature***	180°F (82.2°C)
Typical sound level at 70 psi (4.8 bar, 0.48 MPa) air @ 50 cpm	77 dB(A)
Maximum air consumption	28 scfm (0.672 m ³ /min)
Air pressure operating range	25 psi to 100 psi (1.8 bar to 6.9 bar, 0.18 MPa to 0.69 MPa)
Air inlet size	1/4 NPT(F)
Fluid inlet size	3/4 in NPT(F)
Fluid outlet size	3/4 in NPT(F)
Weight	8.5 lb (3.9 kg)
Wetted parts	Buna-N, acetal, aluminum, stainless steel, PTFE, zinc-plated steel
Instruction manual	308573

*Flow rates are with muffler and do not vary based on diaphragm material. **Displacement per cycle may vary based on suction condition, discharge head, air pressure and fluid type. ***Actual pump performance may be affected by prolonged usage at temperature.


SPECIALTY PUMPS

ORDERING OPTIONS

HUSKY 716 AODD PUMP

Part Number	Description
241906	Husky 716 Aluminum – 3/4 in, Aluminum/Buna-N

PUMP PERFORMANCE

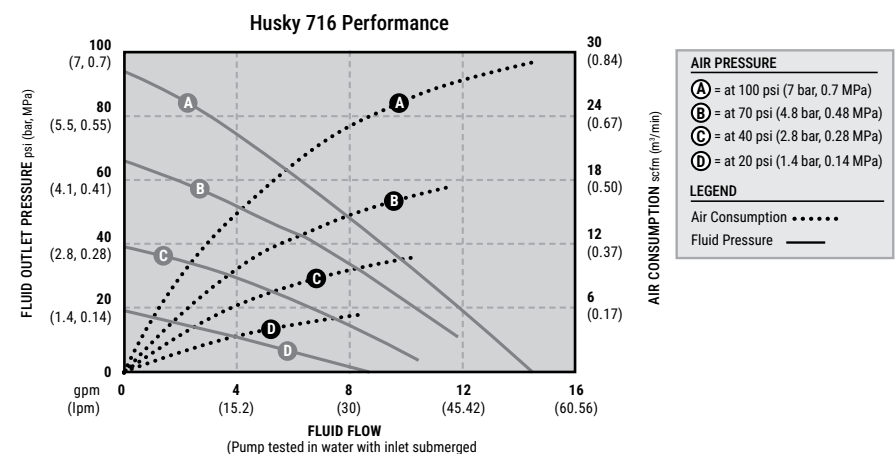

HUSKY 1590 AODD PUMP



Husky 1590 AODD Pump

- 1-1/2 in fluid connections
- Fluid delivery up to 90 gpm (340.7 lpm)
- Operate as low as 20 psi up to 120 psi for max flow
- Maximum working pressure of 120 psi for long line runs
- End porting available
- High-efficiency air valve operates at maximum of 125 scfm
- Groundable to reduce risk of static and electric shock

TECHNICAL SPECIFICATIONS

Maximum fluid working pressure	120 psi (8.4 bar, 0.84 MPa)
Maximum free-flow delivery*	100 gpm (378.5 l/min)
Maximum pump speed	200 cpm
Fluid displacement per cycle**	0.5 gal (1.96 l)
Maximum suction lift	20 ft (6.1 m) dry
Maximum-size pumpable solids	0.19 in (4.8 mm)
Maximum ambient operating temperature***	150°F (65.5°C)
Maximum diaphragm operating temperature***	150°F (65.5°C)
Typical sound level at 70 psi (4.8 bar, 0.48 MPa) air @ 125 cpm	77 dB(A)
Maximum air consumption	125 scfm (3.5 m ³ /min)
Air pressure operating range	20 psi to 100 psi (1.4 bar to 6.9 bar, 0.14 MPa to 0.69 MPa)
Air inlet size	1/2 NPT(F)
Fluid inlet size	1-1/2 NPT(F) or BSPT(F)
Fluid outlet size	1-1/2 NPT(F) or BSPT(F)
Weight	33.5 lb (15.2 kg)
Wetted parts	Acetal, aluminum, TPE, PTFE
Instruction manual	308441


*Flow rates are with muffler and do not vary based on diaphragm material. **Displacement per cycle may vary based on suction condition, discharge head, air pressure and fluid type. ***Actual pump performance may be affected by prolonged usage at temperature.

ORDERING OPTIONS

HUSKY 1590 AODD PUMP

Part Number	Description
DB3525	Husky 1590 Aluminum – 1.5 in, Aluminum/TPE

PUMP PERFORMANCE

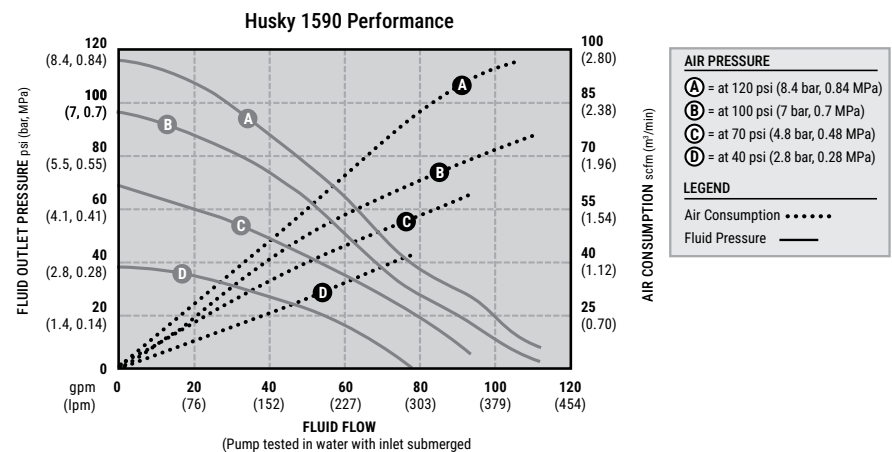



HUSKY 2150 AODD PUMP



Husky 2150 AODD Pump

- 2 in fluid connections
- Fluid delivery up to 150 gpm (567.8 lpm)
- Operate as low as 20 psi up to 120 psi for max flow
- Maximum working pressure of 120 psi for long line runs
- End porting available
- High-efficiency air valve operates at maximum of 175 scfm
- Groundable to reduce risk of static and electric shock

TECHNICAL SPECIFICATIONS

Maximum fluid working pressure	120 psi (8.4 bar, 0.84 MPa)
Maximum free-flow delivery*	150 gpm (568 l/min)
Maximum pump speed	145 cpm
Fluid displacement per cycle**	1.03 gal (3.9 l)
Maximum suction lift	20 ft (6.1 m) dry
Maximum-size pumpable solids	0.25 in (6.3 mm)
Maximum ambient operating temperature***	150°F (65.5°C)
Maximum diaphragm operating temperature***	150°F (65.5°C)
Typical sound level at 70 psi (4.8 bar, 0.48 MPa) air @ 125 cpm	78 dB(A)
Maximum air consumption	175 scfm (4.9 m ³ /min)
Air pressure operating range	20 psi to 120 psi (1.4 bar to 8.4 bar, 0.14 MPa to 0.84 MPa)
Air inlet size	1/2 NPT(F)
Fluid inlet size	2 in NPT(F)
Fluid outlet size	2 in NPT(F)
Weight	58 lb (26.3 kg), 62 lb (28.1 kg) – Extended
Wetted parts	Acetal, aluminum, TPE, PTFE
Instruction manual	308368

*Flow rates are with muffler and do not vary based on diaphragm material. **Displacement per cycle may vary based on suction condition, discharge head, air pressure and fluid type. ***Actual pump performance may be affected by prolonged usage at temperature.


SPECIALTY PUMPS

ORDERING OPTIONS

HUSKY 2150 AODD PUMP

Part Number	Description
DF3525	Husky 2150 Aluminum – 2 in, Aluminum/TPE

PUMP PERFORMANCE

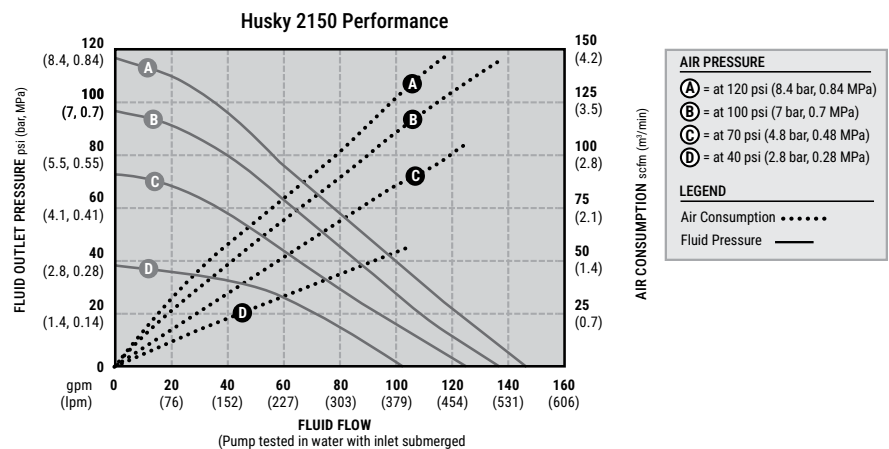

HUSKY 3300 AODD PUMP



Husky 3300 AODD Pump

- 3 in fluid connection
- Fluid delivery up to 300 gpm (1,135.6 lpm)
- Operate as low as 20 psi up to 125 psi for max flow
- Maximum working pressure of 125 psi for long line runs
- Rotatable center porting available
- High-efficiency air valve operates at maximum of 335 scfm
- Groundable to reduce risk of static and electric shock

TECHNICAL SPECIFICATIONS

Maximum fluid working pressure	125 psi (8.4 bar, 0.84 MPa)
Maximum free-flow delivery*	300 gpm (1,135 l/min)
Maximum pump speed	103 cpm
Fluid displacement per cycle**	2.9 gal (11 l)
Maximum suction lift	8 ft (2.4 m) dry, 28 ft (8.5 m) wet
Maximum-size pumpable solids	0.5 in (13 mm)
Maximum ambient operating temperature***	150°F (65.5°C)
Maximum diaphragm operating temperature***	150°F (65.5°C)
Typical sound level at 50 psi (3.4 bar, 0.34 MPa) air @ 50 cpm	92 dB(A)
Maximum air consumption	335 scfm (9.5 m ³ /min)
Air pressure operating range	20 psi to 125 psi (1.4 bar to 8.6 bar, 0.14 MPa to 0.86 MPa)
Air inlet size	3/4 NPT(F)
Fluid inlet size	3 in (76.2 mm) NPT or BSPT with ANSI/DIN flange
Fluid outlet size	3 in NPT(F) or BSPT(F)
Weight	150 lb (68 kg)
Wetted parts	Acetal, aluminum, carbon-coated steel, TPE
Instruction manual	3A0410


*Maximum values with water as media at ambient temperature. Water level is approximately 3 ft above pump inlet. **Startup pressures and displacement per cycle may vary based on suction condition, discharge head, air pressure and fluid type. ***Sound power measured per ISO-9614-2. Sound pressure was tested 3.28 ft (1 m) from equipment.

ORDERING OPTIONS

HUSKY 3300 AODD PUMP

Part Number	Description
652002	Husky 3300 Aluminum – 3 in, Aluminum/TPE

PUMP PERFORMANCE

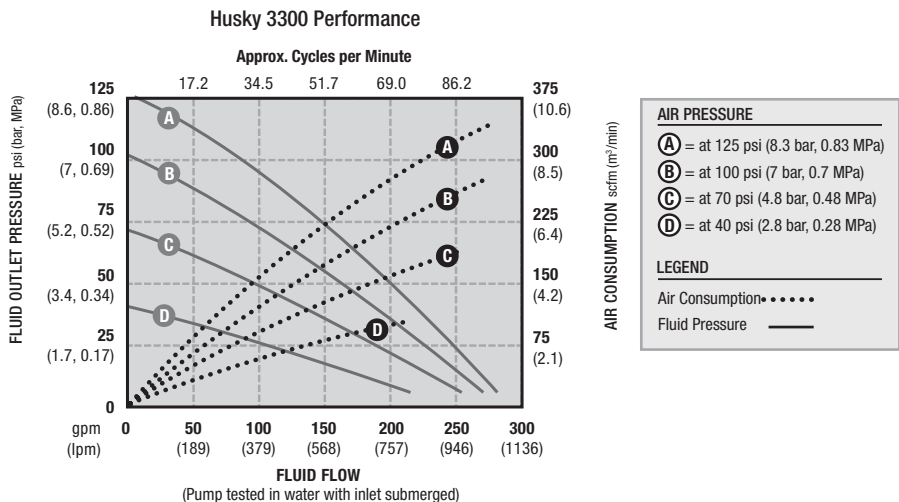



DIAPHRAGM PUMP PACKAGES

ORDERING OPTIONS

PRE-MIXED WINDSHIELD WASH SOLVENT AND COOLANT DISPENSE







Package Number	237161	
Pump Type	Husky 307	
Pump	D31255	
Installation Kit	237160	
Installation Kit Includes	Air Filter	110146
	Air Gauge	108190
	Air Regulator	110318
	Fluid Connect Hose – 4 ft	220596
	Air Connect Hose – 6 ft	109125
	Mounting Bracket	190125
	Suction Kit	223888
Wall Bracket Kit	224835	
Instruction Manual	308426	

DIAPHRAGM PUMP PACKAGES

ORDERING OPTIONS

BULK ANTIFREEZE AND WINDSHIELD SOLVENT TRANSFER PACKAGES


				
Package Number	244679	244680	244681	244682
Pump Type	Husky 1050 – Dual Inlet	Husky 1050 – Single Inlet	Husky 515 – Dual Inlet	Husky 716 – Single Inlet
Pump	647016	647016	243669	241906
Air Regulator	244844	244844	110147	110147
Fluid Connect Hose	115042	115042	109105	109105
Air Connect Hose	205418	205418	109125	109125
Air Shut-Off Valve	110225	110225	110223	110223
Wall Mount Bracket	24C637	24C637	224835	224835
Dual Inlet Manifold	24D147	-	-	-
Suction Kit	(2) 236054	236054	(2) 236054	236054
Thermal Relief Kit	238428	238428	238428	238428
Instruction Manual	309353	309353	309353	309353




DIAPHRAGM PUMP ACCESSORIES

ORDERING OPTIONS


AIR LINE FILTERS

	Husky Pump	307	515/716	1050	1590	2150	3300
	Part Number	110146	110146	106148	106149	106150	106150


AIR REGULATOR AND GAUGE

	Husky Pump	307	515/716	1050	1590	2150	3300
	Part Number	110147	110147	244844	202858	206199	207651


AIR QUICK-CONNECT COUPLER

	Husky Pump	307	515/716	1050	1590	2150	3300
	Part Number	208536	208536	110199	110199	110199	110200


AIR QUICK-CONNECT NIPPLE

	Husky Pump	307	515/716	1050	1590	2150	3300
	Part Number	169970	169970	110196	110196	110196	110197

BLEED-TYPE AIR VALVE

	Husky Pump	307	515/716	1050	1590	2150	3300
	Part Number	110223	110223	110224	110225	110225	110226


DUAL-INLET MANIFOLD

	Husky Pump	307	515	1050	1590	2150	3300
	Part Number	237211	194347	24D205	-	-	-

GROUNDING WIRE AND CLAMP

	Husky Pump	307	515/716	1050	1590	2150	3300
	Part Number	222011	222011	238909	222011	238909	238909


SUCTION HOSE KIT

	Husky Pump	307	515/716	1050	1590	2150	3300
	Part Number	236054	236054	236054	222916	222916	-


DIAPHRAGM PUMP ACCESSORIES

ORDERING OPTIONS


THERMAL RELIEF KIT

	Husky Pump	307	515/716	1050	1590	2150	3300
	Part Number	238899	238428	238428	-	-	-

THERMAL RELIEF VALVES – 150 PSI (10.3 BAR)

	Husky Pump	307	515/716	1050	1590	2150	3300
	Part Number	113497 al/bn, 112119 ss/tf					

WALL BRACKET

	Husky Pump	307	515/716	1050	1590	2150	3300
	Part Number	224835	224835	24C637	-	-	-

AIR-OPERATED DOUBLE-DIAPHRAGM TRANSFER PUMPS REPLACEMENT PARTS

									
Pump Number	D31255	243669	241906	647016	647731	647648	DB3525	DF3525	652002
Air Valve Replacement Kit	239952	241657	241657	24B768	24B768	24B768	236273	236273	24K860
Seats	D03200	D05200	D05200	24B634	24B632	24B634	D0B500	D0F500	24K932
Balls	D03050	D05070	D05070	24B639	24B639	24B639	D0B020	D0F020	24K937
Diaphragm Kit	D03005	D05007	D05007	24B624	24B624	24B624	D0B005	D0F005	24K901
Fluid Repair Kit (Ball, Seats, Diaphragm)	D03255	D05277	D05277	25A857	-	25A857	D0B525	D0F525	25A874

UNDERCOATING AND RUSTPROOFING PUMPS



IDEAL FOR UNDERCOATING AND RUSTPROOFING APPLICATION IN MEDIUM-SIZED SHOPS

Utilizing the durable Fire-Ball® 300 pump, these kits are designed for use in medium-volume undercoating and rustproofing dispense applications. A three-inch differential air motor ensures smooth pumping, and the double-acting pump design provides reliable material flow and accurate dispense.



Durable Casting

Thick cast aluminum air motor housing offers unmatched durability.

Superior Material Handling

Double-acting pump ensures smooth fluid flow.

Extended Seal Life

In-line pump design aligns the air motor piston and fluid piston rods to maximize seal life.

Wetted-Parts Options

Available in carbon steel for petroleum-based or SST for water-based materials.

Corrosion-Resistant

Corrosion-resistant design utilizes liquid salt nitriding, nickel plating, stainless steel, aluminum and chrome on key components for longer life.

TYPICAL APPLICATIONS


- Undercoating, rustproofing and sound-deadening materials
- Automotive and heavy-duty vehicle dealerships
- Fast lube centers and service shops
- Fleet service facilities

TYPICAL FLUIDS

- Undercoating and rustproofing (Verify chemical compatibility for pump's wetted components with undercoating material supplier or contact Graco directly at 1-800-533-9655)

PUMP PERFORMANCE

FIRE-BALL 300 15:1 PUMPS

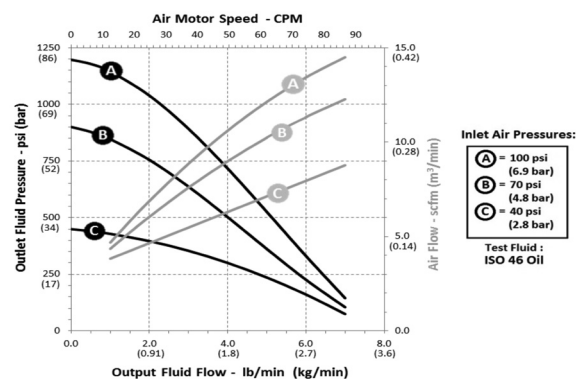

UNDERCOATING AND RUSTPROOFING PUMP PACKAGES

TECHNICAL SPECIFICATIONS

Fluid Pressure Ratio	15:1
Air Motor Effective Diameter	3 in (76.2 mm)
Annual Usage	Up to 10,000 lb (4,535 kg)
Maximum Fluid Working Pressure	2,700 psi (186 bar / 18.6 MPa)
Approximate Free-Flow Rate @ 100 psi	7.5 lb/min (3.4 kg/min)
Output per Cycle	1.29 oz (36.6 g)
Continuous-Duty Flow Rate	0.7 lb/min (0.32 kg/min)
Approximate Air Use and Flow @ 100 psi (80 cpm)	14 @ 6.5 lb/min (0.40 @ 2.9 kg/min)
Air Inlet	3/8 in NPT(F)
Fluid Outlet	1/4 in NPT(F)
Air Operation Range	40 psi to 180 psi (2.8 bar to 12.5 bar)
Max Recommended Pump Speed	66 cpm
Cycles per Pound	12.4 cpp
Cycles per Kg	27 cpk
Wetted Parts	CS, AL, leather, PTFE, rubber
Sound Pressure Level	77.8 dB(A)
Sound Power Level	85.6 dB(A)
Approximate Weight	22 lb (10 kg)
Instruction Manual	306531

ORDERING OPTIONS

UNDERCOATING PACKAGES



Package Number	222077	226342	226269
Type of Package	Stationary	Portable Dolly-Mounted	Stationary
Ratio	15:1	15:1	15:1
Container Size	35 lb (16 kg)	120 lb (54 kg)	400 lb (180 kg)
Pump Part Number	206405	206699	206700
Dispense Kit*	222079	222079	—
Tip	286517	286517	286517
Hose Length	15 ft (4.6 m)	15 ft (4.6 m)	25 ft (7.6 m)
Drum Cover	222058	204574	200326
Portable Base	—	204144	—
Instruction Manual	307879	307879	307879


*Dispense kit includes Air Regulator (110234), Air Gauge (100960), Spray Gun (234237)

UNDERCOATING AND RUSTPROOFING ACCESSORIES




ORDERING OPTIONS


APPLICATION GUN

	Part Number	Description
	234237	Four-finger silver gun with tip guard 243161 and tip 286517. 4,500 psi (310 bar) x 3/8 NPT(f) inlet. Must order 155570 adapter and 239663 straight swivel to accommodate gun to 1/4 in (mbe) hose.


BUNG ADAPTER

	Part Number	Description
	239966	Bung adapter compatible with Fire-Ball 300, 15:1 pump


FILTER

	Part Number	Description
	214570	60-mesh aluminum filter, 3/8 NPT(F) inlet, 1/4 NPT(F) outlet. Maximum working pressure 3,000 psi (210 bar).


NOZZLE EXTENSION

	Part Number	Description
	206496	Nozzle extension delivers 360° coating fan into blind areas. Length 30-3/4 in (99 cm) x 7/8-14(f) end. Tip 206502, size .043.

REPLACEMENT SCREEN ELEMENTS (SST)

		Part Number		
		30 Mesh	60 Mesh	100 Mesh
	3-Pack	224458	224459	224469
	25-Pack	238436	238438	238440

SWIVEL

	Part Number	Description
	202577	Z-swivel allows non-binding movement for hard-to-reach locations. Order 155570 adapter separately to accommodate 234237 gun.

BULLDOG® 43:1 OIL PUMP

RELIABLE OPERATION IN THE HARSHTEST ENVIRONMENTS

With its efficient, large-ported air valve, the Bulldog 43:1 air-powered pump is the highest-performing in its class. Downtime is minimized by an air motor design that has been developed and tested for more than 10 million cycles of operation.



Added Safety

Grounded lug prevents static buildup.

Easy Installation

Compact, low-profile design makes installation easier.

Corrosion-Resistant

Lightweight aluminum construction.

Built-In Reliability

Tested to 10 million cycles without failure.

TYPICAL APPLICATIONS


- Supplies hydraulic oil to accumulators in oil rig blow-out prevention systems.

TYPICAL FLUIDS

- Hydraulic oil

PUMP PERFORMANCE

BULLDOG 43:1 PUMPS

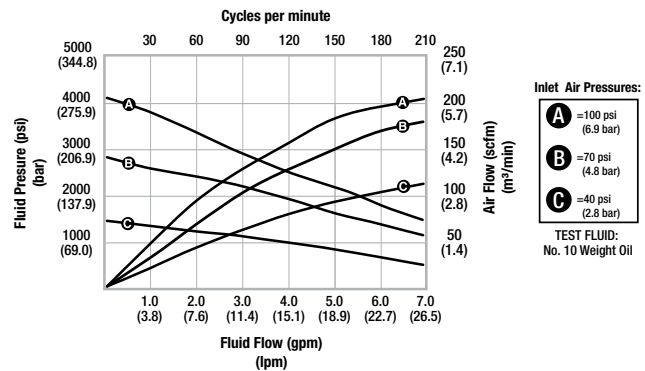

Inlet Air Pressures:

- A** = 100 psi (6.9 bar)
- B** = 70 psi (4.8 bar)
- C** = 40 psi (2.8 bar)

TEST FLUID:
No. 10 Weight Oil



TECHNICAL SPECIFICATIONS

Fluid Pressure Ratio	43:1
Maximum Fluid Working Pressure	4,300 psi (301 bar / 30.1 MPa)
Maximum Air Input Pressure	100 psi (7 bar)
Air Inlet	3/4 in NPSM(F)
Fluid Inlet	1 in NPT(F)
Fluid Outlet	3/4 in NPT(F)
Wetted Parts	Carbon steel, stainless steel, chrome plating, zinc plating, nickel plating, brass, Buna-N
Instruction Manual	309966

ORDERING OPTIONS

BULLDOG 43:1 PUMPS

Part Number	Description
218334	43:1 Bulldog hydraulic supply pump

ACCESSORIES

AIR PRESSURE REGULATORS

Part Number	Description
206197	1/2 in NPT inlet and outlet
207755	3/4 in NPT inlet and outlet

AIR LINE FILTERS

Part Number	Description
106149	1/2 in NPT inlet and outlet
106150	3/4 in NPT inlet and outlet

AIR LINE LUBRICATORS

Part Number	Description
214848	1/2 in NPT inlet and outlet
214849	3/4 in NPT inlet and outlet

GROUNDING CLAMP AND WIRE

Part Number	Description
103538	Grounding clamp
222011	Ground wire

BLEED-TYPE MASTER AIR VALVE

Part Number	Description
107142	1/2 in NPT inlet and outlet

REPAIR KITS

Part Number	Description
24U227	Pump lower repair kit
24U228	Air motor repair kit
24W515	Pump and air motor repair kit

FAST-FLO® 1:1 PUMPS

USED FOR LOW-VOLUME DISPENSE OF A VARIETY OF FLUIDS

This air-operated piston pump is ideal for pumping various fluids and provides a continuous-duty flow rate of up to 5 gpm.



High-Quality Air Motor

Differential air motor ensures smooth pumping.

Lightweight Design

Allows for easy transport and drum insertion.

Easily Controlled Flow Rate

Simple regulation of air supply controls flow rate.

Submersible Suction Tube

Stubby and drum length suction tubes eliminate the need for suction pipe or tube.

Corrosion Resistance

Available stainless steel models offer protection in harsh environments.

TYPICAL APPLICATIONS

- Low-pressure, high-volume transfer of low viscosity fluids
- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- In-plant
- Lube trucks
- Mining


TYPICAL FLUIDS

- Water
- Antifreeze
- Windshield wash fluid

NOTE: Use Fast-Ball® 1:1 for petroleum-based products.

PUMP PERFORMANCE

FAST-FLO 1:1 PUMPS

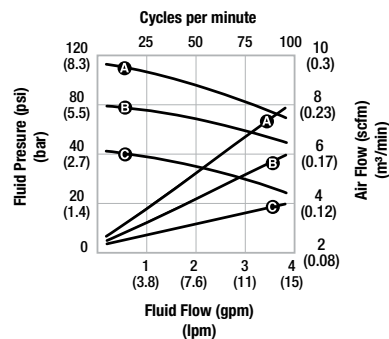

Inlet Air Pressures:

- A** = 100 psi (6.9 bar)
- B** = 70 psi (4.8 bar)
- C** = 40 psi (2.8 bar)

TEST FLUID:
No. 10 Weight Oil



TECHNICAL SPECIFICATIONS

Fluid Pressure Ratio	1:1
Air Motor Effective Diameter	1.4 in (35.6 mm)
Maximum Fluid Working Pressure	180 psi (12 bar/1.2 Mpa)
Approximate Free-Flow Rate @ 100 psi (80 cpm)	5 gal/min (19 liters/min)
Output per Cycle	151 cc
Approximate Air Use and Flow @ 100 psi (80 cpm)	7 csfm @ 3.1 gpm (0.2 m ³ /mm @ 11.71 lpm)
Air inlet	1/4 in NPT(F)
Fluid Inlet	1-1/2 in NPT(F)
Fluid Outlet	3/4 in NPT(F)
Air Operations Range	40 psi to 180 psi (2.8 bar to 12 bar)
Maximum Pump Speed	100 cpm
Cycles per Gallon	25 cpg
Cycles per Liter	6.6 cpl
Wetted Parts	See ordering info
Sound Pressure Level	72 dB(A)
Sound Power Level	82 dB(A)
Instruction Manual	307427

ORDERING OPTIONS

FAST-FLO 1:1 PUMPS



Includes motor and pump lower assembly.

Fluid	Length	Tube Material	Seal Material	Approvals	Part Number
Antifreeze, Windshield Washer Solvent, ATF, Oil	Drum	Stainless Steel	Polyethylene	ETL, CE, EX	226942
	Universal	Stainless Steel	Polyethylene	ETL, CE, EX	226945



FAST-FLO® 1:1 PUMP ACCESSORIES

ORDERING OPTIONS



HOSE AND FITTING KITS

	Part Number	Description	Includes	
			Air Hose / Swivel Elbow	Fluid Hose / Swivel Elbow
	222118	18 in (0.5 m) for connecting wall-mounted Fast-Flo 1:1 pumps to piping	109123 / 155541	109108 / 160327
	222119	6 ft (1.8 m) for use with drum-mounted Fast-Flo 1:1 pumps	109125 / 155541	109105 / 160327


BUNG ADAPTERS

	Part Number	Description
	214583	Allows direct mounting of full-length Fast-Flo 1:1 pumps into standard 2 in NPT drum bung (included).
	217359	Sealed bung adapter for Fast-Flo pumps; can be used with suction kit 236054.

INSTALLATION KITS

	Part Number	Description
	218316	Includes regulator (104815), gauge (104655) and fittings (169969/114558) as necessary for normal installation.
	210881	Wall mounting bracket for Fast-Flow 1:1 Pumps



SUCTION KIT

	Part Number	Description	Includes		
			Bung Adapter	Bushing Pipe	6 ft Hose
	236054	6 ft (1.8 m) suction kit for 55 gal (200 l) drums. For use with Fast-Ball, Mini Fire-Ball and Fire-Ball universal pumps.	188845	101496	109105




ORDERING OPTIONS


DRUM COVERS

	Part Number	Description
	204574	Drum cover for 10 gal (40 l) and 16 gal (60 l) sized containers. Drum cover mounts on top of an open drum with mounting house for a 1:1 pump. Includes thumb screws and a rubber gasket.
	200326	Drum cover for a 55 gal (200 l) container. Drum cover mounts on top of an open drum, with mounting for a 1:1 pump.

AIR LINE FILTER

	Part Number	Description
	106149	1/2 in NPT inlet and outlet

AIR LINE LUBRICATOR

	Part Number	Description
	214848	1/2 in NPT inlet and outlet

EGP™ TRANSFER AND EGP ON-DEMAND

ELECTRIC CONVENIENCE

There's an easier, more efficient way to pump fluid to your critical equipment. Graco's all-electric EGP pumps reduce operating costs without compromising the durability you expect from the industry leader in pumping solutions. Add convenience and peace of mind to your everyday operations.

EGP TRANSFER PUMPS

Use the EGP Transfer Pump in locations where compressed air is unavailable or too cumbersome for short-distance fluid transfer.



Electrical Flexibility

- Available in 12 VDC and 115 VAC power options.

Smooth Fluid Flow 8 gpm (30 lpm)

- Output flow is continuous and non-pulsating up to 8 gpm (30 lpm).

Heavy-Duty Motor with Long Life

- Industrial-grade electric motors with over-temperature protection on 115 VAC models.

Consistent Pressure

- Built-in fluid bypass valve protects pump and downstream components.

Pump Protection

- Includes inlet strainer to keep larger debris out of pump housing and extend pump life.

Plug and Play

- Self-priming, precision-machined pump design.

TYPICAL APPLICATIONS

- Filling bulk tanks from drums
- Lubricant transfer from remote locations
- Construction equipment
- Agricultural equipment
- Filling in-plant machinery
- Evacuating used oil receivers
- Filling shop oil furnaces with new or used oil
- Automotive and truck service garages
- Fleet marine and personal boat service
- Aircraft maintenance

EGP ON-DEMAND PUMPS

Install the EGP On-Demand Pump in a variety of applications including workshops, mobile trucks and industrial plants. Use it as an energy-efficient option to standard pneumatic pumps.



Electrical Flexibility

- Available in 12 VDC and 115 VAC power options.

Smooth Fluid Flow 4 gpm (15 lpm)

- Output flow is continuous and non-pulsating up to 4 gpm (15 lpm).

Heavy-Duty Motor with Long Life

- Industrial-grade electric motor with over-temperature protection on 115 VAC model.

Fluid Flow When Needed

- On-demand pressure sensing technology starts and stops the pump during the dispense.

Pump Reliability

- Internal inlet and outlet checks keep pump section flooded to maintain prime for reliable performance.

Simultaneous Dispenses

- Pump long distances and supply fluid to multiple dispense points.


TYPICAL FLUIDS

- Petroleum- and synthetic-based oils (motor, gear and ATF)
- Waste oil
- Hydraulic fluids
- Cutting oils
- Non-flammable oil-based solvents
- Oil-based herbicide carriers




PUMP PERFORMANCE

EGP TRANSFER PUMPS PERFORMANCE CHART

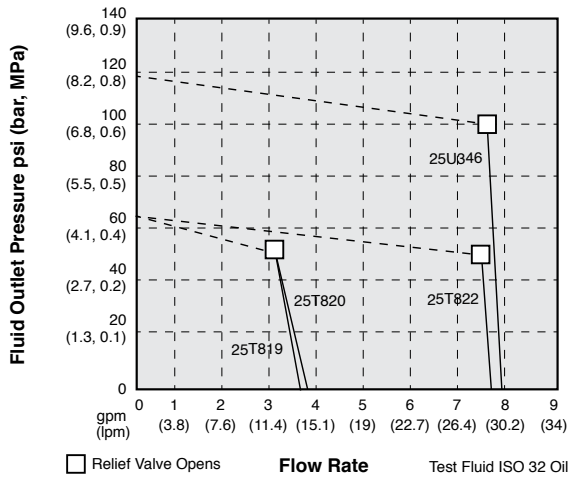

EGP ON-DEMAND PUMPS PERFORMANCE CHART

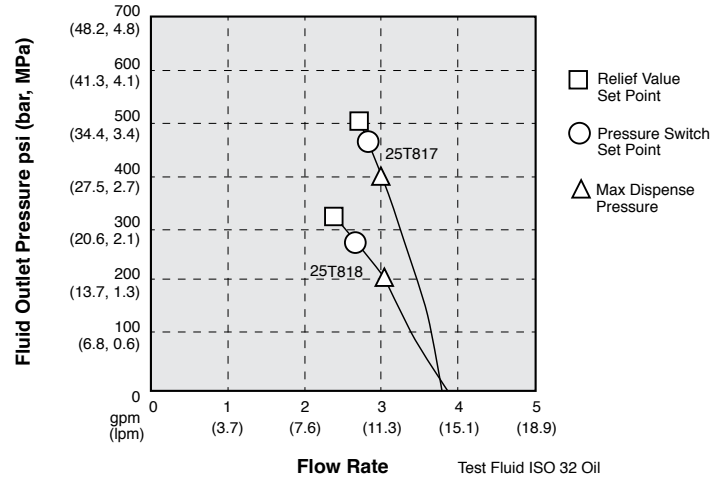


ORDERING OPTIONS

	EGP Transfer Pump Models					EGP On-Demand Pump Models	
Package Part Number	25T819	25T820	25T822	-	-	-	-
Pump Part Number	-	-	-	2005948	25U346	25T817	25T818
Voltage	12 VDC	115 VAC	115 VAC	115 VAC	115 VAC	115 VAC	12 VDC
Hertz	-	60 Hz	60 Hz	60 Hz	60 Hz	60 Hz	-
Motor Type	TENV	ODP	ODP	ODP	TENV - IP55	TENV - IP55	TENV
Horsepower	1/2	1/2	3/4	3/4	1.0	1.5	3/4
Maximum Current (Amps)	30	8.7	9.9	9.9	9.1	14.4	60
Maximum Free Flow Rate gpm (lpm)	3.8 (14.4)	3.9 (14.8)	7.7 (29.1)	7.7 (29.1)	7.7 (29.1)	3.7 (14.0)	3.8 (14.4)
Maximum Pressure psi (bar)	65 (4.5)	65 (4.5)	65 (4.5)	65 (4.5)	120 (8.3)	500 (34.5)	325 (22.4)
Automatic Relief Setting psi (bar)	65 (4.5)	65 (4.5)	65 (4.5)	65 (4.5)	120 (8.3)	500 (34.5)	325 (22.4)
Inlet	1 in NPT	1 in NPT	1 in NPT	1 in NPT	1 in NPT	3/4 in NPT	3/4 in NPT
Outlet	3/4 in NPT	3/4 in NPT	3/4 in NPT	3/4 in NPT	3/4 in NPT	1/2 in NPT	1/2 in NPT
Bung Adapter	260061						
Dispense Kit	133376			-	-	-	-
Suction Kit	133375			-	-	-	-
Wetted Parts	Carbon steel with zinc plating, stainless steel, galvanized steel, aluminum, nitrile, rubber, PVC, PVC cement					Carbon steel with zinc plating, stainless steel, galvanized steel, aluminum, nitrile, rubber	
Weight lb (kg)	25 (11)	22 (10)	25 (11)	25 (11)	25 (11)	36 (16.3)	36 (16.3)
Manual	3A8569	3A8568	3A8568	3A8568	3A8568	3A8570	3A8571

EGP™ TRANSFER AND EGP ON-DEMAND

ORDERING OPTIONS

ACCESSORIES

	Part Number	Description
	133412	Wall mounting bracket, fits all transfer models
	260238	"Y" strainer with 3/4 in NPT female in-line strainer for used oil transfer
	133377	Suction filter
	260124	55 in (1.3 m) PVC suction tube with inlet check valve
	133376	Dispense valve kit
	133375	Suction tube kit, 3/4 in PVC

SPECIALTY PUMPS



HOSE AND CORD REELS

	Page
Hose Reel Selection Guide	212
LDX™ Series Hose Reels	214-215
SDX™ Series Hose Reels	216-221
SD™ Series Cord and Light Reels	222-225
XDX™ Series 10/20 Hose Reels	226-230
XD™ Series 30 Hose Reels	231-235
XD™ Series 40/50 Hose Reels	236-241
XD™ Series 60/70/80 Powered Hose Reels	242-246
Hose Reel Accessories	247-250

HOSE AND CORD REEL SELECTION GUIDE

	Typical Application	Typical Fluid	Hose/Cord Length Options	Enclosed	Reference Pages
 <p>LDX™ Series</p>	<ul style="list-style-type: none"> • Small maintenance shops • Tire maintenance shops • Small fast lubes • Independent repair facilities • Industrial manufacturing facilities 	<ul style="list-style-type: none"> • Petroleum- and synthetic-based oils • Air • Water • Grease • Antifreeze • Windshield washer fluid • Diesel exhaust fluid (DEF) 	<ul style="list-style-type: none"> • 45 ft (14 m) – DEF only • 50 ft (15 m) 	No	214-215
 <p>SDX™ 10 / 20 Series</p>	<ul style="list-style-type: none"> • Car dealerships • Light-/medium-duty truck dealers • Fleet maintenance • Public works garages • Construction vehicle maintenance • Light-utility service trucks 	<ul style="list-style-type: none"> • Petroleum- and synthetic-based oils • Air • Water • Grease • Antifreeze • Windshield washer fluid 	<ul style="list-style-type: none"> • 35 ft (11 m) • 50 ft (15 m) • 65 ft (20 m) 	Optional	216-221
 <p>SD™ Series Cord Reels</p>	<ul style="list-style-type: none"> • Automotive dealerships • Fast lube centers • Service shops • Heavy-duty dealerships • Fleet services facilities • In-plant • Lube trucks • Mining 	–	<ul style="list-style-type: none"> • 35 ft (11 m) • 50 ft (15 m) • 95 ft (29 m) 	Optional	222-225
 <p>DX™ 20 Series</p>	<ul style="list-style-type: none"> • Heavy-duty truck dealers • Fleet maintenance • Mining maintenance • Public works garage • Construction vehicle maintenance • Heavy-duty mobile service trucks • Mining • Lube trucks 	<ul style="list-style-type: none"> • Petroleum- and synthetic-based oils • Air • Water • Grease • Antifreeze • Windshield washer fluid 	<ul style="list-style-type: none"> • 50 ft (15 m) • 65 ft (20 m) 	Optional	226-230
 <p>XD™ 30 Series</p>	<ul style="list-style-type: none"> • Heavy-duty truck dealers • Fleet maintenance • Mining maintenance • Public works garage • Construction vehicle maintenance • Heavy-duty mobile service trucks • Mining • Lube trucks 	<ul style="list-style-type: none"> • Petroleum- and synthetic-based oils • Diesel fuel • Air • Water • Grease • Antifreeze • Windshield washer fluid • Pressure wash • Waste oil evacuation • Diesel exhaust fluid (DEF) 	<ul style="list-style-type: none"> • 35 ft (11 m) • 50 ft (15 m) • 65 ft (20 m) • 75 ft (23 m) 	No	231-235
 <p>XD™ 40 / 50 Series</p>	<ul style="list-style-type: none"> • Heavy-duty truck dealers • Fleet maintenance • Mining maintenance • Public works garages • Construction vehicle maintenance • Heavy-duty mobile service trucks • Agriculture • Lube trucks 	<ul style="list-style-type: none"> • Petroleum- and synthetic-based oils • Diesel fuel • Air • Water • Antifreeze • Waste oil evacuation 	<ul style="list-style-type: none"> • 35 ft (11 m) • 50 ft (15 m) • 75 ft (23 m) • 100 ft (30 m) 	No	236-241
 <p>XD™ 60 / 70 / 80 Series</p>	<ul style="list-style-type: none"> • Heavy-duty truck dealers • Fleet maintenance • Mining maintenance • Public works garages • Construction vehicle maintenance • Heavy-duty mobile service trucks • Agriculture • Lube trucks 	<ul style="list-style-type: none"> • Petroleum- and synthetic-based oils • Diesel fuel • Air • Water • Grease • Waste oil evacuation 	<ul style="list-style-type: none"> • 50 ft (15 m) • 75 ft (23 m) • 100 ft (30 m) • 150 ft (46 m) 	No	242-246



HOSE AND CORD REELS

LDX SERIES HOSE REELS

THE ULTIMATE INDUSTRIAL-GRADE HOSE REEL

Designed with an all-metal frame and specially crafted components; Graco LDX hose reels ensure smooth release and retraction to optimize confidence in cost-conscious smaller garages, independent repair facilities and industrial manufacturing environments.

Adjustable Arm

Easily change to one of six arm positions to fit your application.

External Swivel Housing

Quickly access swivel seal for faster repairs.

Ball Bearing Swivel

Swivel designed with internal ball bearings reduces friction and ensures smooth operation.

Large Hose Capacity with Small Profile

Compact design accommodates up to a 50 foot (15 meter) hose to meet a wide variety of application requirements.

Dual Pedestal Frame

Ribbed metal for increased stability and robustness.



TYPICAL APPLICATIONS

- Industrial manufacturing facilities
- Small maintenance shops
- Tire maintenance shops
- Small fast lubes
- Independent repair facilities

TYPICAL FLUIDS

- Petroleum- and synthetic-based oils (motor, gear and ATF)
- Air
- Water
- Grease
- Antifreeze
- Windshield washer fluid
- Diesel exhaust fluid (DEF)


TECHNICAL SPECIFICATIONS

Operating Temperature Range	
Air/Water/Antifreeze/Windshield Washer Fluid	14.5°F to 149°F (-26°C to 65°C)
DEF	-40°F to 158°F (-40°C to 70°C)
Oil	-40°F to 212°F (-40°C to 100°C)
Grease	-40°F to 212°F (-40°C to 100°C)
Wetted Parts	
Air/Water/Antifreeze/Windshield Washer Fluid	EPDM, stainless steel, fluorocarbon (FKM)
DEF	Hybrid polymer, brass, nitrile rubber
Oil	Zinc-plated steel, brass, polyurethane, nitrile rubber
Grease	Zinc-plated steel, brass, nitrile rubber
Sound Pressure Level	80 dB(A)
Sound Power Level	87 dB(A)
Instruction Manual	3A8216




DIMENSIONS


A	3.5 in (89 mm)
B	7.5 in (191 mm)
C	4.9 in (125 mm)
D	8.7 in (221 mm)
E	19.0 in (483 mm)
F	9.4 in (239 mm)
G	17.5 in (445 mm)



TYPICAL MOUNTING CONFIGURATIONS



Bench Mount



ORDERING OPTIONS

LDX REELS

Part Number	Fluid	Hose		Connection Size		Maximum Pressure PSI
		ID (in)	Length (ft)	Inlet (in)	Outlet (in)	
HEL010	Air/Water/Antifreeze/Windshield Washer Fluid	3/8	50	3/8 NPT	3/8 NPT	300
HEL012	Air/Water/Antifreeze/Windshield Washer Fluid	3/8	50	3/8 NPT	1/4 NPT	300
HEL015	DEF	1/2	45	1/2 BSPT	1/2 BSPT	150
HEM004	Oil	1/2	50	1/2 NPT	1/2 NPT	1,500
HEH006	Grease	3/8	50	3/8 NPT	3/8 NPT	4,060

INLET KITS

Part Number	Fluid
25U369	Air/Water/Antifreeze/Windshield Washer Fluid
25U370	DEF
25U371	Oil
25U372	Grease

ACCESSORIES

Part Number	Description
18F444	1/2 in BSPT to 3/4 in hose barb adapter
18F445	1/2 in to 3/4 in adapter, BSPT

SDX SERIES HOSE REELS

HIGH-QUALITY PERFORMANCE AND VERSATILITY

Improve performance along with the look of any environment with Graco's flagship SDX hose reel. Built with specially crafted components, including a rigid metal frame and spool and effortless retraction swivels, it's available in five colors. An easy-to-service swivel cartridge design simplifies maintenance. Retraction and recoil are uniform and consistent every time.

Durable Finish

Baked-on enamel finish (five colors available) protects reel from corrosion.

Full-Flow Swivel

Maximize material flow with minimal pressure drop for faster fills to get more vehicles through your shop.

Low-Friction Cartridge Swivel

Provides smooth reel performance with an easy-to-replace swivel cartridge, simplifying repairs.

Adjustable Arm

Easily change to one of six arm positions to fit your application.

Heavy-Duty Spring

Powerful retraction performance ensures recoils are uniform and consistent every time.



Reel arm shown in tank/bench mount position.

Large Hose Capacity with Small Profile

Compact pedestal and spool fits into tight spaces and can accommodate 35-65 foot (10.7-19.8 meters) hose (NPT air/water) capacity for a wide variety of applications.

TYPICAL APPLICATIONS

- Car dealerships
- Light-/medium-duty truck dealers
- Fleet maintenance
- Public works garages
- Construction vehicle maintenance
- Light-utility service trucks

TYPICAL FLUIDS

- Petroleum- and synthetic-based oils (motor, gear and ATF)
- Air
- Water
- Grease
- Antifreeze/coolant
- Windshield washer fluid


TECHNICAL SPECIFICATIONS

Operating Temperature Range	
Air/Water/Antifreeze/Windshield Washer Fluid	-20°F to 190°F (-28°C to 87°C)
Oil	-20°F to 190°F (-28°C to 87°C)
Grease	-40°F to 200°F (-40°C to 93°C)
Wetted Parts	
Air/Water/Antifreeze/Windshield Washer Fluid	Zinc-plated steel, stainless steel, anodized aluminum, nitrile rubber
Oil	Zinc-plated steel, anodized aluminum, nitrile rubber
Grease	Zinc-plated steel, nitrile rubber, steel
Weight	52 lb (23.5 kg)
Sound Pressure Level	80 dB(A)
Sound Power Level	87 dB(A)
Instruction Manual	3A8626




DIMENSIONS

	SDX 10	SDX 20
A	7.0 in (177 mm)	7.0 in (177 mm)
B	16.2 in (412 mm)	18.1 in (460 mm)
C	21.0 in (533 mm)	23.4 in (594 mm)
D	17.1 in (435 mm)	19.2 in (488 mm)
E	19.5 in (495 mm)	21.8 in (554 mm)
F	22.5 in (571 mm)	25.2 in (640 mm)

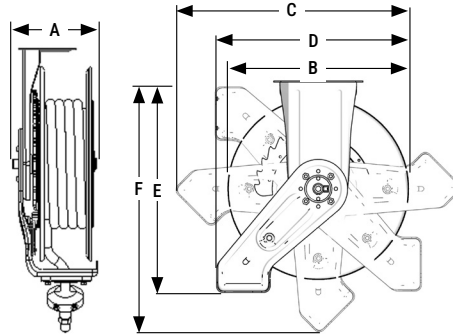


TYPICAL MOUNTING CONFIGURATIONS


Overhead Mount



Wall Mount



Bench/Truck Mount

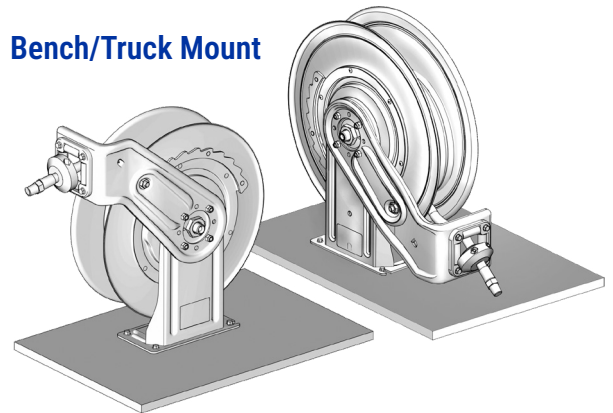

HOSE AND CORD REELS

Available in
5 COLORS
Consult factory for lead times

Metallic Blue (B)



Black (D)



Red (C)



SDX10 &
SDX20

Yellow (F)



White (A)



SDX20
ONLY

SDX SERIES HOSE REELS

ORDERING OPTIONS

SDX 10/20 Reel Assembly Ordering Guide

SDX Series reels are available in five colors. Use the chart below to determine the correct part number to order. The last character of each part number indicates the hose reel color.

Reel Color	Identifier
White	A
Metallic Blue	B
Red	C
Black	D
Yellow	F

ORDER EXAMPLE: Arm in overhead mount position, SDX 20, oil, 1/2 in ID hose, 50 ft hose length

- 1 Select your reel position:** SDM65#
- 2 Select your reel color:** Metallic Blue = "B"
(from Reel Assembly Ordering Guide – opposite)

Order Part Number: **SDM65B**



ARM IN OVERHEAD MOUNT POSITION

Assembled with hose, ball stop kit and roller guide. **Required hose inlet kit sold separately.**

	Reel Size	Fluid	Hose		Connection Size		Maximum Pressure psi (bar)	Assembly Part Number	Recommended Hose Inlet Kit
			ID in (mm)	Length ft (m)	Inlet in (mm)	Outlet in (mm)			
	SDX 10	Air/Water/Antifreeze/Windshield Washer Fluid	3/8 (10)	35 (11)	1/2 (13)	3/8 (10)	300 (20.7)	SDL23#	218549
			3/8 (10)	50 (15)	1/2 (13)	3/8 (10)	300 (20.7)	SDL25#	
			1/2 (13)	35 (11)	1/2 (13)	1/2 (13)	300 (20.7)	SDL33#	
	SDX 20		3/8 (10)	65 (20)	1/2 (13)	3/8 (10)	300 (20.7)	SDL56#	
			1/2 (13)	50 (15)	1/2 (13)	1/2 (13)	300 (20.7)	SDL65#	
			SDX 10	Oil	1/2 (13)	35 (11)	1/2 (13)	1/2 (13)	
SDX 20	1/2 (13)	50 (15)			1/2 (13)	1/2 (13)	2,000 (138)	SDM65#	
SDX 20	Grease	3/8 (10)	50 (15)	3/8 (10)	1/4 (6)	4,800 (331)	SDH55#	218550	

ARM IN TANK/BENCH MOUNT POSITION

Assembled with hose, ball stop kit and roller guide. **Required hose inlet kit sold separately.**

	Reel Size	Fluid	Hose		Connection Size		Maximum Pressure psi (bar)	Assembly Part Number	Recommended Hose Inlet Kit
			ID in (mm)	Length ft (m)	Inlet in (mm)	Outlet in (mm)			
	SDX 20	Oil	1/2 (13)	50 (15)	1/2 (13)	1/2 (13)	2,000 (138)	SDM6HB	218549




ORDERING OPTIONS


BARE REELS

ARM IN OVERHEAD MOUNT POSITION

Required hose inlet kit sold separately. Fluid hose not included.

	Reel Size	Fluid	Hose (Not Included)		Connection Size		Maximum Pressure psi (bar)	Assembly Part Number	Recommended Hose Inlet Kit
			ID in (mm)	Length ft (m)	Inlet in (mm)	Outlet in (mm)			
	SDX 20	Air/Water/Antifreeze/Windshield Washer Fluid	3/8 (10)	65 (20)	1/2 (13)	1/2 (13)	300 (20.7)	SDL6D#	218549
			1/2 (13)	50 (15)	1/2 (13)	1/2 (13)	300 (20.7)	SDL6D#	
	SDX 20	Oil	1/2 (13)	50 (15)	1/2 (13)	1/2 (13)	2,000 (138)	SDM6D#	
	SDX 20	Grease	3/8 (10)	50 (15)	3/8 (10)	3/8 (10)	5,000 (345)	SDH5D#	

SDX 10 OIL REEL PACKAGES




	Reel Size	Fluid	Valve Type	Enclosure	Package Number	Package Includes			
						Reel Assembly	Enclosure	Hose Inlet Kit	Meter
	SDX 10	Oil	SDM8 Manual Meter with Rigid Extension	No	24E001	SDM33B	-	218549	25M404
				Yes	24D996	SDM33B	24A217	218549	25M404
	SDX 10	Oil	SDM8 Manual Meter with Flexible Extension	No	24E002	SDM33B	-	218549	25M406
				Yes	24D997	SDM33B	24A217	218549	25M406
			None	Yes	24D995	SDM33B	24A217	218549	-

HOSE AND CORD REELS

SDX SERIES HOSE REELS

ORDERING OPTIONS


SDX 10 AIR/WATER REEL PACKAGES

	Reel Size	Fluid	Valve Type	Enclosure	Package Number	Package Includes				
						Reel Assembly	Enclosure	Hose Inlet Kit	Valve	Fitting
	SDX 10	Water	Water Bib Dispense Valve	No	24D999	SDL23B	-	218549	180685	150287
				Yes	24D993	SDL23B	24A217	218549	180685	150287
					24D994	SDL33B	24A217	218549	180685	159842
	SDX 10	Air	Tire Chuck Valve	No	24D998	SDL23B	-	218549	218545	-
				Yes	24D992	SDL23B	24A217	218549	218545	-
	SDX 10	Air/Water	None	Yes	24D989	SDL23B	24A217	218549	-	-
					24D990	SDL25B	24A217	218549	-	-
					24D991	SDL33B	24A217	218549	-	-

ACCESSORIES


ENCLOSURE KITS FOR ONE REEL

Open mounting accommodates up to six reels. Includes all parts necessary to mount on wall or overhead. Requires mounting channel.

	Reel Size	White	Metallic Blue	Red	Black	Dark Blue	Yellow	Required End-Caps (set of 2)
	SDX 10	24A217	24A940	24A941	24A942	24A943	24A944	24A950
	SDX 20	24A218	24A945	24A946	24A947	24A948	24A949	24A951


HOSE INLET KITS

A hose inlet kit is required when ordering an SDX reel.

	Maximum Working Pressure psi (bar)	Size in (mm)	Length ft (m)	Part Number
	2,000 (137)	1/2 (13)	2 (0.6)	218549
	4,000 (276)	3/8 (10)		218550
	5,000 (345)	1/4 (6)		224417

BALL STOP KITS

SDX reel packages include ball stop kits. Items below are available for bare reels and as replacement parts.

	Hose Inner Diameter (ID) Size	Part Number
	1/4 in (6.4 mm)	222225
	1/4 in to 3/8 in (6.4 mm to 9.5 mm)	218340
	3/8 in to 1/2 in (9.5 mm to 12.7 mm)	218341
	5/8 in (15.9 mm)	237872






SDX SERIES HOSE REEL ACCESSORIES

ORDERING OPTIONS

MOUNTING CHANNELS


Accommodates up to six reels. Includes all parts necessary to mount on wall or overhead.

	Description	1 Reel	2 Reels	3 Reels	4 Reels	5 Reels	6 Reels
	Enclosed Reel Mounting Channel	203521	203522	203523	203524	203525	203526
	Open Reel Mounting Channel	24A934	24A935	24A936	24A937	24A938	24A939
	I-Beam Mounting Bracket*	204741 (x 2)			204741 (x 3)		

*Secures mounting channel to I-beam without drilling – 2 are required for 1-3 reels, and 3 are required for 4-6 reels.


SWIVEL MOUNTING BRACKET

Allows reel to swivel 120° with two lockable positions.


	Part Number	Description
	24N444	Swivel mounting bracket for installing SDX 10 reels

EASY SLIDE-IN MOUNT

Allows reel to slide in and out of mount for easy installation.

	Part Number	Description
	24H193	Overhead or wall slide-in mount for SDX 10 or SDX 20 reels

RETROFIT ADAPTER KITS

	Part Number	Description
	24C100	Includes all parts to mount an SDX 10 hose reel to an existing 250 series mounting pattern with enclosure

SD SERIES CORD AND LIGHT REELS

QUALITY CORD AND LIGHT REELS

Organize your work space for a safer, more productive work environment. Make Graco your single source for your entire reel bank.

Durable Frame in Two Sizes

Choose from the heavy-duty steel construction of the SD Series 5 or 10.

Multiple Cord Lengths

- Choose from 35, 50 and 95 foot (11, 15, 29 meter) options to fit your shop perfectly.
- Features a 5 foot lead-in cable.

Adjustable Arm

- Easily change the arm position to fit more applications.
- Works on walls, overhead or bench mounts.

Heavy-Duty Pedestal

High-strength steel construction with rolled edges and ribbed stress points that won't flex or twist.

Multiple Configurations Available

- Comes with or without receptacles so you can configure it for your specific needs.
- Light reels come in your choice of fluorescent or LED with optional tool tap receptacle.



UL/CSA Approved

TYPICAL APPLICATIONS

- Automotive dealerships
- Fast lube centers
- Service shops
- Heavy-duty dealerships
- Fleet services facilities
- In-plant
- Lube trucks
- Mining


TECHNICAL SPECIFICATIONS

Operating Temperature Range			
Cord Reels		-22°F to 122°F (-30°C to 50°C)	
Light Reels		-4°F to 104°F (-20°C to 40°C)	
Weight without Accessories			
120V	SD 5	12 AWG, Length 50 ft	25.4 lb
		16 AWG, Length 95 ft	46.3 lb
	SD 10	12 AWG, Length 95 ft	51.8 lb
Instruction Manual		3A2592	



DIMENSIONS




	SD Series 5	SD Series 10
A	3.5 in (89 mm)	3.5 in (89 mm)
B	6.38 in (162 mm)	7.5 in (191 mm)
C	4.7 in (120 mm)	4.7 in (120 mm)
D	7.48 in (190 mm)	9 in (229 mm)
E	14.8 in (376 mm)	19.5 in (498 mm)
F	6.6 in (168 mm)	7 in (177 mm)
G	13.84 in (352 mm)	17.5 in (445 mm)



ORDERING OPTIONS

SD CORD AND LIGHT REELS – 120 VOLT

120 volt cord and light reels have a black finish and are ETL approved to US and CSA standards.

	Accessory	Reel Size	AWG	Amp	Cord Length	Insulation	Part Number
	Single Industrial Receptacle	SD 5	12	20	50 ft (15 m)	SJ00W	24Y863
		SD 10	12	18	95 ft (29 m)	SJ00W	24Y882
	Tri-Plug GFCI Industrial Receptacle	SD 5	12	15	50 ft (15 m)	SJ00W	24Y864
		SD 10	12	15	95 ft (29 m)	SJ00W	24Y883
	LED Light with In-line Tool Tap	SD 5	16	12	50 ft (15 m)	SJT0W	24Y872
		SD 10	16	10	95 ft (29 m)	SJT0W	24Y887

SD SERIES CORD AND LIGHT REEL ACCESSORIES

ORDERING OPTIONS




ENCLOSURE KITS

Includes an enclosure for one reel. A set of end-caps are required per single or bank of reels. Requires you to order Enclosed Reel Mounting Channel separately. For mounting SD 5 or SD 10 reels in size 20 enclosures, please see Adapter Kits on page 227.

	Reel Size	White	Metallic Blue	Red	Black	Dark Blue	Yellow	Required End-Caps (set of 2)
	SD 5 with size 10 enclosure	24N690	24N682	24N683	24N684	24N691	24N685	24A950
	SD 10 with size 10 enclosure	24A217	24A940	24A941	24A942	24A943	24A944	24A950

MOUNTING CHANNELS

Accommodates up to six reels. Includes all parts necessary to mount on wall or overhead.

	Description	Reel Size	1 Reel	2 Reels	3 Reels	4 Reels	5 Reels	6 Reels
	Enclosed Reel Mounting Channel	SD 5 and SD 10	203521	203522	203523	203524	203525	203526
	Open Reel Mounting Channel	SD 5	24N674	24N675	-	-	-	-
		SD 10	24A934	24A935	24A936	24A937	24A938	24A939
	I-Beam Mounting Bracket*	SD 5 and SD 10	204741 (x 2)			204741 (x 3)		


*Secures mounting channel to I-beam without drilling - 2 are required for 1-3 reels, and 3 are required for 4-6 reels.



ORDERING OPTIONS


SWIVEL MOUNTING BRACKET

Allows reel to swivel 120° with two lockable positions.


	Reel Size	Part Number	Description
	SD 5	24N814	Swivel mounting bracket for installation
	SD 10	24N444	Swivel mounting bracket for installation

WALL/OVERHEAD MOUNTING BRACKET

Allows you to slide the reel in and out for easy installation.


	Reel Size	Part Number	Description
	SD 5	24N686	Wall/overhead easy mount plate kit
	SD 10	24H193	Wall/overhead easy mount plate kit

ADAPTER KITS

	Part Number	Description
	24P164	Spacer bracket for mounting a size 5 reel to an existing size 10 enclosure
	24P880	Spacer bracket for mounting a size 5 reel to an existing size 20 enclosure
	24P881	Spacer bracket for mounting a size 10 reel to an existing size 20 enclosure
	16N883	Clamping plate to mount a size 5 reel to an existing SD Series open channel

HANDS-FREE MAGNETIC CLIP

Non-marring cover won't scratch vehicle finish. Snap onto light tube for hands-free operation.

	Part Number	Description
	16P999	Magnetic clip for light tube

XDX SERIES HOSE REELS

20

PERFORMANCE IN THE MOST DEMANDING APPLICATIONS

The heavy-duty XDX hose reels are designed to handle fluid delivery tasks in the harshest, most challenging environments. Built with specially crafted components to extend performance for many years, the hose reel includes a robust heavy-gauge, dual-pedestal metal frame; steel spool; sealed components; and unique swivel design to transport fluids consistently and safely without fail.

Large Hose Capacity with Small Profile

Compact pedestal and spool fits into tight spaces and can accommodate 35-65 foot (10.7-19.8 meters) hose capacity for a wide variety of applications.

Low-Friction Cartridge Swivel

Provides smooth reel performance with an easy-to-replace swivel cartridge, simplifying repairs.

Full-Flow Swivel

Maximize material flow with minimal pressure drop for faster fills to get more vehicles through your shop.



Durable Finish

Baked-on enamel finish (four colors available) protects reel from corrosion.

Optional Adjustable Arm

Easily change to one of six arm positions to fit your application. Order with arm (XD models) or without (XN models).

Heavy-Duty Adjustable Spring

Powerful retraction performance that allows you to easily increase or decrease spring tension while the reel is pressurized with fluid.

TYPICAL APPLICATIONS

- Heavy-duty truck dealers
- Fleet maintenance
- Mining maintenance
- Public works garage
- Construction vehicle maintenance
- Heavy-duty mobile service trucks
- Mining
- Lube trucks

TYPICAL FLUIDS

- Petroleum- and synthetic-based oils (motor, gear and ATF)
- Air
- Water
- Grease
- Antifreeze/coolant
- Windshield washer fluid

TECHNICAL SPECIFICATIONS


Operating Temperature Range	
Air/Water/Antifreeze/Windshield Washer Fluid	-20°F to 190°F (-28°C to 87°C)
Oil	-20°F to 190°F (-28°C to 87°C)
Grease	-40°F to 200°F (-40°C to 93°C)
Wetted Parts	
Air/Water/Antifreeze/Windshield Washer Fluid	Zinc-plated steel, stainless steel, anodized aluminum, nitrile rubber
Oil	Zinc-plated steel, anodized aluminum, nitrile rubber
Grease	Zinc plated steel, polyurethane, steel
Weight	
HS Models (With Adjustable Arm)	59 lb (26.5 kg)
HN Models (Without Arm)	52 lb (23.5 kg)
Sound Pressure Level	78 dB(A)
Sound Power Level	88 dB(A)
Instruction Manual	3A8626



DIMENSIONS


XD Models (with adjustable arm)

	XDX 20
A	7.5 in (196 mm)
B	18.1 in (460 mm)
C	23.4 in (594 mm)
D	20.0 in (508 mm)
E	21.0 in (533 mm)
F	25.2 in (640 mm)

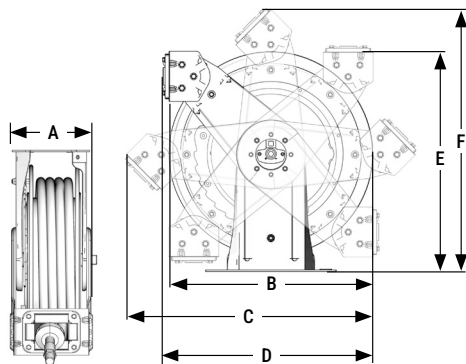


TYPICAL MOUNTING CONFIGURATIONS


Overhead Mount



Wall Mount



Bench/ Truck Mount



Available in
4 COLORS
Consult factory for lead times

Metallic Blue (B)



Yellow (F)



Black (D)



White (A)



XDX SERIES HOSE REELS

20

ORDERING OPTIONS

XDX 20 Reel Assembly Ordering Guide

XDX Series reels are available in three colors. Use the chart below to determine the correct part number to order. The last character of each part number indicates the hose reel color.

Reel Color	Identifier
White	A
Metallic Blue	B
Black	D
Yellow	F

ORDER EXAMPLE: Arm in bench/truck mount position, XDX 20, oil, 1/2 in ID hose, 50 ft hose length

- 1 Select your reel position:** XDM65#
- 2 Select your reel color:** Black = "D"
(from Reel Assembly Ordering Guide – opposite)

Order Part Number: **XDM65D**



XD MODELS (WITH ADJUSTABLE ARM)

REEL ASSEMBLIES

Assembly includes hose, ball stop kit and roller guide. **Required hose inlet kit sold separately.**

	Reel Size	Fluid	Hose (Included)		Connection Size		Maximum Pressure psi (bar)	Assembly Part Number	Recommended Hose Inlet Kit
			ID in (mm)	Length ft (m)	Inlet	Outlet			
	XDX 20	Air/Water/Antifreeze/Windshield Washer Fluid	3/8 (10)	65 (20)	1/2 NPSM(M)	3/8 NPT(M)	300 (20.7)	XDL56#	218549
			1/2 (13)	50 (15)	1/2 NPSM(M)	1/2 NPT(M)	300 (20.7)	XDL65#	
		Oil	1/2 (13)	50 (15)	1/2 NPSM(M)	1/2 NPT(M)	2,000 (138)	XDM65#	
		Grease	3/8 (10)	50 (15)	3/8 NPSM(M)	1/4 NPT(M)	4,800 (331)	XDH55#	

BARE REELS

Required hose inlet kit sold separately. Fluid hose not included.

	Reel Size	Fluid	Hose (Not Included)		Connection Size		Maximum Pressure psi (bar)	Part Number	Recommended Hose Inlet Kit
			ID in (mm)	Length ft (m)	Inlet	Outlet			
	XDX 20	Air/Water/Antifreeze/Windshield Washer Fluid	1/2 (13)	50 (15)	1/2 NPSM(M)	1/2 NPSM(F)	300 (20.7)	XDL6D#	218549
		Oil	1/2 (13)	50 (15)	1/2 NPSM(M)	1/2 NPSM(F)	2,000 (138)	XDM6D#	
		Grease	3/8 (10)	50 (15)	3/8 NPSM(M)	3/8 NPSM(F)	8,000 (552)	XDH5D#	218550




ORDERING OPTIONS

ACCESSORIES


BALL STOP KITS

XDX HS models include ball stop kits. Order separately if ordering a bare reel or if needed with HN models.

	Part Number	Description
	222225	For 1/4 in (6 mm) ID hose (not compatible with XD 30, 700 or 750)
	218340	For 1/4 in to 3/8 in (6 mm to 10 mm) ID hose (not for use with XD 30, 700 or 750)
	218341	0.782 in ID used for 3/8 in and 1/2 in (10 mm and 13 mm) hose (not compatible with XD 30, 700 or 750)
	237872	1.0 in ID used for 5/8 in (16 mm) hose
	237873	1.123 in ID used for 3/4 in (19 mm) hose
	237874	1.374 in ID used for 1 in (25 mm) hose
	24D132	For 3/8 in (10 mm) ID hose
	24D133	For 1/2 in (13 mm) ID hose



HOSE INLET KITS

A hose inlet kit is required when ordering an XDX reel.

	Maximum Working Pressure psi (bar)	Size in (mm)	Length ft (m)	Part Number
	2,000 (137)	1/2 (13)	2 (0.6)	218549
	4,000 (276)	3/8 (10)		218550
	5,000 (345)	1/4 (6)		224417

MOUNTING CHANNELS

Accommodates up to six reels. Includes all parts necessary to mount on wall or overhead.

	Description	1 Reel	2 Reels	3 Reels	4 Reels	5 Reels	6 Reels
	Enclosed Reel Mounting Channel	24N323	24N324	24N325	24N326	24N327	24N328
	Description	1 Reel	2 Reels	3 Reels	4 Reels	5 Reels	6 Reels
	Open Reel Mounting Channel	24A219	24A220	24A221	24A222	24A222	24A222
	Description						
	I-Beam Mounting Bracket*	204741 (x 2)			204741 (x 3)		

*Secures mounting channel to I-beam without drilling – 2 are required for 1-3 reels, and 3 are required for 4-6 reels.


XDX SERIES HOSE REEL ACCESSORIES

20


ORDERING OPTIONS

ENCLOSURE KITS FOR ONE REEL


Open mounting accommodates up to six reels. Includes all parts necessary to mount on wall or overhead. Requires Enclosed Reel Mounting Channel.

	Reel Size	White	Metallic Blue	Red	Black	Yellow	Required End-Caps (set of 2)
	XDX 10	–	24N332	–	24N334	24N336	24A950
	XDX 20	24N337	24N339	24N340	24N341	24N343	24A951


RETROFIT ADAPTER KIT

	Part Number	Description
	24A224	Includes all parts to mount hose reel to existing 500 series mounting pattern without enclosure
	24P914	Includes all parts to convert XDX 20 hose reels to fit existing 500 series enclosures

VALVE HANGER KIT

	Part Number	Description
	224444	Mounts to side of reel to allow hanging of non-metered and high-flow dispensing valves

SELF-ADHESIVE IDENTIFICATION LABEL SET

	Part Number	Description
	180698	Set includes: 1 in x 5 in (25.4 mm x 127 mm) hose reels labels for Antifreeze, Water, SAE 5-40, SAE 10-40, SAE 20W, Hydraulic, Gear, SAE 10W, SAE 10-30, SAE 30W, Dexron, Air, Chassis, ATF


XD SERIES HOSE REELS

30 / 30 HN



HIGH CAPACITY REEL

Used in applications requiring longer-range dispense and higher capacity than the standard XDX 20 series. Ideal for use on mobile service trucks, heavy construction and industrial plants.

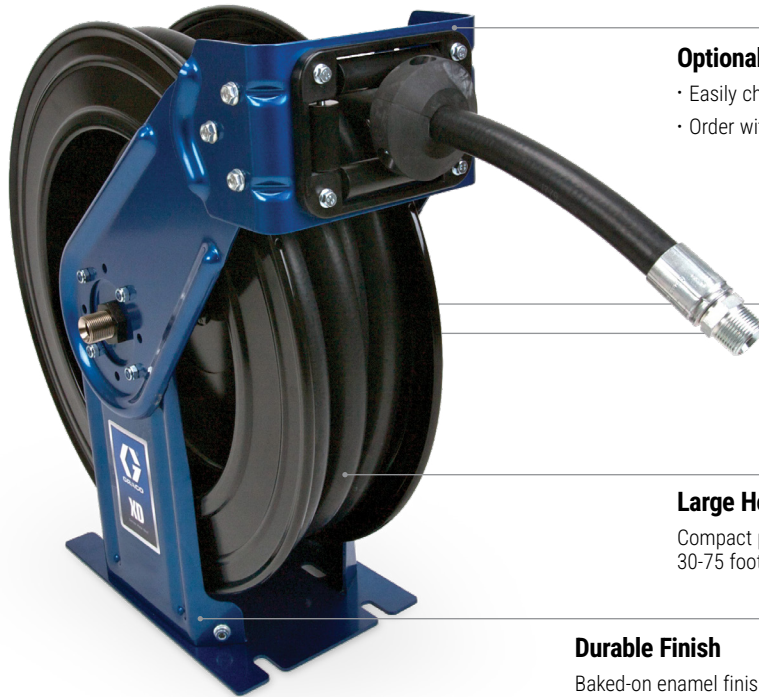

Optional Adjustable Arm

- Easily change to one of seven arm positions to fit your application.
- Order with arm (HS models) or without (HN models).

Full-Flow Swivel

Maximize material flow with minimal pressure drop for faster fills to get more vehicles through your shop.

Spring Adjustment

Increase or decrease spring tension while reel is pressurized with fluid.

Large Hose Capacity with Small Profile

Compact pedestal and spool fits into tight spaces and can accommodate 30-75 foot (9.1-22.8 meters) hose capacity for a wide variety of applications.

Durable Finish

Baked-on enamel finish (four colors available) protects reel from corrosion.

TYPICAL APPLICATIONS

- Heavy-duty truck dealers
- Fleet maintenance
- Mining maintenance
- Public works garage
- Construction vehicle maintenance
- Heavy-duty mobile service trucks
- Mining
- Lube trucks

TYPICAL FLUIDS

- Petroleum- and synthetic-based oils (motor, gear and ATF)
- Diesel fuel
- Air
- Water
- Grease
- Antifreeze
- Windshield washer fluid
- Pressure wash
- Waste oil evacuation
- Diesel exhaust fluid (DEF)

TECHNICAL SPECIFICATIONS


Operating Temperature Range	
Air/Water/Antifreeze/Windshield Washer Fluid	-40°F to 180°F (-40°C to 82°C)
Oil	-40°F to 180°F (-40°C to 82°C)
Grease	-40°F to 180°F (-40°C to 82°C)
Pressure Wash	-20°F to 225°F (-28°C to 107°C)
Fuel/Evacuation	-40°F to 120°F (-40°C to 49°C)
Diesel Exhaust Fluid (DEF)	12°F to 140°F (-11°C to 60°C)
Wetted Parts (Bare Reel Only)	
Air/Water/Antifreeze/Windshield Washer Fluid	Nickel plated carbon steel, aluminum, Buna-N rubber, UHMWPE
Oil	Nickel plated carbon steel, aluminum, Buna-N rubber, UHMWPE
Grease	Nickel plated stainless steel, Buna-N rubber, UHMWPE
Pressure Wash	Nickel plated stainless steel, Buna-N rubber, UHMWPE
Fuel/Evacuation	Nickel plated carbon steel, aluminum, Buna-N rubber, UHMWPE
Diesel Exhaust Fluid (DEF)	Zinc plated steel, polyurethane, steel
Weight (Without Hose)	98 lb (44.5 kg)
Sound Pressure Level	85.8 dB(A)
Sound Power Level	94.9 dB(A)
Instruction Manual	3A0138
Wetted Parts	Carbon steel, nickel plated cast iron, Buna-N rubber, FKM UHMWPE
Maximum Recommended Mounting Height	15 ft (4.6 m)
Sound Pressure Level	77.6 dB(A)
Sound Power Level	86.8 dB(A)

XD SERIES HOSE REELS

30 / 30 HN


DIMENSIONS

	HS Models (with Adjustable Arm)	HN Models (without Arm)
A	9.0 in (229 mm)	7.5 in (196 mm)
B	21.5 in (546 mm)	18.1 in (460 mm)
C	26.0 in (659 mm)	23.4 in (594 mm)
D	22.1 in (562 mm)	20.0 in (508 mm)
E	23.1 in (588 mm)	21.0 in (533 mm)
F	27.6 in (701 mm)	25.2 in (640 mm)

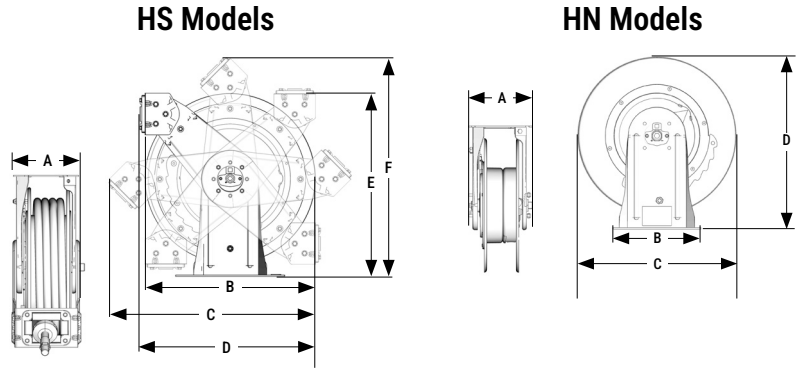


TYPICAL MOUNTING CONFIGURATIONS


Overhead Mount




Wall Mount

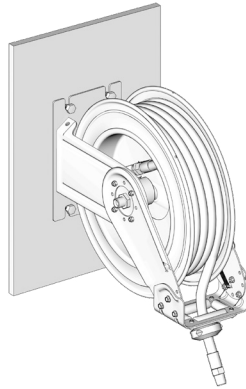

Bench/
Truck Mount

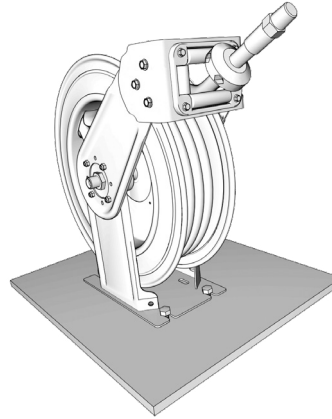

Truck Mount with Remote
Mounted Roller Guide



Metallic Blue (B)
Standard In-Stock Color



Available in
3 COLORS
Consult factory for lead times

Yellow (F)



Black (D)





ORDERING OPTIONS

XD 30 Reel Assembly Ordering Guide

XD Series reels are available in three colors. Use the chart below to determine the correct part number to order. The last character of each part number indicates the hose reel color.

Reel Color	Identifier
Metallic Blue	B
Yellow	F
Black*	D

*Black not available in HN models

ORDER EXAMPLE:

Arm in overhead mount position, XD 30, oil, 3/4 in ID hose, 50 ft hose length

1 Select your reel position: HSMD5#

2 Select your reel color: Metallic Blue = "B"
(from Reel Assembly Ordering Guide – opposite)


Order Part Number: **HSMD5B**



HS MODELS (WITH ADJUSTABLE ARM)


REEL ASSEMBLIES

Assembly includes hose, ball stop kit and roller guide. **Required hose inlet kit sold separately.**

	Fluid	Hose (Included)		Connection Size		Maximum Pressure psi (bar)	Reel, Hose and Ball Stop Assembly Part Number	Recommended Hose Inlet Kit
		ID in (mm)	Length ft (m)	Inlet	Outlet			
	Air/Water/Antifreeze/Windshield Washer Fluid	1/2 (13)	75 (23)	1/2 NPSM(M)	1/2 NPT(M)	300 (20.7)	HSLC8#	218549
		3/4 (19)	50 (15)	3/4 NPSM(M)	3/4 NPT(M)	300 (20.7)	HSLD5#	24E284
	Oil	1/2 (13)	75 (23)	1/2 NPSM(M)	1/2 NPT(M)	1,500 (103)	HSMC8#	218549
		3/4 (19)	50 (15)	3/4 NPSM(M)	3/4 NPT(M)	1,250 (86)	HSMD5#	24E284
	Grease	1/2 (13)	50 (15)	1/2 NPSM(M)	1/2 NPT(M)	5,000 (345)	HSHC5#	24E283
		3/8 (10)	75 (23)	1/2 NPSM(M)	3/8 NPT(F)	5,000 (345)	HSHB7#	24E283
	Pressure Wash	3/8 (10)	75 (23)	1/2 NPSM(M)	3/8 NPT(M)	4,000 (276)	HSPB8#	24E283
	DEF	3/4 (19)	50 (15)	3/4 BSPP(M)	3/4 BSPP ORB	50 (3.4)	HSDD5#	24W250 (BSPP)

BARE REELS

Required hose inlet kit sold separately.

	Fluid	Hose (Not Included)		Connection Size		Maximum Pressure psi (bar)	Part Number	Recommended Hose Inlet Kit
		ID in (mm)	Length ft (m)	Inlet in (mm)	Outlet in (mm)			
	Oil	1/2 (13)	75 (23)	1/2 (13) (m)	1/2 (13) (m)	2,000 (138)	HSMCF#	218549
		3/4 (19)	50 (15)	3/4 (19) (m)	3/4 (19) (m)	2,000 (138)	HSMDD#	24E284
	Grease	1/2 (13)	50 (15)	1/2 (13) (m)	1/2 (13) (m)	5,000 (345)	HSHCD#	24E283
	Pressure Wash	3/8 (10)	75 (23)	1/2 (13) (m)	3/8 (10) (m)	4,000 (276)	HSHFF#	24E283
	DEF	3/4 (19)	50 (15)	3/4 (19) (m)	3/4 (19) ORB	50 (3.4)	HSDDD#	24W250 (BSPP)
	Fuel/Oil Evacuation	1 (13)	30 (9)	3/4 (19) (m)	1 (13) (m)	125 (8.6)	HSLEE#	24E285

XD SERIES HOSE REELS


30 / 30 HN

ORDERING OPTIONS

HN MODELS (WITHOUT ADJUSTABLE ARM)

REELS WITH HOSE


Required hose inlet kit sold separately.



Fluid	Hose (Included)		Connection Size		Maximum Pressure psi (bar)	Reel and Hose Assembly Part Number	Recommended Hose Inlet Kit
	ID in (mm)	Length ft (m)	Inlet	Outlet			
Air/Water/Antifreeze/ Windshield Washer Fluid	1/2 (13)	75 (23)	1/2 NPSM(M)	1/2 NPT(M)	300 (20.7)	HNLC8#	218549
	3/4 (19)	50 (15)	3/4 NPSM(M)	3/4 NPT(M)	300 (20.7)	HNLD5#	24E284
Oil	1/2 (13)	75 (23)	1/2 NPSM(M)	1/2 NPT(M)	1,500 (103)	HNMC8#	218549
	3/4 (19)	50 (15)	3/4 NPSM(M)	3/4 NPT(M)	1,250 (86)	HNMD5#	24E284
Grease	3/8 (10)	75 (23)	1/2 NPSM(M)	3/8 NPT(F)	5,000 (345)	HNHB7#	24E283
Pressure Wash	3/8 (10)	75 (23)	1/2 NPSM(M)	3/8 NPT(M)	4,000 (276)	HNPB8#	24E283
	1/2 (13)	50 (15)	1/2 NPSM(M)	1/2 NPT(M)	4,500 (310)	HNPC5#	24E283

BARE REELS


Required hose inlet kit sold separately.



Fluid	Hose (Not Included)		Connection Size		Maximum Pressure psi (bar)	Part Number	Recommended Hose Inlet Kit
	ID in (mm)	Length ft (m)	Inlet in (mm)	Outlet in (mm)			
Oil	3/4 (19)	50 (15)	3/4 (19) (m)	3/4 (19) (m)	2,000 (138)	HNMD5#	24E284
Grease	1/2 (13)	50 (15)	1/2 (13) (m)	1/2 (13) (m)	5,000 (345)	HNHCD#	24E283
Pressure Wash	3/8 (10)	75 (23)	1/2 (13) (m)	3/8 (10) (m)	4,000 (276)	HNHFF#	24E283

BALL STOP KITS

XD HS models include ball stop kits. Order separately if ordering a bare reel or if needed with HN models.



Part Number	Description
222225	For 1/4 in (6 mm) ID hose (not compatible with XD 30, 700 or 750)
218340	For 1/4-3/8 in (6-10 mm) ID hose (not for use with XD 30, 700 or 750)
218341	0.782 in ID used for 3/8 in and 1/2 in (10 mm and 13 mm) hose (not compatible with XD 30, 700 or 750)
237872	1.0 in ID used for 5/8 in (16 mm) hose
237873	1.123 in ID used for 3/4 in (19 mm) hose
237874	1.374 in ID used for 1 in (25 mm) hose
24D132	For 3/8 in (10 mm) ID hose
24D133	For 1/2 in (13 mm) ID hose

XD SERIES HOSE REEL ACCESSORIES


30 / 30 HN




ORDERING OPTIONS

HOSE INLET KITS


A hose inlet kit is required when ordering an XD reel.

	Part Number	Description
	218549	1/2 in (13 mm) hose inlet kit for air/water and oil. 2,000 psi (137 bar), 1/2 in NPT hose inlet ID, 24 in (610 mm) long
	24E284	3/4 in (19 mm) hose inlet kit for air/water and oil. 1,250 psi (86 bar), 3/4 in NPT hose inlet ID, 24 in (610 mm) long
	24E283	1/2 in (13 mm) hose inlet kit for grease or pressure wash. 5,000 psi (345 bar), 1/2 in NPT hose inlet ID, 24 in (610 mm) long
	24E285	1/2 in (13 mm) hose inlet kit for fuel. 125 psi (8.6 bar), 1/4 in NPT hose inlet ID, 24 in (610 mm) long
	24W250	2 ft DEF inlet hose kit for XD 30 reels. 3/4 in BSPP(F) x cut end and 90° elbow
	24W251	6 ft DEF inlet hose kit for XD 30 reels. 3/4 in BSPP(F) x cut end and 90° elbow
	124875	2 ft DEF hose, 3/4 in BSPP(M) x cut end (inlet hose)
	124581	6 ft DEF hose, 3/4 in BSPP(M) x cut end (inlet hose)

VALVE HANGER KIT

	Part Number	Description
	224444	Mounts to side of reel to allow hanging of non-metered and high-flow dispensing valves

SELF-ADHESIVE IDENTIFICATION LABEL SET

	Part Number	Description
	180698	Set includes: 1 in x 5 in (25.4 mm x 127 mm) hose reels labels for Antifreeze, Water, SAE 5-40, SAE 10-40, SAE 20W, Hydraulic, Gear, SAE 10W, SAE 10-30, SAE 30W, Dexron, Air, Chassis, ATF


HOSE AND CORD REELS

XD SERIES HOSE REELS

40 / 50

BUILT-IN TOUGHNESS

Engineered to take a beating and still reliably perform in harsh environments so it's ready when you need it. Choose from more colors, thread types and hoses or choose the bare reel so you can customize it with your hose. You get a professional look, easier fit and better-performing equipment.

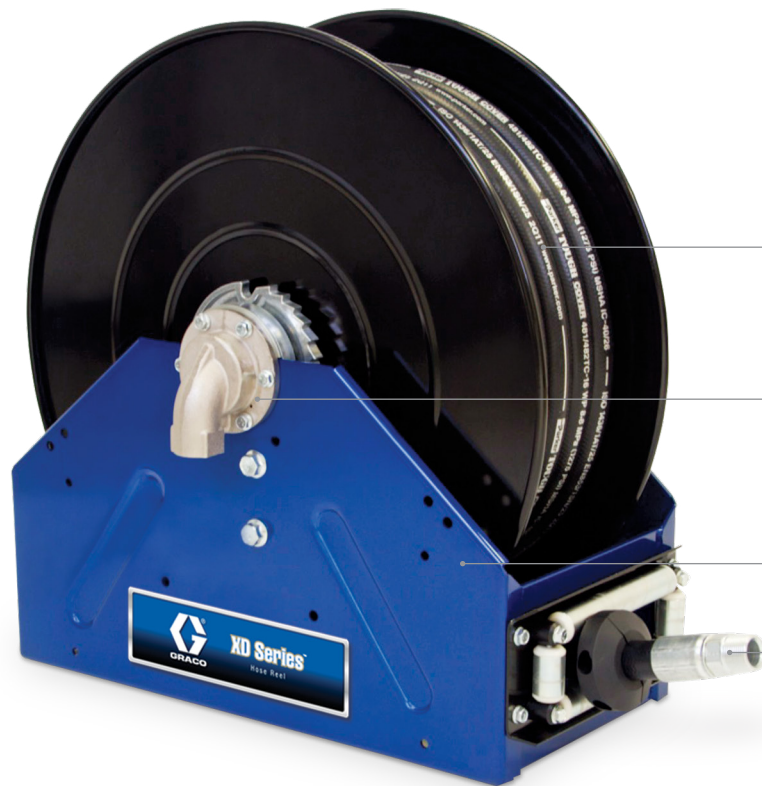

Extensive Hose Offering

Standard models come complete with factory-installed hoses on the reel. Large selection of optional reels to fit various applications.

Full-Flow Swivel

Maximize material flow with minimal pressure drop for faster fills to get more vehicles through your shop.

Rugged and Durable Body

Heavy-duty welded spool and ribbed frame for extra strength and toughness over the long haul.

Meets Worldwide Needs

- Built standard with 90° elbow with NPT, BSPP or BSPT threads.
- 1-1/2 in models also include 2 in Victaulic™-style groove.
- Accessories attach without the need for adapters.

TYPICAL APPLICATIONS

- Heavy-duty truck dealers
- Fleet maintenance
- Mining maintenance
- Public works garages
- Construction vehicle maintenance
- Heavy-duty mobile service trucks
- Agriculture
- Lube trucks

TYPICAL FLUIDS

- Petroleum- and synthetic-based oils (motor, gear and ATF)
- Diesel fuel
- Air
- Water
- Antifreeze
- Waste oil evacuation

TECHNICAL SPECIFICATIONS

Operating Temperature Range	
Oil Reels – 1 inch	-20°F to 180°F (-28°C to 82°C)
All Other Reels	-40°F to 180°F (-40°C to 82°C)
Wetted Parts	Carbon steel, nickel plated cast iron, Buna-N rubber, FKM UHMWPE
Maximum Recommended Mounting Height	15 ft (4.6 m)
Sound Pressure Level	77.6 dB(A)
Sound Power Level	86.8 dB(A)

*Victaulic is a trademark of Victaulic Company of America.



XD 40 AND XD 50 HOSE REELS


HOW TO SELECT AN XD 40/50 HOSE REEL

2 WAYS TO ORDER!

OPTION 1 – REEL WITH HOSE

(Pages 239-240)


All models include the hose, hose guide and ball stop kit.

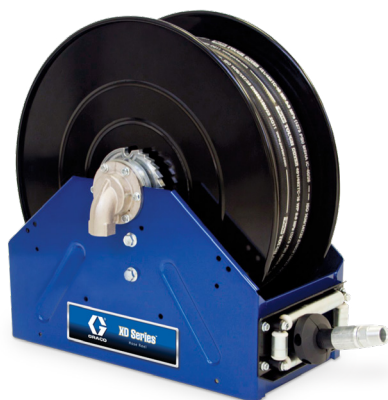

OPTION 2 – BARE REEL

(Pages 239-240)

Bare reel models do not include hose and ball stop kit.

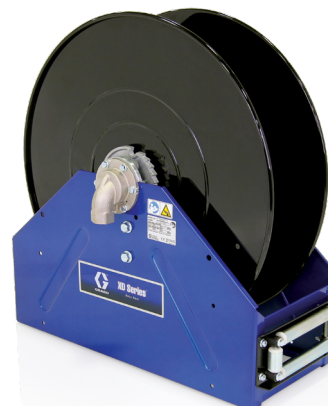

HOSE AND CORD REELS

CHOOSE YOUR ACCESSORIES (PAGES 241)



HOSE INLET KIT

A hose inlet is required for installation. They are appropriately sized for the hose reels based on type of fluid, hose size and pressure.



SUPPORT ARM

For additional support, add arm brackets to the reel. Required for overhead mounting applications.



MOUNTING KIT

Overhead mounting options available for XD 40 reels.



HOSE KIT

Large selection of hoses appropriately sized for the hose reels based on type of fluid, hose size and pressure.



HOSE INLET KIT

A hose inlet is required for installation. They are appropriately sized for the hose reels based on type of fluid, hose size and pressure.



BALL STOP KIT

When the ball stop comes in contact with the hose guide, the hose is prohibited from rewinding.



SUPPORT ARM

For additional support, add arm brackets to the reel. Required for overhead mounting applications.




MOUNTING KIT

Overhead mounting options available for XD 40 reels.

XD SERIES HOSE REELS

40 / 50

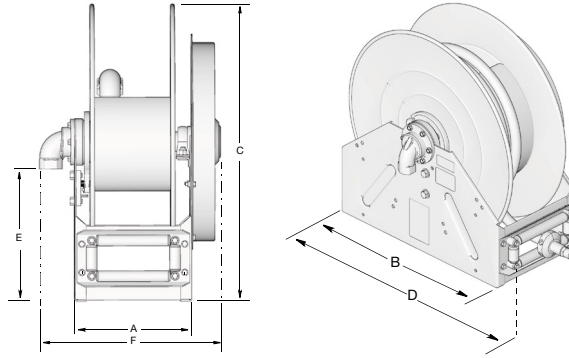


DIMENSIONS

Model	Inlet/Outlet Size NPT(F)	Dimensions in (mm)*					
		A	B	C	D	E	F
XD 4010 – Spring C/D	1 in/1 in	11.83 (300)	24 (610)	26.13 (664)	26.4 (671)	10.91 (277)	16.54 (420)
XD 4010 – Spring A/B	1 in/1 in	11.83 (300)	24 (610)	26.13 (664)	26.4 (671)	10.91 (277)	17.47 (444)
XD 5010	1 in/1 in	11.83 (300)	28.5 (724)	30.13 (765)	29.4 (747)	10.91 (277)	17.4 (444)
XD 5015	1-1/2 in/1-1/2 in	11.83 (300)	28.5 (724)	30.13 (765)	29.4 (747)	10.91 (277)	18.24 (463)


*For complete list of dimensions, see Graco product manual 3A2990.

TYPICAL MOUNTING CONFIGURATIONS

Truck-Bed or Bench Mount

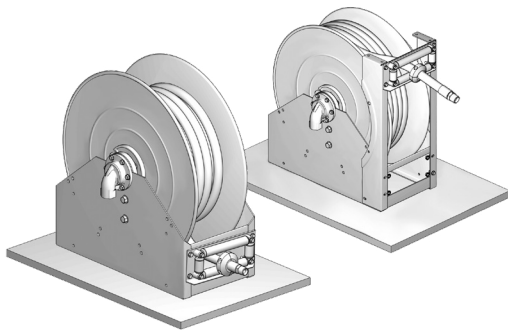


Overhead Mount (XD 40 only)

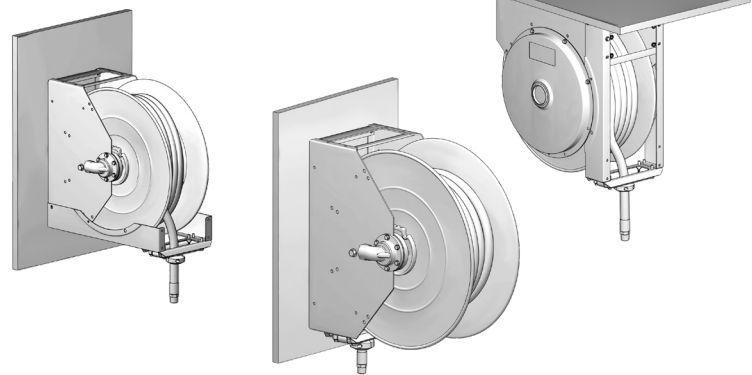

Available in
2 COLORS
Consult factory for lead times

Standard In-Stock Color:
Metallic Blue

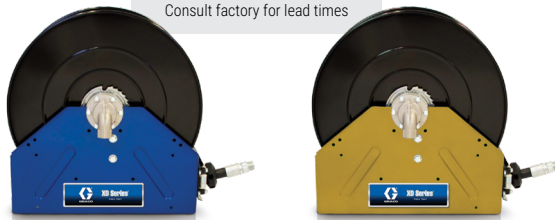





ORDERING OPTIONS

XD 40 REELS WITH HOSE

Includes hose, ball stop kit and hose guide. **Required hose inlet kit sold separately.**

Reel Size	Fluid	Hose		Connection Size		Maximum Pressure psi (bar)	Spring	Truck/Bench Mount Only	Part Number by Reel Color		Hose Inlet Kit (Order Separately)	
		ID in (mm)	Length ft (m)	Inlet NPT(F)	Outlet NPT(M)				Metallic Blue	Yellow		
	Air/Water	1/2 (13)	100 (30)	1	1/2	300 (21)	D		24P327	24P328	24R111	
		3/4 (19)	75 (23)	1	3/4	300 (21)	D		24P330	24P331		
		1 (25)	50 (15)	1	1	300 (21)	D		24P336	24P337		
	Oil	1/2 (13)	100 (30)	1	1/2	2,000 (138)	A		24P339	24P340		
		3/4 (19)	75 (23)	1	3/4	1,500 (103)	C	•	24P342	24P343		
		3/4 (19)	75 (23)	1	3/4	1,500 (103)	B		24R857	24R859		
		3/4 (19)	100 (30)	1	3/4	1,500 (103)	A		24P345	24P346		
	Waste Oil Evacuation	1 (25)	50 (15)	1	1	1,275 (88)	C	•	24P348	24P349		
		1 (25)	50 (15)	1	1	250 (17)	C		24P351	24P352		24R112
		1 (25)	50 (15)	1	1	250 (17)	C		24P354	24P355		24R115

XD 40 BARE REELS

Reel Size	Fluid	Hose Length Capacity (in x ft (m))			Connection Size		Maximum Pressure psi (bar)	Spring	Truck/Bench Mount Only	Part Number by Reel Color		Hose Inlet Kit (order separately)	
		1/2	3/4	1	Inlet NPT(F)	Outlet NPT(F)				Metallic Blue	Yellow		
	Air/Water	-	100 (30)	-	1	1	600 (41)	C		24P317	24P318	24R111	
	Oil	-	75 (23)	50 (15)	1	1	2,000 (138)	C	•	24P320	24P322		
		-	75 (23)	50 (15)	1	1	2,000 (138)	B		24R854	24R855		
	Waste Oil Evacuation	-	-	75 (23)	1	1	600 (41)	C		24P317	24P318		24R112
	Diesel Fuel	-	-	50 (15)	1	1	600 (41)	C		24P317	24P318		24R115

REMEMBER TO ORDER!

			
Ball Stop Kit See page 241	Support Arm See page 241	Hose See page 249-250	Hose Inlet See page 241


XD SERIES HOSE REELS

40 / 50

ORDERING OPTIONS

XD 50 REELS WITH HOSE


Includes hose, ball stop kit and hose guide. **Required hose inlet kit sold separately.**



Reel Size	Fluid	Hose		Connection Size		Maximum Pressure psi (bar)	Part Number by Reel Color		Hose Inlet Kit (order separately)
		ID in (mm)	Length ft (m)	Inlet NPT(F)	Outlet NPT(M)		Metallic Blue	Yellow	
XD 5010	Air/Water	1 (25)	100 (30)	1	1	300 (21)	24P473	24P474	24R111
	Oil	1 (25)	75 (23)	1	1	1,275 (88)	24P476	24P477	
	Diesel Fuel	1 (25)	100 (30)	1	1	250 (17)	24P488	24P489	24R115
XD 5015**	Waste Oil Evacuation	1-1/4 (32)	50 (15)	1-1/2	1-1/4	200 (14)	24P482	24P483	-
	Diesel Fuel	1-1/2 (38)	50 (15)	1-1/2	1-1/2	150 (10)	24P497	24P498	24R117

**Standard 2 inch Vitalic"-style groove on inlet.

XD 50 BARE REELS



Reel Size	Fluid	Hose Length Capacity (in x ft (m))			Connection Size		Maximum Pressure psi (bar)	Part Number by Reel Color		Hose Inlet Kit (order separately)
		1	1-1/4	1-1/2	Inlet NPT(F)	Outlet NPT(F)		Metallic Blue	Yellow	
XD 5010	Air/Water	100 (30)	-	-	1	1	600 (41)	24P455	24P456	24R111
	Oil	75 (23)	-	-	1	1	2,000 (138)	24P458	24P459	
	Diesel Fuel	100 (30)	-	-	1	1	600 (41)	24P455	24P456	24R115
XD 5015**	Diesel Fuel	-	50 (15)	-	1-1/2	1-1/2	600 (41)	24P461	24P462	24R117
		-	50 (15)	50 (15)	1-1/2	1-1/2	600 (41)	24P467	24P468	

**Standard 2 inch Vitalic"-style groove on inlet.

REMEMBER TO ORDER!

 <p>Ball Stop Kit See page 241</p>	 <p>Support Arm See page 241</p>	 <p>Hose See page 249-250</p>	 <p>Hose Inlet See page 241</p>
--	--	---	--

Vitalic is a trademark of Vitalic Company of America.


XD SERIES HOSE REEL ACCESSORIES




40 / 50

ORDERING OPTIONS


BALL STOP KITS

	Part Number	Description
	237873	Ball stop kit used for 3/4 in (19 mm) hose
	237874	Ball stop kit used for 1 in (25 mm) hose
	24R060	Ball stop kit used for a 1-1/4 in (32 mm) hose
	24R061	Ball stop kit used for a 1-1/2 in (38 mm) hose


HOSE GUIDES

	Part Number	Description
	24R072	Roller guide kit with bracket for XD 40 and XD 60
	24R074	Roller guide kit with bracket for XD 50


SUPPORT ARM KITS

	Part Number	Description
	24R076	Support arm kit for XD 40
	24R077	Support arm kit for XD 50


MOUNTING KIT

	Part Number	Description
	237932	Overhead or wall mounting kit for XD 40. Includes all parts needed for overhead mounting one reel.

HOSE INLET KITS

	Part Number	Description
	24R111	1 in (25 mm) hose inlet kit for air/water and oil. 1,275 psi (88 bar), 1 in NPT hose inlet ID, 28 in (710 mm) long
	24R112	1 in (25 mm) hose inlet kit for waste oil evacuation. 250 psi (17 bar), 1 in NPT hose inlet ID, 28 in (710 mm) long
	24R115	1 in (25 mm) hose inlet kit for diesel fuel. 250 psi (17 bar), 1 in NPT hose inlet ID, 28 in (710 mm) long
	24R117	1-1/2 in (38 mm) hose inlet kit for diesel fuel. 150 psi (10 bar), 1.5 in NPT hose inlet ID, 28 in (710 mm) long

SELF-ADHESIVE IDENTIFICATION LABEL SET

	Part Number	Description
	180698	Set includes: 1 in x 5 in (25.4 mm x 127 mm) hose reels labels for Antifreeze, Water, SAE 5-40, SAE 10-40, SAE 20W, Hydraulic, Gear, SAE 10W, SAE 10-30, SAE 30W, Dexron, Air, Chassis, ATF

HOSE AND CORD REELS

XD SERIES POWERED BARE HOSE REELS

60 / 70 / 80

SAFE, VERSATILE POWERED HOSE REELS

We like to think of the XD motor rewind reels as super-powered. The innovative design is packed with features to help you work safer, smarter and faster. We demand extensive product testing, often exceeding industry standards to ensure you get the best product on the market.

Heavy-duty Welded Spool

Built to handle the weight of heavy hoses. Designed to surround and protect the drive unit from the elements to promote longer-lasting, safer operation.

Easy System Integration


Easily change the inlet and motor direction to give you the option of a right- or left-hand flow orientation.

Safe, Reliable Direct Drive and Gear Motors

Drive unit is clean and lubricated for life. No need to worry about greasy, exposed drive chains that need maintenance and can be dangerous to operators.

Rugged and Durable Body

- Heavy-duty one piece welded frame is engineered to flex under extreme operating conditions and is stronger than bolted frames that can loosen with use.
- Individually painted and powder-coated components have superior corrosion resistance over assembled and painted products.

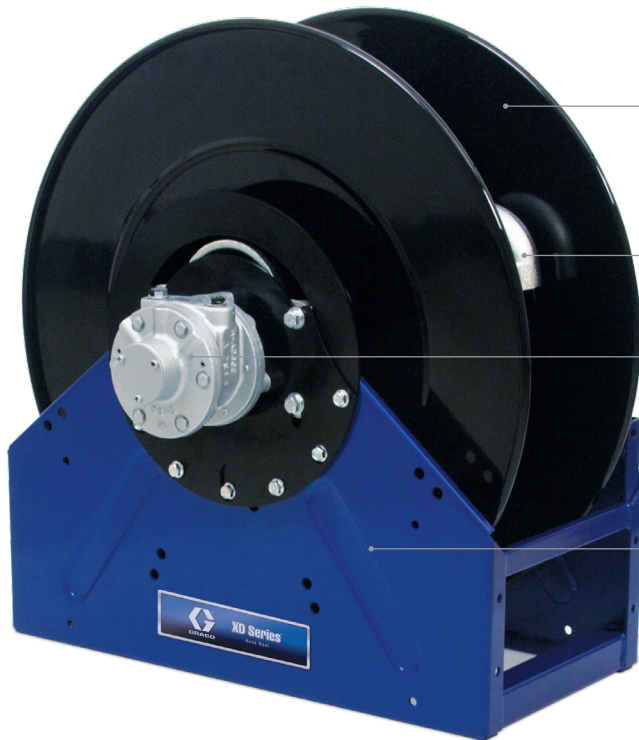

HOSE AND CORD REELS

TYPICAL APPLICATIONS

- Heavy-duty truck dealers
- Fleet maintenance
- Mining maintenance
- Public works garages
- Construction vehicle maintenance
- Heavy-duty mobile service trucks
- Agriculture
- Lube trucks

TYPICAL FLUIDS


- Petroleum- and synthetic-based oils (motor, gear and ATF)
- Diesel fuel
- Air
- Water
- Grease
- Waste oil evacuation

TECHNICAL SPECIFICATIONS

Operating Temperature Range	
Motorless Reels	-40°F to 180°F (-40°C to 82°C)
Air/Water Applications	-40°F to 180°F (-40°C to 82°C)
Waste Oil Evacuation Applications	-40°F to 180°F (-40°C to 82°C)
Oil Applications	-40°F to 180°F (-40°C to 82°C)
Grease Applications	0°F to 180°F (-18°C to 82°C)
Diesel Fuel Applications	-40°F to 140°F (-40°C to 60°C)
Wetted Parts	Nickel plated cast iron, cast iron, Buna-N rubber, polyethylene
Electric and Hydraulic Motors Sound Pressure Level	<80 dB(A)
Pneumatic Motors Sound Pressure Level	84.6 dB(A)
Pneumatic Motors Sound Power Level	89.9 dB(A)
Instruction Manual	332630

XD SERIES BARE HOSE REELS

60 / 70 / 80

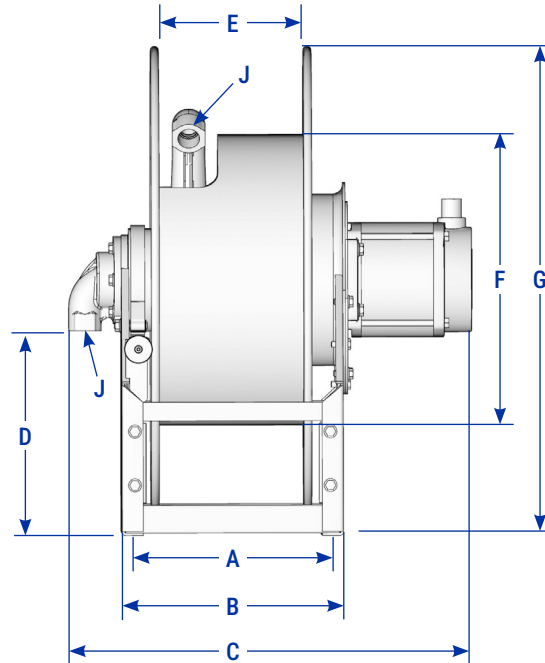


DIMENSIONS

Reference dimension "D" for specific motor type


Model	Inlet/Outlet Size (J) NPT(F)	Dimensions in (mm)								
		A (Mounting Holes)	B	C			D	E	F	G
				Pneumatic	Hydraulic	Electric				
XD 6010	1 in/1 in	10.45 (256)	11.8 (300)	20.4 (519)	15.7 (400)	21.6 (547)	10.9 (277)	7.8 (198)	15.5 (394)	26.1 (663)
XD 7010	1 in/1 in	12.95 (329)	14.3 (363)	22.9 (583)	18.2 (463)	24.1 (611)	10.9 (277)	10 (254)	10 (254)	26.1 (663)
XD 7015	1-1/2 in/ 1-1/2 in	12.95 (329)	14.3 (363)	23.7 (603)	19 (483)	24.8 (631)	10.9 (277)	10 (254)	10 (254)	26.1 (663)
XD 7020	2 in/2 in	12.95 (329)	14.3 (363)	24.1 (613)	19.4 (493)	25.2 (641)	10.2 (259)	10 (254)	10 (254)	26.1 (663)
XD 8010	1 in/1 in	20.68 (525)	22.1 (561)	30.7 (779)	26 (659)	31.8 (807)	13.4 (340)	18 (457)	15.5 (394)	30.1 (765)
XD 8015	1-1/2 in/ 1-1/2 in	20.68 (525)	22.1 (561)	31.4 (799)	26.7 (679)	32.5 (827)	13.4 (340)	18 (457)	15.5 (394)	30.1 (765)
XD 8020	2 in/2 in	20.68 (525)	22.1 (561)	31.9 (809)	27.1 (689)	33 (837)	12.7 (323)	18 (457)	15.5 (394)	30.1 (765)

TYPICAL MOUNTING CONFIGURATIONS

Bench/Trunk Mount

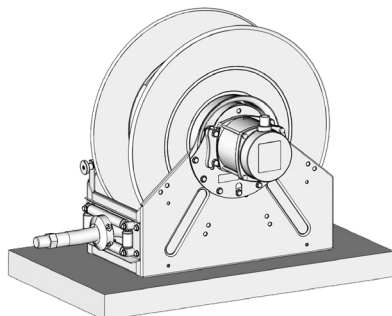

Truck Mount with Remote Mounted Roller Guide



HOSE AND CORD REELS

GRACO XD SERIES POWERED HOSE REELS

HOW TO SELECT AN XD POWERED BARE HOSE REEL

A COMPLETE FAMILY OF MOTOR REWIND HOSE REELS

The innovative design of the XD reel family is packed with features to help you work safer, smarter and faster. Direct-drive motor options include hydraulic, pneumatic and electric for air, water, oil, grease, fuel dispense and waste oil evacuation applications.

Use this selection chart to configure the XD reel to suit your needs.



A SPECIFY THE HOSE FLUID TYPE AND CAPACITY

Determine your fluid type and capacity before selecting your reel.

Fluid Type	Hose ID in (mm)	Hose Length ft (m)
<input type="checkbox"/> Air/Water	<input type="checkbox"/> 1/2 (13)	<input type="checkbox"/> 50 (15)
<input type="checkbox"/> Antifreeze	<input type="checkbox"/> 1 (25)	<input type="checkbox"/> 75 (23)
<input type="checkbox"/> Petroleum- and Synthetic-Based Oils	<input type="checkbox"/> 1-1/2 (38)	<input type="checkbox"/> 100 (30)
<input type="checkbox"/> Waste Oil	<input type="checkbox"/> 2 (51)	<input type="checkbox"/> 150 (46)
<input type="checkbox"/> Diesel Fuel		

REQUIRED

A

C SELECT YOUR DRIVE TYPE AND FRAME

Motors must be purchased separately.

- Order Reel and Motor Separately (Page 246)
 - Pneumatic Motor
 - Hydraulic Motor
 - Electric Motor
 - 12 VDC, 1/2 HP
 - 12 VDC, 2/3 HP
 - 24 VDC, 1/2 HP
 - 24 VDC, 2/3 HP
 - 115 VAC, 0.40 HP

REQUIRED

C

B CHOOSE YOUR REEL SIZE

- XD 60
- XD 70
- XD 80

REQUIRED

B

D CHOOSE YOUR CONTROLS (Pages 246-247)

- Pneumatic Motor**
 - Pneumatic 2-position, 3-way valve
- Hydraulic Motor**
 - 12 VDC electric control of hydraulic motor, 3-position, 4-way valve
 - 12 VDC electric control of hydraulic motor with switch, 3-position, 4-way valve
 - 24 VDC electric control of hydraulic motor, 3-position, 4-way valve
 - 24 VDC electric control of hydraulic motor with switch, 3-position, 4-way valve
- Electric Motor**
 - Hazardous location on/off button
 - 12 VDC intermittent-duty solenoid
 - 24 VDC intermittent-duty solenoid
 - Manual reset button circuit breaker (25 or 50 amp)

REQUIRED

D

E HOSE INLET KIT (Page 248)

(Page 248)


A hose inlet is required for installation. They are appropriately sized for the hose reels based on type of fluid, hose size and pressure.

Note: All 1-1/2 in (38 mm) hose reels include a 2 in (51 mm) Victaulic-style groove on inlet. If you are using these reels, it is recommended to order an inlet kit from Graco.

- Yes (required for installation)
- No (will supply my own hose inlet kit)

REQUIRED FOR INSTALLATION

E

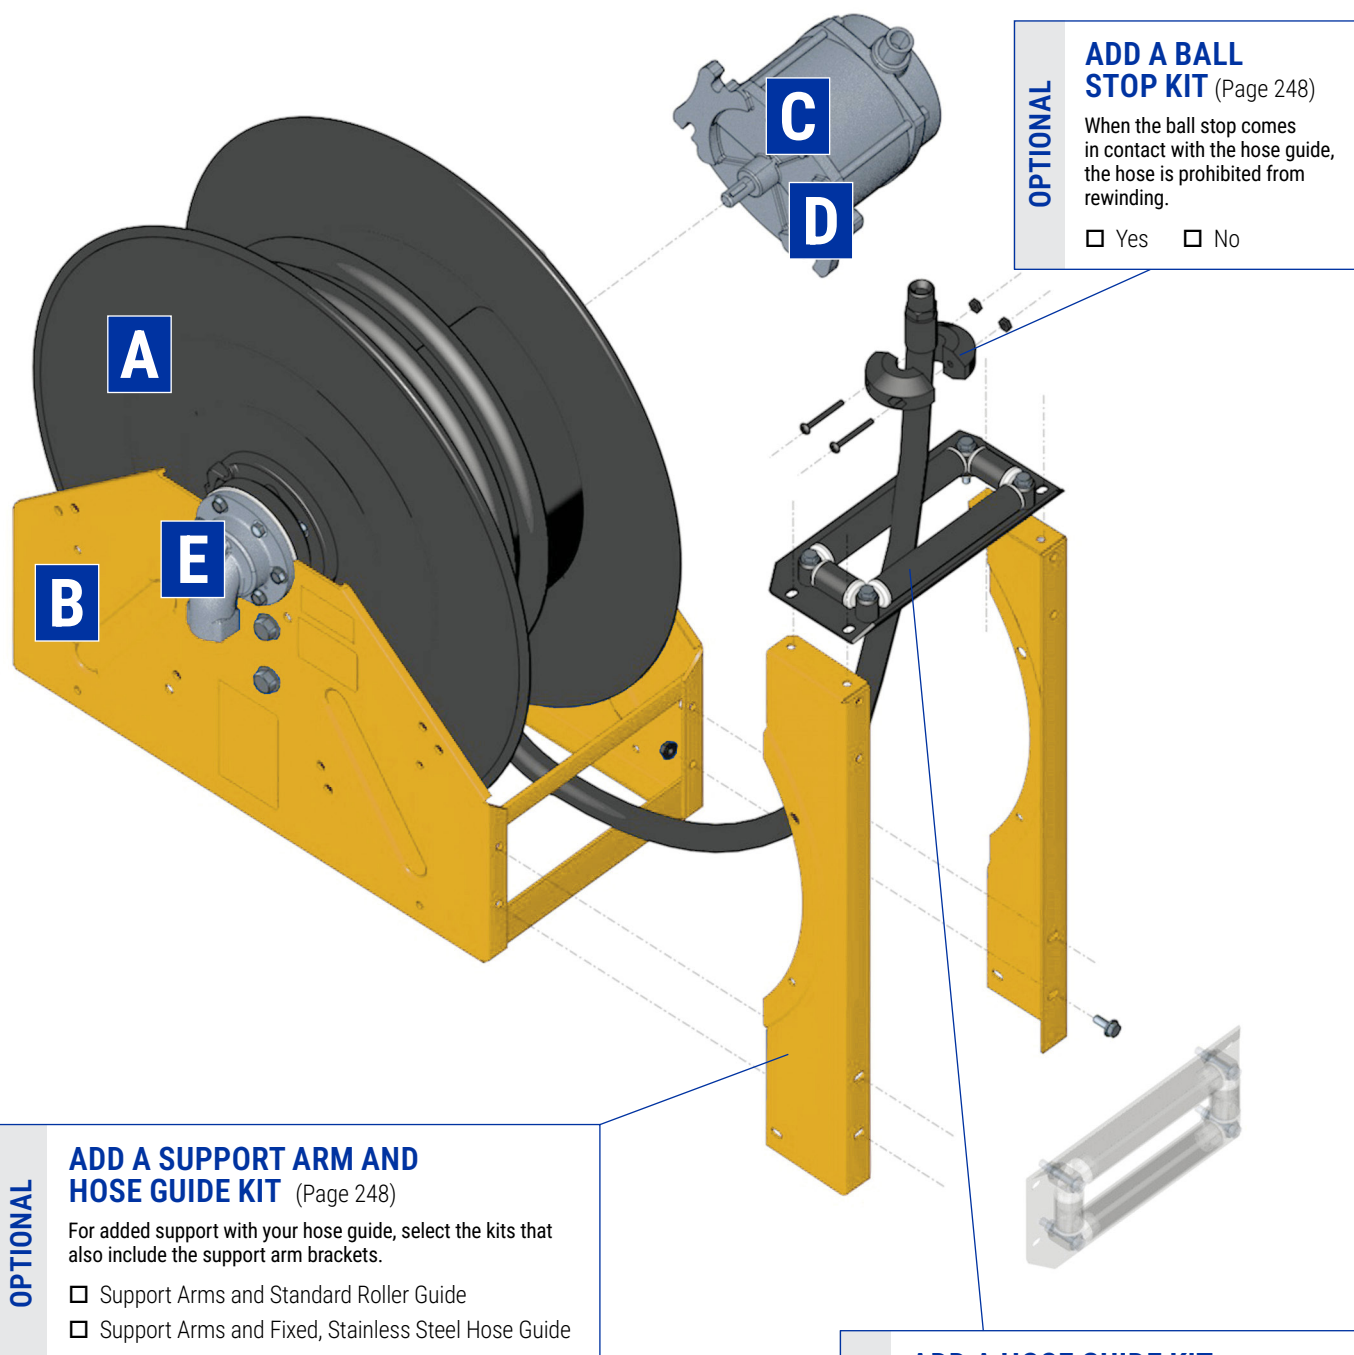

OPTIONAL

ADD A BALL STOP KIT (Page 248)

When the ball stop comes in contact with the hose guide, the hose is prohibited from rewinding.

Yes No

OPTIONAL

ADD A SUPPORT ARM AND HOSE GUIDE KIT (Page 248)

For added support with your hose guide, select the kits that also include the support arm brackets.

Support Arms and Standard Roller Guide

Support Arms and Fixed, Stainless Steel Hose Guide

OPTIONAL

ADD A HOSE GUIDE KIT (Page 248)

Select between a fixed, stainless steel hose guide or a general roller guide.

Hose guide mounts directly to the reel frame or in three different positions on the support arm.

Standard Roller Guide

Fixed, Stainless Steel Hose Guide

XD SERIES BARE HOSE REELS


60 / 70 / 80

ORDERING OPTIONS

REEL FRAMES ONLY




XD 60 / XD 70 / XD 80 REELS

Motor is not included and must be purchased separately.



Reel Size	Fluid	Hose Capacity of Reel ft (m)					Maximum Pressure psi (bar)	Weight lb (kg)	Inlet/Outlet Size NPT(F)	Part Number
		Hose ID in (mm)								
		1/2 (13)	3/4 (19)	1 (25)	1-1/2 (38)	2 (51)				
XD 6010	Air/Water/Diesel Fuel	100 (30)	100 (30)	50 (15)	-	-	600 (41)	87 (39)	1 in/1 in (25 mm/25 mm)	24T105
	Oil	100 (30)	100 (30)	50 (15)	-	-	3,000 (207)	88 (40)		24T108
	Waste Oil Evacuation	-	-	50 (15)	-	-	600 (41)	87 (39)		24T105
	Grease	-	-	50 (15)	-	-	3,000 (207)	88 (40)		24T108
XD 7010	Air/Water/Diesel Fuel	-	-	100 (30)	-	-	600 (41)	86 (39)		24T111
	Oil	-	-	100 (30)	-	-	3,000 (207)	87 (39)		24T114
XD 8010	Air/Water/Diesel Fuel	-	-	150 (46)	-	-	600 (41)	127 (58)		24T123
	Oil	-	-	150 (46)	-	-	3,000 (207)	129 (58)		24T126
XD 7015	Waste Oil Evacuation	-	-	-	50 (15)	-	600 (41)	87 (39)	1-1/2 in/ 1-1/2 in (38 mm/38 mm)	24T117
		-	-	-	65 (20)	-	600 (41)	87 (39)		24T117
XD 8015	Diesel Fuel	-	-	-	100 (30)	-	600 (41)	129 (58)		24T129
XD 7020		-	-	-	-	33 (10)	600 (41)	91 (41)		24T120
XD 8020		-	-	-	-	50 (15)	600 (41)	133 (60)	24T132	

MOTOR ASSEMBLIES – PAIR WITH FRAME-ONLY MODELS

Image	Part Number	Description
	24T892	Pneumatic motor assembly, reversible type. For installing motor to bare XD reel.
	24T891	Hydraulic motor assembly, reversible type. For installing motor to bare XD reel.
	24T886	12 VDC, 1/2 HP motor assembly, reversible type. For installing motor to bare XD frame.
	24T910	12 VDC, 2/3 HP motor assembly, reversible type. For installing motor to bare XD frame.
	24T888	24 VDC, 1/2 HP motor assembly, reversible type. For installing motor to bare XD frame.
	24T911	24 VDC, 2/3 HP motor assembly, reversible type. For installing motor to bare XD frame.
	24T889	115 VAC, 0.40 HP motor assembly, reversible type. For installing motor to bare XD frame.

REMEMBER TO ORDER!

				
Ball Stop Kit See page 248	Hose Guide See page 248	Support Arm See page 248	Hose See page 249-250	Hose Inlet See page 248

XD SERIES BARE HOSE REEL ACCESSORIES



ORDERING OPTIONS


MOTOR CONTROLS (REQUIRED)

	Part Number	Description
	127271	Pneumatic valve to control XD 60/70/80 pneumatic powered hose reels. 2-position, 3-way valve.
	24T875	Hydraulic control module for electric over hydraulic control of XD 60/70/80 hydraulic powered hose reels, 12 VDC. 3-position, 4-way valve.
	24T876	Hydraulic control module for electric over hydraulic control of XD 60/70/80 hydraulic powered hose reels, 24 VDC. 3-position, 4-way valve.
	127224	Hydraulic control module for electric over hydraulic control of XD 60/70/80 hydraulic powered hose reels, 12V, includes switch. 3-position, 4-way valve.
	127225	Hydraulic control module for electric over hydraulic control of XD 60/70/80 hydraulic powered hose reels, 24V, includes switch. 3-position, 4-way valve.
	127214	Momentary push-button on/off switch with red rubber cap. Use for 12 or 24 VDC.
	127217	Hazardous-location push-button on/off switch. Use for 12 and 24 VDC.
	127223	Hazardous-location push-button on/off switch. Use for 115 and 220 VAC.
	127218	Hazardous-location junction box
	127219	12 VDC intermittent-duty solenoid recommended for activating rewind on 12 VDC motor
	127220	24 VDC intermittent-duty solenoid recommended for activating rewind on 24 VDC motor
	127221	Manual-reset push-button circuit breaker, 50 amp rating
	127222	Manual-reset push-button circuit breaker, 25 amp rating



XD SERIES BARE HOSE REEL ACCESSORIES

ORDERING OPTIONS



BALL STOP KITS

	Part Number	Description
	237873	Ball stop kit used for 3/4 in (19 mm) hose
	237874	Ball stop kit used for 1 in (25 mm) hose
	24R060	Ball stop kit used for 1.25 in (32 mm) hose
	24R061	Ball stop kit used for 1.5 in (38 mm) hose


HOSE GUIDE

	Part Number	Description
	24T327	Stainless steel hose guide for XD 60
	24T328	Stainless steel hose guide for XD 70
	24T329	Stainless steel hose guide for XD 80
	24R072	Roller guide kit with bracket for XD 40 and XD 60
	24T330	Roller guide kit with bracket for XD 70
	24T331	Roller guide kit with bracket for XD 80


SUPPORT ARM KIT WITH HOSE GUIDE

	Part Number	Description
	24T332	Arm kit with stainless steel hose guide for XD 60 (24T327)
	24T333	Arm kit with stainless steel hose guide for XD 70 (24T328)
	24T334	Arm kit with stainless steel hose guide for XD 80 (24T329)
	24T335	Arm kit with roller guide for XD 60 (24R072)
	24T336	Arm kit with roller guide for XD 70 (24T330)
	24T337	Arm kit with roller guide for XD 80 (24T331)

HOSE INLET KITS

	Part Number	Description
	24R111	1 in (25 mm) hose inlet kit for air/water and oil 1,275 psi (88 bar), 1 in NPT hose inlet ID, 28 in (710 mm) long
	24R112	1 in (25 mm) hose inlet kit for waste oil evacuation 250 psi (17 bar), 1 in NPT hose inlet ID, 28 in (710 mm) long
	24R115	1 in (25 mm) hose inlet kit for diesel fuel 250 psi (17 bar), 1 in NPT hose inlet ID, 28 in (710 mm) long
	24R117	1-1/2 in (38 mm) hose inlet kit for diesel fuel 150 psi (10 bar), 1-1/2 in NPT hose inlet ID, 28 in (710 mm) long
	24R118	2 in (51 mm) hose inlet kit for diesel fuel 150 psi (10 bar), 2 in NPT hose inlet ID, 28 in (710 mm) long
	24T858	1-1/2 in (38 mm) hose inlet kit for waste oil evacuation 150 psi (10 bar), 1-1/2 in NPT hose inlet ID, 28 in (710 mm) long

SELF-ADHESIVE IDENTIFICATION LABEL SET


	Part Number	Description
	180698	Set includes: 1 in x 5 in (25.4 mm x 127 mm) hose reels labels for Antifreeze, Water, SAE 5-40, SAE 10-40, SAE 20W, Hydraulic, Gear, SAE 10W, SAE 10-30, SAE 30W, Dexron, Air, Chassis, ATF



HOSE REEL ACCESSORIES


ORDERING OPTIONS

AIR/WATER/ANTIFREEZE HOSES




Part Number	Description	Compatible Reel Series
16A684	1/2 in x 75 ft (13 mm x 23 m) hose for air/water, 300 psi (20.6 bar)	XD 30
126359	1/2 in x 100 ft (13 mm x 30 m) hose for air/water, 300 psi (20.6 bar)	XD 40, XD 60
16A707	3/4 in x 50 ft (19 mm x 15 m) hose for air/water, 300 psi (20.6 bar)	XD 30
126360	3/4 in x 75 ft (19 mm x 23 m) hose for air/water, 300 psi (20.6 bar)	XD 40
126361	3/4 in x 100 ft (19 mm x 30 m) hose for air/water, 300 psi (20.6 bar)	XD 40, XD 60
126362	1 in x 50 ft (25 mm x 15 m) hose for air/water, 300 psi (20.6 bar)	XD 40, XD 60
126363	1 in x 75 ft (25 mm x 23 m) hose for air/water, 300 psi (20.6 bar)	XD 50
126364	1 in x 100 ft (25 mm x 30 m) hose for air/water, 300 psi (20.6 bar)	XD 50, XD 70

OIL HOSES




Part Number	Description	Compatible Reel Series
26C121	1/2 in x 35 ft (13 mm x 11 m) hose for oil, 2,000 psi (138 bar)	SDX 10, XDX 10
26C122	1/2 in x 50 ft (13 mm x 15 m) hose for oil, 2,000 psi (138 bar)	SDX 20, XDX 20
26C123	1/2 in x 75 ft (13 mm x 23 m) hose for oil, 2,000 psi (138 bar)	XD 30
26C124	1/2 in x 100 ft (13 mm x 30 m) hose for oil, 2,000 psi (138 bar)	XD 40, XD 60
126376	3/4 in x 75 ft (19 mm x 23 m) hose for oil, 1,500 psi (103 bar)	XD 40, XD 60
126377	3/4 in x 100 ft (19 mm x 30 m) hose for oil, 1,500 psi (103 bar)	XD 40, XD 60
126503	1 in x 50 ft (25 mm x 15 m) hose for oil, 3,000 psi (207 bar)	XD 40, XD 60
126504	1 in x 75 ft (25 mm x 23 m) hose for oil, 3,000 psi (207 bar)	XD 50
126505	1 in x 100 ft (25 mm x 30 m) hose for oil, 3,000 psi (207 bar)	XD 70, XD 80

GREASE HOSES



Part Number	Description	Compatible Reel Series
109158	1/4 in x 50 ft (6 mm x 15m) hose for grease, 5,000 psi (345 bar)	SDX 10, XDX 10
124470	3/8 in x 35 ft (10 mm x 11 m) hose for grease, 4,800 psi (331 bar)	SDX 10, XDX 10
124461	3/8 in x 50 ft (10 mm x 15 m) hose for grease, 4,800 psi (331 bar)	SDX 20, XDX 20
126076	3/8 in x 75 ft (10 mm x 23m) hose for grease, 5,000 psi (345 bar)	XD 30
16A674	1/2 in x 50 ft (13 mm x 15 m) hose for grease, 5,000 psi (345 bar)	XD 30

WASTE OIL EVACUATION HOSES




Part Number	Description	Compatible Reel Series
16A686	1 in x 30 ft (25 mm x 9 m) hose for waste oil or fuel, 125 psi (9 bar)	XD 30
126379	1 in x 50 ft (25 mm x 15 m) hose for waste oil, 250 psi (17 bar)	XD 40, XD 60
126380	1 1/4 in x 35 ft (32 mm x 10.5 m) hose for waste oil, 200 psi (13.8 bar)	XD 50
126688	1 1/4 in x 50 ft (32 mm x 15 m) hose for waste oil, 200 psi (13.8 bar)	XD 50
127173	1 1/2 in x 50 ft (38 mm x 15 m) hose for waste oil, 200 psi (13.8 bar)	XD 50

HOSE REEL ACCESSORIES


ORDERING OPTIONS

DIESEL FUEL HOSES




Part Number	Description	Compatible Reel Series
16A686	1 in x 30 ft (25 mm x 9 m) hose for waste oil or fuel, 125 psi (9 bar)	XD 30
24R102	1 in x 50 ft (25 mm x 15 m) hose for diesel fuel, 250 psi (17 bar)	XD 40, XD 60
24R103	1 in x 75 ft (25 mm x 23 m) hose for diesel fuel, 250 psi (17 bar)	XD 50
24R106	1 in x 100 ft (25 mm x 30 m) hose for diesel fuel, 250 psi (17 bar)	XD 50, XD 70
24T252	1 in x 150 ft (25 mm x 46 m) hose for diesel fuel, 250 psi (17 bar)	XD 80
24R108	1 1/4 in x 35 ft (32 mm x 10.5 m) hose for diesel fuel, 250 psi (17 bar)	XD 50
24R110	1 1/4 in x 50 ft (32 mm x 15 m) hose for diesel fuel, 250 psi (17 bar)	XD 50
24R114	1 1/2 in x 50 ft (38 mm x 15 m) hose for diesel fuel, 150 psi (11 bar)	XD 50
24T253	1 1/2 in x 100 ft (38 mm x 30 m) hose for diesel fuel, 150 psi (11 bar)	XD 80
127167	2 in x 33 ft (51 mm x 10 m) hose for diesel fuel, 150 psi (11 bar)	XD 80
24T254	2 in x 50 ft (51 mm x 15 m) hose for diesel fuel, 150 psi (11 bar)	XD 80

DIESEL EXHAUST FLUID (DEF) HOSES



Part Number	Description	Compatible Reel Series
125242	3/4 in x 50 ft (19 mm x 15 m) hose for DEF fluid, 50 psi (3 bar)	XD 30

PRESSURE WASH HOSES



Part Number	Description	Compatible Reel Series
16A688	3/8 in x 75 ft (10 mm x 23m) hose for pressure wash, 4,000 psi (276 bar)	XD 30

FLUID RECLAIM EQUIPMENT



	Page
Oil King™	252
Coolant King™	253
Oil Ace™	254-256
16-Gallon Mobile Receiver	257
Big Hauler™ Truck Drain	258
Diaphragm Evacuation Pumps	259
Evacuation Pump Packages	260-262
Fluid Reclaim Accessories	263-265

CONVENIENT USED-OIL RECEIVER

Oil King is designed with the busy shop in mind. With oversized tires and push-pull handles it allows for smooth maneuvering. The large funnel can collect fluids from both a drain plug and a filter port at the same time.

Large Offset Collection Pan

This funnel can be raised to a maximum height of 72 in (183 cm) and is equipped with a filter screen to prevent debris from entering the tank.

Filter Drain Tray

Used filters are able to drain separately from the collection pan.

Convenient Tool Tray

Built-in holding bins for new or used filters, wrenches and rags all at your fingertips.

Large 25-Gallon (94.6 l) Capacity Receiver

- Made from a heavy-duty, durable UV stabilized polymer.
- Dent-, rust- and corrosion-resistant.

Liquid Sight Gauge

A full-length liquid level sight gauge lets you know when the tank is full.

Two Evacuation Port Options

Choose from the gravity drain valve at the bottom or suction evacuation at the top.

Oversized Tires

Easily maneuver over hose and rough floors.



TYPICAL APPLICATIONS

- Automotive dealerships
- Fast lube centers
- Service shops
- Heavy-duty dealerships
- Fleet services facilities

TYPICAL FLUIDS

- Used oil

TECHNICAL SPECIFICATIONS

Fluid	Used Oil
Fluid Capacity	25 gal (95 l)
Evacuation	Bottom – Gravity / Top – Suction
Receiver Material	Polyethylene
Length	24 in (60 cm)
Width	24 in (60 cm)
Height	45 to 72 in (1.1 to 1.8 m)
Funnel Size	22 x 24 in (50 x 56 cm)
Dry Weight	54 lb
Instruction Manual	308667

ORDERING OPTIONS

Part Number	Description
238866	25 gal (95 l) used-oil receiver with used-filter tray, tool holders and sight gauge. Must use wall mount package (224873) for topside evacuation.

Must ship via truck.



COOLANT KING™

DURABLE RECEIVER

Coolant King is designed with the busy shop in mind. With oversized tires and push-pull handles it allows for smooth maneuvering. The full-length sight gauge lets you know when the tank is full.



Convenient Tool Tray

Built-in holding bins for shop tools at your fingertips.

Liquid Sight Gauge

A full-length liquid level sight gauge lets you know when the tank is full.

Oversized Tires

Easily maneuver over hose and rough floors.

Large Offset Collection Pan

This funnel can be raised to a maximum height of 72 in (183 cm) and is equipped with a filter screen to prevent debris from entering the tank.

Large 25-Gallon (94.6 l) Capacity Receiver

- Made from a heavy-duty, durable UV stabilized polymer.
- Dent-, rust- and corrosion-resistant.
- Color-specific for easy identification.

Two Evacuation Port Options

Choose from the gravity drain valve at the bottom or suction evacuation at the top.

FLUID RECLAIM EQUIPMENT

TYPICAL APPLICATIONS

- Automotive dealerships
- Fast lube centers
- Service shops
- Heavy-duty dealerships
- Fleet services facilities

TYPICAL FLUIDS

- Used oil

TECHNICAL SPECIFICATIONS

Fluid	Antifreeze
Fluid Capacity	25 gal (95 l)
Evacuation	Bottom – Gravity / Top – Suction
Receiver Material	Polyethylene
Length	24 in (60 cm)
Width	24 in (60 cm)
Height	45 to 72 in (1.1 to 1.8 m)
Funnel Size	22 x 24 in (50 x 56 cm)
Dry Weight	54 lb
Instruction Manual	308667

ORDERING OPTIONS

Part Number	Description
248632	25 gal (95 l) used-antifreeze receiver with used-filter tray, tool holders and sight gauge. Must use wall mount package (224873) for topside evacuation.

Must ship via truck.

OIL ACE™ DRAIN

PRESSURIZED OIL DRAIN

Drain, evacuate and transfer used oil reliably, quickly and in the most cost-effective manner.

Large Offset Collection Pan

23 inch (58 cm) diameter offset collection bowl gives you a 31 inch (79 cm) total reach.

Superior Maneuverability

Wider and thicker handle for comfort.

Easy to Drain

Pressurize using shop air for easy oil evacuation.

Large 24-Gallon (90 l) Capacity Receiver

Perfect for small to large shops without an evacuation system.

Liquid Sight Gauge

Easy-to-read tank-level gauge lets you know when the tank is full.

Large Casters

Easily move around rough shop floors.



TYPICAL APPLICATIONS

- Automotive dealerships
- Fast lube centers
- Service shops
- Heavy-duty dealerships
- Fleet services facilities

TYPICAL FLUIDS

- Used oil

TECHNICAL SPECIFICATIONS

Fluid	Used oil
Fluid Capacity	24 gallon (90 l)
Evacuation	Pressurized
Receiver Material	Steel
Length	24 in (61 cm)
Width	16 in (40.6 cm)
Height	56 to 80 in (143.5 to 203 cm)
Funnel Size	24 in (61 cm) diameter
Dry Weight	74 lb
Instruction Manual	310864

ORDERING OPTIONS

Part Number	Description
119577	24 gal (90 l) steel-tank pressurized oil drain



OIL ACE® – USED OIL EVACUATION

VACUUM-ASSISTED OIL COLLECTION SYSTEM

Large-capacity collection systems make removing drain plugs a thing of the past. Oil Ace models with optional sight chamber offer the technician a visual indication of the waste fluid quantity. This technology reduces the threat of costly damages caused by over- or under-torquing or cross-threading drain plugs.

Large Offset Collection Pan

Wide offset collection bowl prevents splashing.

Vacuum Gauge

Ensure peak performance with easy-to-read vacuum gauge.

Sight Glass

Inspect oil quality via large, clear evacuation chamber and verify amount extracted.

Easy to Drain

Pressurize using shop air for easy oil evacuation.

Vacuum Probes

Variety of flexible suction attachments and adapters included.

Large 24 Gallon (90 l) Capacity Receiver

Perfect for small to large shops without an evacuation system.



FLUID RECLAIM EQUIPMENT

TYPICAL APPLICATIONS

- Automotive dealerships
- Fast lube centers
- Service shops
- Heavy-duty dealerships
- Fleet services facilities

TYPICAL FLUIDS





- Used oil

TECHNICAL SPECIFICATIONS

Fluid	Used oil
Tank Capacity	24 gallon (90 l)
Evacuation	Pressurized
Receiver Material	Steel
Length	24 in (61 cm)
Width	16 in (40.6 cm)
Height	39 to 70.8 in (99 to 180 cm)
Funnel Size	23.8 in (60 cm)
Dry Weight	50.7 to 73.2 lbs (23 to 33.2 kg)
Instruction Manual	310864

OIL ACE® – USED OIL EVACUATION

ORDERING OPTIONS

	Part Number	Description
	26C061	24 gal (90 l) steel tank with suction probes and adapters
	26C062	24 gal (90 l) steel tank with suction probes, adapters and sight glass
	26C063	24 gal (90 l) steel tank with suction probes, adapters and oil drain funnel
	26C064	24 gal (90 l) steel tank with suction probes, adapters, sight glass and oil drain funnel

FLUID RECLAIM EQUIPMENT



16-GALLON MOBILE RECEIVER



TYPICAL APPLICATIONS

- Automotive dealerships
- Fast lube centers
- Service shops
- Heavy-duty dealerships
- Fleet services facilities

TYPICAL FLUIDS

- Used oil

TECHNICAL SPECIFICATIONS

Fluid	Used oil
Fluid Capacity	16 gal (61 l)
Evacuation	Gravity
Receiver Material	Steel (239302 does not include drum)
Manual	306449
Length	26 in (66 cm)
Width	23 in (58 cm)
Height	42 to 70 in (107 to 177 cm)
Funnel Size	23 x 23 in (58 x 58 cm)
Dry Weight	40 lb (18 kg)

ORDERING OPTIONS

Part Number	Description
239301*	16 gal (60 l) Oil receiver with steel drum oil receiver
239302	16 gal (60 l) Oil receiver without drum

*Use with evacuation kit 224873 or 24E166. 240832 can be ordered separately for existing diaphragm pump evacuation systems.

FLUID RECLAIM EQUIPMENT

Accessories

FUNNEL KIT

Part Number	Description
243650	Use with 238866, 239301, 239302 and 248632. Includes tray and pipe.

WALL-MOUNTED FUNNEL DRAIN

Part Number	Description
154616	Use with Pedestal Receiver 225272 to open automatic check-valve and drain used oil through wall to waste tank. Drain has 1-1/4 NPT(F) outlet.


DRUM-MOUNTED FUNNEL DRAIN

Part Number	Description
156789	Use with Pedestal Receiver 225272 to open automatic check-valve and drain used oil into standard drum. Funnel drain has 2 in NPT bung fitting for use with 55 gal (210 l) or 16 gal (60 l) drums or 275 gallon (1,100 l) tanks.

ATF DRAIN FUNNEL

Part Number	Description
208009	Use with Pedestal Receiver 225272 to extend funnel reach. Use for draining transmissions. Not equipped with drain plug. 16 in x 24-1/2 in.

BIG HAULER™ TRUCK DRAIN

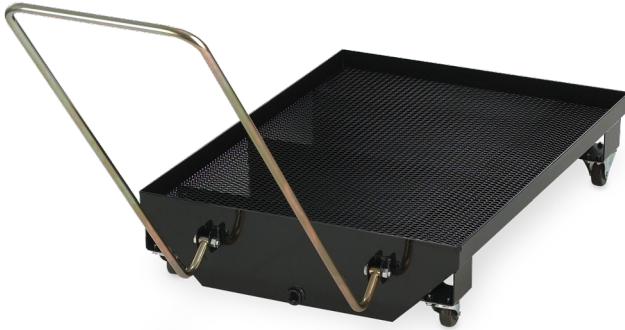

TYPICAL APPLICATIONS

- Truck maintenance facility
- Heavy-duty dealerships
- Fleet services facilities

TYPICAL FLUIDS

- Antifreeze
- Used oil

TECHNICAL SPECIFICATIONS

Fluid	Antifreeze / Oil
Fluid Capacity	26 gal (98.4 l)
Evacuation	Gravity
Receiver Material	Steel
Length	42 in (106.7 cm)
Width	30 in (76.2 cm)
Height	9 to 11 in (22.9 to 27.9 cm)
Instruction Manual	309194

ORDERING OPTIONS

Part Number	Description
244055*	Big Hauler truck drain specially designed for truck maintenance facilities

*Use with evacuation kit 224873 or 24E166. 240832 can be ordered separately for existing diaphragm pump evacuation systems.

TRACK RECEIVERS



TYPICAL APPLICATIONS

- Fast lube centers
- Fleet services facilities

TYPICAL FLUIDS

- Used oil

TECHNICAL SPECIFICATIONS

Part Number	218969	235346
Fluid	Oil	Oil
Fluid Capacity	30 gal (113 l)	27 gal (102 l)
Evacuation	Gravity	Gravity
Receiver Material	Steel	Steel
Extension Range	37.5 to 46 in (0.95 to 1.17 m)	34.1 to 42.6 in (0.87 to 1.08 m)
Instruction Manual	307727	307727

ORDERING OPTIONS

Part Number	Description
218969	Specially designed for car and truck fast lube facilities where speed and mobility are important. Adjustable steel rollers fit track widths.
235346	Narrow rolling used-oil receiver, specially designed for car and truck fast lube facilities where speed and mobility are important. Adjustable steel rollers fit track widths. Same as 218969 except track width range.



DIAPHRAGM EVACUATION PUMPS

TYPICAL APPLICATIONS

- Automotive dealerships
- Fast lube centers
- Service shops
- Heavy-duty dealerships
- Fleet services facilities

TYPICAL FLUIDS

- Used oil



Husky 1050



Husky 716

TECHNICAL SPECIFICATIONS

	Husky 716	Husky 1050
Maximum Fluid Working Pressure	100 psi (7.0 bar / 0.7 MPa)	100 psi (7.0 bar / 0.7 MPa)
Approximate Free Flow Rate @ 100 psi	16 gal/min (61 l/min)	50 gal/min (189 l/min)
Output per Cycle	0.04 gal (0.15 l)	0.17 gal (0.64 l)
Air Inlet	1/4 in	1/2 in
Fluid Inlet	3/4 in	1 in
Fluid Outlet	3/4 in	1 in
Maximum Pump Speed	400 cpm	275 cpm
Cycles per Gallon	25 cpg	5.9 cpg
Cycles per Liter	6.7 cpl	1.6 cpl
Wetted Parts	Buna-N, acetal, aluminum, stainless steel, PTFE, zinc-plated steel	Aluminum, TPC-ET, acetal, PTFE, Buna-N
Sound Pressure Level	85 dB(A)	96 dB(A)
Sound Power Level	95 dB(A)	90 dB(A)
Approximate Weight	8.5 lb (3.9 kg)	23 lb (10.5 kg)
Instruction Manual	308573	313597

ORDERING OPTIONS

Part Number	Description
241906	Husky 716 Evacuation Pump
647731	Husky 1050 Evacuation Pump


EVACUATION PUMP PACKAGES

ORDERING OPTIONS

WALL MOUNT PACKAGES



Package Number	24E166	25T815	224873
Diaphragm Pump	1050A (1 in) UL-listed	1050A (1 in) UL-listed	716 (3/4 in)
Pump Part Number	647731	647016	241906
Mounting Type	Wall Bracket	Wall Bracket	Wall Bracket
Mounting Part Number	24C637	24C637	224835
Fluid	Oil	Antifreeze	Antifreeze / Oil
Evacuation	Drum Adapter	Drum Adapter	Drum Adapter
Evacuation Part Number	240832	240832	240832
Air Installation Kit	240684	240684	240684
Fluid Installation Kit	240685	240685	240685
Instruction Manual	313597	313597	308719
Listings	UL, CE	UL, CE	-

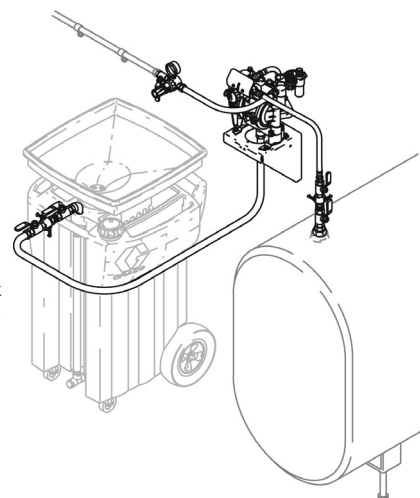

Package 224873 installed on Oil King and tank (neither included in package).



ORDERING OPTIONS

BASE PUMP PACKAGES

System evacuates lube from differential case using suction generated by a diaphragm pump. Nylon tubes ranging in size from 3/16 in OD to 1/2 in OD are included to fit through sight plug to completely drain the case. Evacuated gear lube is then pumped to waste tank. Piping and waste tank not included. Systems are fully groundable and bondable for safe transfer of used oil.



Package Number	224955	24E167	223695
Diaphragm Pump	716 (3/4 in)	1050A (1 in)	716 (3/4 in)
Pump Part Number	241906	647731	241906
Mounting Type	Base	Wall Bracket	Cart Hanger Bracket
Mounting Bracket/Kit	-	24C637	223697
Fluid	Gear Lube	Gear Lube	Gear Lube
Evacuation	Suction Wand	Suction Wand	Suction Wand
Evacuation Part Number	221146	221146	223696
Air Control Kit	110149	221147	-
Instruction Manual	308573	313597	308035 / 308573
Listings	CE	UL, CE	-
Notes	Order additional suction hose/wand (221146) and additional control valve (220969) for each additional suction point. Order grounding clamp (222011) or use locally supplied grounding wires and clamps in accordance with applicable codes.	Order additional suction hose/wand 221146 and additional control valve 220969 for each additional suction point. Order grounding clamp 222011 or use locally supplied grounding wires and clamps in accordance with applicable codes. See instruction manual 313597 for more information.	-


EVACUATION PUMP PACKAGES

ORDERING OPTIONS

FAS-VAC MOBILE PACKAGES



Package Number	224700	224701
Cart	224665	111470
Compatible Drum Size (Not included)	16 gal (60 l)	55 gal (200 l)
Pump	716 (3/4 in)	716 (3/4 in)
Pump Package	224667	224667
Fluid	Oil, Gear Lube	Oil, Gear Lube
Evacuation Kit	224669 / 224666	224702 / 224666
4-Way Valve	187359	187359
Port Size	1/2 NPT(F)	1/2 NPT(F)
Instruction Manual	308154	308154
Must be ordered separately (Not Included)		
Filter Regulator Lubricator (FRL)	110149	110149
FRL Mounting Kit	224759	224759

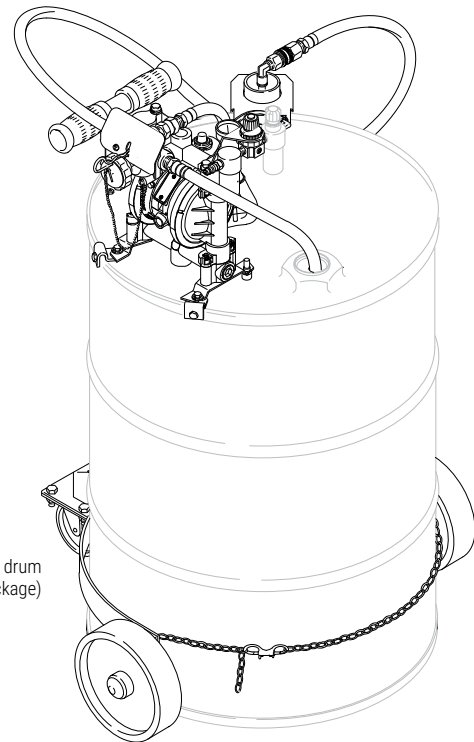

Package 224701 installed on oil drum
(Drum and filter regulator not included in package)




FLUID RECLAIM ACCESSORIES

ORDERING OPTIONS

4-WAY EVACUATION VALVE

Directional control valve used to simplify the filling and emptying of tanks




Features and Benefits


- Simplifies installation by eliminating need for multiple valves
- Unrestricted flow – no pressure or volume loss
- Two-position tank fill and emptying control
- Tapered, self-seating valve spool for superior sealing performance

Part Number	Description
120581	1 in NPT(F) 4-Way Evacuation Valve
120601	1-1/2 in NPT(F) 4-Way Evacuation Valve

LUBE TRUCK/HOLDING TANK



LUBE TRUCK/BULK WASTE TANK



AIR REGULATORS

Provides precision control of outlet air pressure. Feedback principle provides constant pressure to pump regardless of air demand rate and fluctuations in supply pressure. Additional fittings required (except air regulators with installation kits).

	Part Number	Description
	110318	1/4 NPT(FBE)
	110147	1/4 NPT(FBE) with gauge
	110234	3/8 NPT(FBE)
	109075	3/8 NPT(FBE) with gauge
	202858	3/8 NPT(M) x 1/2 NPSM(F) with gauge
	104266	1/2 NPT(FBE)
	244844	1/2 NPT(FBE) with gauge
	207755	3/4 NPT(FBE)
	244845	3/4 NPT(FBE) with gauge

FLUID RECLAIM ACCESSORIES

ORDERING OPTIONS



AIR FILTERS AND DRAINS

Centrifugal action 1/4, 3/8 and 1/2 NPT (with 20 micron filters); 3/4 NPT having 40 micron filters to remove water and foreign particles from air supply.

	Part Number	Description
	110146	1/4 NPT(FBE) Air Filter. Manual drain.
	106148	3/8 NPT(FBE) Air Filter. Auto-drain.
	106149	1/2 NPT(FBE) Air Filter. Manual drain.
	106150	3/4 NPT(FBE) Air Filter. Manual drain.
	106151	Automatic filter drain float-type, 1/4 NPT(M). Use with 106150, 112859 and 217074.
	127711	Automatic filter drain float-type. Use with 106148 and 106149. Sold in NA only.

INSTALLATION KITS

Installation kits include shut-off valve, regulators, gauges and fittings as necessary for normal installation.


	Part Number	Description
	218316	Installation kits for Fast-Flo, Fire-Ball or Husky 307, and 716 diaphragm pumps
	224512	Installation kits for Mini Fire-Ball 225 and Fire-Ball

FLUID RECLAIM EQUIPMENT



ORDERING OPTIONS

ADDITIONAL ACCESSORIES

	Part Number	Description
	223696	Four interchangeable 15 in (38.1 cm) suction wands. OD options: 3/16 in, 1/4 in, 3/8 in, 1/2 in. For use with part 223695 evacuation pump.
	224702	32 in suction wand. 1/2 in OD.
	224666	36 in suction wand storage kit
	218970	Tandem drain kit connects two rolling receivers for flow-through draining operation. Kit includes connector hose, shut-off valve, pipe nipple and quick-connect nipple. Instruction manual 307727.
	108491	Drain hose kit allows rolling used-oil receiver to be drained directly into the used-oil line. Kit is 24 in (0.6 m) in length with camlock coupler on one end.
	221007	Swing-Arm Drain Kit, used for servicing single rolling used-oil receiver (218969). When used with tandem drain kit (218970) it can service two receivers on a single track. Kit includes swivel elbow (108867), connector hose, dust cap (108203) and male adapter (108202).
	116229	Oil Tank Monitor. Shuts off air to the pump when tank is full.
	223888	6 ft (1.8 m) suction hose for ATF and antifreeze. Includes filter screen. Use with 223695.
	222011	Grounding clamp for all used-oil handling systems. Includes 25 ft (7.6 m) grounding wire.
	187359	4-way valve 1/2 NPT(F) ports

ACCESSORIES


	Page
Air Regulators and Valves	268
Air Valves	269
Hose Fittings	270
Lubrication Hoses	271
Air/Water Hoses	272
Quick Connect Fittings	273
Adapters and Fittings	274-275



AIR REGULATORS AND VALVES


ORDERING OPTIONS

AIR FILTER-REGULATOR

	Part Number	Inlet	Flow Range	Drain Type	Maximum Working Pressure
	133215	1/4 in NPT(MBE)	20 cfm (550 lpm)	Semi-automatic	140 psi (9.65 bar)
	133216	1/4 in NPT(MBE)	63 cfm (1,800 lpm)	Automatic	
	133217	3/8 in NPT(MBE)	77 cfm (2,200 lpm)	Automatic	
	133545	1/2 in NPT(MBE)	106 cfm (3,000 lpm)	Automatic	
133546	3/4 in NPT(MBE)	149 cfm (4200 lpm)	Automatic		

FRL COMBINATION UNITS


Each includes filter, regulator, pressure gauge, lubricator and connection fittings.

	Part Number	Inlet
	110149	1/4 in NPT(FBE)
	110150	3/8 in NPT(FBE)
	217072	1/2 in NPT(FBE)
	217073	3/4 in NPT(FBE)


BLEED-TYPE AIR SHUT-OFF VALVES

Closes air inlet to pump and relieves trapped air pressure down line from valve. Recommended for each pump drop line.

Note: Be certain to install correctly. If installed backwards air will constantly escape from the valve. Maximum pressure of 250 psi (17 bar).

	Thread	1/4 in	3/8 in	1/2 in	3/4 in
	NPT(FBE)	110223	110224	110225	110226
	NPT(MXF) inlet x outlet	-	113333	107142	107141

BALL VALVE-TYPE AIR SHUT-OFF VALVE – NON-PRESSURE RELIEVING

	Part Number	Inlet	Maximum Working Pressure
	208390	1/4 in NPT(MBE)	500 psi
	208393	3/8 in NPT(MBE)	500 psi
	208630	1/2 in NPT(M) x 3/8 in NPT(F)	500 psi
	109077	3/4 in NPT(FBE)	600 psi
	118464	1 NPT(FBE)	600 psi




AIR VALVES

ORDERING OPTIONS


AIR NEEDLE VALVE

Controls pump speed by restricting air flow to pump or other air-operated equipment.

	Part Number	Inlet	Outlet
	205090	1/4 in NPSM(M)	1/4 in NPSM(F)
	206264	1/4 in NPT(M)	1/8 in NPT(F)
	205528	1/8 in NPT(M)	1/8 in NPT (F)


AIR PRESSURE RELIEF VALVE

Prevents pump from operating beyond recommended working pressure by opening at a pre-set maximum air pressure.

	Part Number	Maximum Pressure Rating	Thread
	110065	60 psi (4 bar)	1/4 in NPT(M)
	103347	100 psi (6.9 bar)	1/4 in NPT(M)


AIR PRESSURE GAUGE

Allows visual check of air pressure being supplied to the pump. Rated to 200 psi (14 bar)

	Part Number	Inlet	Color
	110319	1/8 in NPT(M)	Black
	100960	1/4 in NPT(M)	Black
	101180	1/4 in NPT(M)	Chrome


AIR MANIFOLD

Supply several pumps from one supply line. Larger port delivery ensures adequate air flow to all pumps.

	Part Number	Inlet Ports	Inlet Thread	Outlet Thread	Maximum Pressure Rating
	158990	2	1/2 in NPT(F)	3/8 in NPT(F)	5,000 psi

RUNAWAY VALVE

Prevents pump damage by automatically closing the air line to stop the pump when a runaway pump condition occurs.


	Part Number	Inlet
	224040	3/4 in NPT(FBE)

HOSE FITTINGS




ORDERING OPTIONS

BLOW GUNS

Safety Blow Gun tip swivels freely and cannot be removed. Tip pressure will not exceed 30 psi (2 bar), adequate for cleaning. Maximum working pressure 150 psi (10 bar). Use with coupler 208536.


	Part Number	Description	Inlet
	236211	Air blow gun	1/4 in NPT(F)

TIRE INFLATORS

	Part Number	Description	Includes			
			12 in Hose	Swivel Dual-Foot Chuck	Straight-On Chuck	Pop-Out Gauge
	236205	Heavy-Duty Tire-Inflator	Yes	Yes	-	Yes
	236206	Passenger Car Tire Inflator	Yes	-	Yes	Yes
	218545	Tire Chuck with 1/4 in NPT(F) inlet	-	-	-	-

WATER VALVE

Water/Antifreeze Bib is a durable, full-volume dispense nozzle for water, antifreeze and windshield washer fluid. Nitrile rubber seals.

	Part Number	Inlet	Pressure Rating
	180685	1/4 in NPT(F)	100 psi (7 bar)




LUBRICATION HOSES

ORDERING OPTIONS

HEAVY-DUTY REINFORCED LUBRICATION HOSES

For use with grease, oil and undercoating material. Hoses are black, male connections at both ends. Lubrication hoses listed are grounded for static electrical discharge.

	ID Inch (mm)	Max PSI (bar)	Hose Length	Fitting		Part Number		
				End 1 Thread NPT(M)	End 2 Thread NPT(M)			
	1/4 (6.44)	5,000 (345)	12 in (0.3 m)	1/8	1/8	109145		
			30 in (0.8 m)			109148		
			24 in (0.8 m)	3/8	3/8	109147		
			48 in (1.2 m)			1/4	109149	
			72 in (1.8 m)	109150				
			12 ft (3.6 m)	109151				
			15 ft (4.6 m)	109152				
			20 ft (6.1 m)	3/8	109153			
			25 ft (7.6 m)		109154			
			35 ft (10.6 m)	3/8	109156			
			40 ft (12.2 m)		109157			
			50 ft (15.3 m)		109158			
			3/8 (9.5)	4,000 (276)	12 in (0.3 m)	1/4	1/2	109160
					24 in (0.62 m)	3/8	3/8	109161
	48 in (1.2 m)	109162						
	72 in (1.8 m)	109163						
	15 ft (4.6 m)	1/4			1/4	109165		
	40 ft (12.2 m)				3/8	109169		
	50 ft (15.3 m)					109170		
	1/2 (12.7)	3,000 (207)	15 in (0.4 m)	1/2	1/2	110069		
18 in (0.5 m)			220598					
54 in (1.4 m)			220600					
72 in (1.8 m)			220591					
10 ft (3.1 m)			220590					
16 ft (4.9 m)			220592					
20 ft (6.1 m)			220593					
25 ft (7.6 m)			220608					
40 ft (12.2 m)			221092					
50 ft (15.3 m)			221093					
75 ft (22.9 m)			3/4			237861		
3/4 (19.1)			2,250 (155)			18 in (0.4 m)	3/4	3/4
	72 in (1.8 m)	109105						
	10 ft (3.0 m)	111010						


ACCESSORIES

AIR/WATER HOSES

ORDERING OPTIONS

AIR/WATER HOSES

For use with low pressure air and water. Hoses are male NPT at both ends.

	ID Inch (mm)	Max PSI (bar)	Hose Length	Fitting		Part Number
				End 1 Thread NPT(M)	End 2 Thread NPT(M)	
	Fabric-Reinforced 1/4 (6.44)	180 (12.4)	18 in (0.5 m)	1/4	1/4	109123
			4 ft (1.2 m)			109124
			6 ft (1.8 m)			109125
			10 ft (3.1 m)			109126
			25 ft (7.6 m)			109127
			40 ft (12.2 m)			109128
			40 ft (12.2 m)	3/8	1/4	218491
	3/8 (9.5)	180 (12.4)	18 in (0.5 m)	3/8	3/8	204560
			4 ft (1.2 m)			109130
			6 ft (1.8 m)			203320
			10 ft (3.1 m)	109131		
			16 ft (4.9 m)	1/4	3/8	110326
			25 ft (7.6 m)	3/8	1/2	109132
			40 ft (12.2 m)			109134
			60 ft (18.3 m)			109135
	1/2 (12.7)	180 (12.4)	22 in (0.56 m)	1/2	1/2	218093
			4 ft (1.2 m)			110046
			6 ft (1.8 m)			205418
			10 ft (3.1 m)			214656
	1/2 (12.7)	300 (20.7)	25 ft (7.6 m)	1/2	1/2	248312
			50 ft (15.2 m)			248313
3/4 (19.1)	180 (12.4)	18 in (0.5 m)	3/4	3/4	110047	
		4 ft (1.2 m)			158554	
		6 ft (1.8 m)			208610	
		10 ft (3.1 m)			214955	
		25 ft (7.6 m)			208611	




QUICK-CONNECT FITTINGS

ORDERING OPTIONS


QUICK-CONNECT COUPLER

Permits quick, convenient attachment of air supply hoses.

	Part Number	Inlet	Body Size
	208536	1/4 in NPT(F)	1/4 in
	110198	3/8 in NPT(F)	1/4 in
	110199	1/2 in NPT(F)	3/8 in
	110200	3/4 in NPT(F)	1/2 in

QUICK-CONNECT NIPPLE


Allows quick attachment of air supply hoses to pump motor.

	Part Number	Inlet	Body Size
	169967	1/4 in NPT(F)	1/4 in
	169970	1/4 in NPT(M)	1/4 in
	169971	3/8 in NPT(M)	1/4 in
	110196	1/2 in NPT(M)	3/8 in
	110197	3/4 in NPT(M)	1/2 in

ADAPTERS AND FITTINGS

ORDERING OPTIONS


BUSHINGS AND PIPE ADAPTERS – REDUCING, STANDARD AND EXPANDING

	Outlet	Inlet					
		1/8 in NPT	1/4 in NPT	3/8 in NPT	1/2 in NPT	3/4 in NPT	1 in NPT
	1/8 in NPT	150171	159840	156580	-	-	-
	1/4 in NPT	100030	-	150287	159842	-	-
	3/8 in NPT	-	159841	150286	156022	-	-
	1/2 in NPT	-	100206	100081	-	168595	-
	3/4 in NPT	-	100615	100505	100896	-	-
	1 in NPT	-	-	-	100380	158586	-


STREET ELBOWS

	Part Number	Inlet/Outlet
	100840	1/4 in NPT
	155699	3/8 in NPT
	158683	1/2 in NPT
	176393	3/4 in NPT

COUPLING – STANDARD

	Part Number	Inlet
	100451	1/8 in NPT
	113093	1/4 in NPT
	162024	3/8 in NPT
	158581	1/2 in NPT
	100385	3/4 in NPT
	100474	1 in NPT


HEX NIPPLES – STANDARD AND REDUCING

	Male End 2	Male End 1				
		1/4 in NPT	3/8 in NPT	1/2 in NPT	3/4 in NPT	1 in NPT
	1/8 in NPT	151519	156296	159239	-	-
	1/4 in NPT	156971	165198	162449	-	-
	3/8 in NPT	-	156849	-	194048	-
	1/2 in NPT	-	-	158491	157191	-
	3/4 in NPT	-	-	-	175013	158555



ORDERING OPTIONS

SQUARE HEAD PLUG

	Part Number	Inlet
	111697	1/4 in NPT
	100040	3/8 in NPT
	100737	1/2 in NPT
	104663	3/4 in NPT

SWIVEL ADAPTERS*









Rigid End	Swivel End	Straight Swivel Adapter (m x f)	Straight Swivel Adapter (f x f)	90° Swivel Adapter (f x f)	90° Swivel Adapter (m x f)	45° Swivel Adapter (m x f)
1/8 in	1/4 in	208434	-	-	-	-
1/4 in	1/4 in	156823	155570	157676	155541	114030
	3/8 in	157705	-	-	-	-
3/8 in	1/4 in	-	159153	-	155495	-
	3/8 in	155665	156173	155677	155494	161889
	1/2 in	162505	-	159801	217430	-
1/2 in	1/4 in	-	155653	-	-	-
	3/8 in	158256	161077	-	161037	-
	1/2 in	156684	155865	157416	155470	222297
3/4 in	3/4 in	157785	156172	156589	160327	105281
1 in	3/4 in	202965	-	-	-	-
	1 in	160022	158383	-	-	-

*Not a "live" swivel, position is stationary after tightened.

TUBE FITTINGS

Maximum pressure rating of 3,000 psi (207 bar) with appropriate tubing wall thickness.

	Description	Inlet	Tube OD	
			5/8 in	7/8 in
	Tube Union Flow 90° Elbow	-	101012	101376
	Straight Tube Union	-	101009	101340
	Male Connector	3/4 in NPT	-	101339
	Straight Female Connector	1/2 in NPT	101008	-
	Tube Tee with Female Branch	5/8 in NPT	101013	-

GRACO EQUIPMENT WARRANTY

STANDARD GRACO WARRANTY

1-YEAR WARRANTY POLICY

Graco warrants all equipment manufactured by Graco and bearing its name to be free from defects in material and workmanship on the date of sale by an authorized Graco distributor to the original purchaser for use. With the exception of any special, extended, or limited warranty published by Graco, Graco will, for a period of twelve (12) months from the date of sale, repair or replace any part of the equipment determined by Graco to be defective.

This warranty applies only when the equipment is installed, operated and maintained in accordance with Graco's written recommendations. This warranty does not cover, and Graco shall not be liable for general wear and tear, or any malfunction, damage or wear caused by faulty installation, misapplication, abrasion, corrosion, inadequate or improper maintenance, negligence, accident, tampering, or substitution of non-Graco component parts. Nor shall Graco be liable for malfunction, damage or wear caused by the incompatibility of Graco equipment with structures, accessories, equipment or materials not supplied by Graco, or the improper design, manufacture, installation, operation or maintenance of structures, accessories, equipment or materials not supplied by Graco.

This warranty is conditioned upon the prepaid return of the equipment claimed to be defective to an authorized Graco distributor for verification of the claimed defect. If the claimed defect is verified, Graco will repair or replace free of charge any defective parts. The equipment will be returned to the original purchaser transportation prepaid. If inspection of the equipment does not disclose any defect in material or workmanship, repairs will be made at a reasonable charge, which charges may include the costs of parts, labor, and transportation.

THIS WARRANTY IS EXCLUSIVE, AND IS IN LIEU OF ANY OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO WARRANTY OF MERCHANTABILITY OR WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE.

Graco's sole obligation and buyer's sole remedy for any breach of warranty shall be as set forth above. The buyer agrees that no other remedy (including, but not limited to, incidental or consequential damages for lost profits, lost sales, injury to person or property, or any other incidental or consequential loss) shall be available. Any action for breach of warranty must be brought within two (2) years of the date of sale.

Graco makes no warranty, and disclaims all implied warranties of merchantability and fitness for a particular purpose in connection with accessories, equipment, materials or components sold but not manufactured by Graco. These items sold, but not manufactured, by Graco (such as electric motors, switches, hose, etc.) are subject to the warranty, if any, of their manufacturer. Graco will provide purchaser with reasonable assistance in making any claim for breach of these warranties.

In no event will Graco be liable for indirect, incidental, special or consequential damages resulting from Graco supplying equipment hereunder, or the furnishing, performance, or use of any products or other goods sold hereto, whether due to a breach of contract, breach of warranty, the negligence of Graco, or otherwise.

GRACO VEHICLE SERVICE EQUIPMENT EXTENDED WARRANTY



Graco warrants all equipment referenced in this document that is manufactured by Graco and bearing its name to be free from defects in material and workmanship on the date of sale to the distributor. Graco will, for a period as defined in the table on the opposite page from the date of sale, repair or replace equipment covered by this warranty and determined by Graco to be defective. This warranty applies only when the equipment is installed, operated and maintained in accordance with Graco's written recommendations.

This warranty does not cover, and Graco shall not be liable for, general wear and tear, or any malfunction, damage or wear caused by faulty installation, misapplication, abrasion, corrosion, inadequate or improper maintenance, negligence, accident, tampering or substitution of non-Graco component parts. Nor shall Graco be liable for malfunction, damage or wear caused by the incompatibility of Graco equipment with structures, accessories, equipment or materials not supplied by Graco, or the improper design, manufacture, installation, operation or maintenance of structures, accessories, equipment or materials not supplied by Graco.

This warranty is conditioned upon the prepaid return of the equipment claimed to be defective to an authorized Graco distributor for verification of the claimed defect. If the claimed defect is verified, Graco will repair or replace free of charge any defective parts. The equipment will be returned to the original purchaser, transportation prepaid. If inspection of the equipment does not disclose any defect in material or workmanship, repairs will be made at a reasonable charge, which may include the costs of parts, labor and transportation.

THIS WARRANTY IS EXCLUSIVE AND IS IN LIEU OF ANY OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO WARRANTY OF MERCHANTABILITY OR WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE.

Graco's sole obligation and buyer's sole remedy for any breach of warranty shall be as set forth above. The buyer agrees that no other remedy (including but not limited to incidental or consequential damages for lost profits, lost sales, injury to person or property, or any other incidental or consequential loss) shall be available. Any action for breach of warranty must be brought within one (1) year post the warranty period.

GRACO MAKES NO WARRANTY, AND DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, IN CONNECTION WITH ANY ACCESSORIES, EQUIPMENT, MATERIALS OR COMPONENTS SOLD BUT NOT MANUFACTURED BY GRACO.

These items sold but not manufactured by Graco (such as electric motors, switches, etc.) are subject to the warranty, if any, of their manufacturer. Graco will provide purchaser with reasonable assistance in making any claim for breach of these warranties.

In no event will Graco be liable for indirect, incidental, special or consequential damages resulting from Graco supplying equipment hereunder, or the furnishing, performance or use of any products or other goods sold hereto, whether due to a breach of contract, breach of warranty, the negligence of Graco or otherwise.

FOR GRACO CANADA CUSTOMERS

The parties acknowledge that they have required that the present document, as well as all documents, notices and legal proceedings entered into, given or instituted pursuant hereto or relating directly or indirectly hereto, be drawn up in English.

Les parties reconnaissent avoir convenu que la rédaction du présente document sera en Anglais, ainsi que tous documents, avis et procédures judiciaires exécutés, donnés ou intentés à la suite de ou en rapport, directement ou indirectement, avec les procédures concernées.

GRACO VEHICLE SERVICE EQUIPMENT EXTENDED WARRANTY (CONT.)

	Products	Warranty Period	
	Oil King, Coolant King, and Oil Ace	5 Years	
	Pulse Fluid Management Hubs, TLMs, PACs and Extenders	2 Years	
REELS	Cord and Light Reels	2 Years	
	Electrical Components	1 Year	
	LD Series Hose Reels	5 Years	
	Wear Parts, including but not limited to hose, seals, swivel seats and roller guides	1 Year	
	SDX Series Hose Reels	7 Years	
	Power Springs	3 Years	
	Wear Parts, including but not limited to hose, seals, swivel seats and roller guides	1 Year	
	XD Series Hose Reels	7 Years	
	Power Springs	3 Years	
	Wear Parts, including but not limited to hose, seals, swivel seats, roller guides and motors	1 Year	
	METERS	Mechanical Meters	5 years
		Wear parts, including but not limited to o-rings, seals and valves	1 Year
LD Preset Meters		5 years	
Electronics		2 Years	
Wear parts, including but not limited to o-rings, seals and valves		1 Year	
SD Meters and Valves		5 Years	
Electronics		3 Years	
Wear parts, including but not limited to o-rings, seals and valves		1 Year	
EM Meters and Valves / Pulse Meters and Valves		5 Years	
Electronics		3 Years	
Wear parts, including but not limited to o-rings, seals, valves and trigger locks		1 Year	
PUMPS		LD Oil/Grease Pumps	5 Years
	Wear Parts, including but not limited to o-rings, packings and seals	1 Year	
	Hoses with pump packages	1 Year	
	AODD Pumps	5 Years	
	Wear Parts, including but not limited to o-rings, packings and seals	1 Year	
	Hoses with pump packages	1 Year	
	Mini Fire-Ball 225 and Fire-Ball 300 Oil and Grease Pumps	7 Years	
	Wear Parts, including but not limited to o-rings, packings and seals	1 Year	
	Hoses with pump packages	1 Year	
	Fire-Ball 425 Oil and Grease Pumps	10 Years	
	Wear Parts, including but not limited to o-rings, packings and seals	1 Year	
	Hoses with pump packages	1 Year	
	Fast-Ball and Fast-Flo Oil Pumps	5 Years	
	LD Blue and SD Blue Diesel Exhaust Fluid Pumps	2 Years	

INDEX

PART NO.	PAGE NO.	PART NO.	PAGE NO.	PART NO.	PAGE NO.
15C502.....	57, 71	24C637.....	196, 198, 260, 261	24F935.....	42, 49, 55
15M308.....	15, 27	24D132.....	229, 234	24F947.....	174
15T366.....	15, 27, 102	24D133.....	229, 234	24G576.....	19, 27, 39, 41, 42, 43, 45, 46
15T367.....	15, 27, 102	24D147.....	196	24G579.....	39, 42
15T368.....	15, 27, 102	24D205.....	197	24G582.....	39, 40, 47
15T369.....	15, 27, 102	24D596.....	77	24G585.....	39, 44
15T370.....	15, 27, 102	24D597.....	77	24G588.....	39, 48, 49, 50, 51, 52, 53
16A674.....	249	24D598.....	81	24G591.....	39, 49
16A684.....	249	24D599.....	81	24G594.....	39
16A686.....	249, 250	24D601.....	81	24G597.....	39
16A688.....	250	24D602.....	77	24G600.....	119, 120
16A707.....	249	24D603.....	77	24G603.....	119, 121
16F769.....	146	24D604.....	81	24G606.....	119, 122
16F781.....	146	24D605.....	81	24G636.....	175
16F784.....	146	24D608.....	81	24G738.....	105, 173, 176
16F878.....	19, 27, 39, 41, 42, 48, 49, 54	24D989.....	220	24G745.....	172, 173, 174
16F885.....	39, 43, 44, 50, 51, 54	24D990.....	220	24G862.....	122
16F886.....	39, 40, 41, 47, 54	24D991.....	220	24H193.....	221, 225
16G760.....	176	24D992.....	220	24H292.....	176
16N883.....	225	24D993.....	220	24H293.....	174, 176
16P999.....	225	24D994.....	220	24H420.....	19, 27, 37, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 120, 121, 122, 124
17C270.....	58	24D995.....	219	24H422.....	121, 124
17C908.....	184	24D996.....	219	24H606.....	124
17F878.....	18, 19	24D997.....	219	24H666.....	42, 49, 55
17R220.....	15, 26, 101, 110	24D998.....	220	24H669.....	43, 50, 55
17T207.....	15, 26, 96, 99, 101	24D999.....	220	24H689.....	42
18F169.....	99	24E001.....	219	24H695.....	42
18F170.....	99	24E002.....	219	24H702.....	43
18F174.....	99	24E006.....	153	24H704.....	43
18F175.....	99	24E007.....	153	24H726.....	43
18F444.....	180, 215	24E008.....	153	24H728.....	43
18F445.....	180, 215	24E009.....	153	24H751.....	40
18G102.....	21	24E010.....	153	24H753.....	40
18G108.....	31	24E011.....	153	24H775.....	40
18G109.....	31	24E166.....	257, 258, 260	24H777.....	40
20A058.....	18, 19	24E167.....	261	24H799.....	42
24A217.....	220, 224	24E283.....	233, 234	24H800.....	42
24A218.....	220	24E284.....	233, 234	24H801.....	42
24A219.....	229	24E285.....	233, 235	24H802.....	42
24A220.....	229	24E780.....	154	24H836.....	49
24A221.....	229	24E781.....	154	24H842.....	49
24A222.....	229	24E782.....	154	24H858.....	124
24A224.....	230	24E823.....	235	24H859.....	42, 49, 54
24A934.....	221, 224	24E824.....	235	24H862.....	120, 121, 122, 124
24A935.....	221, 224	24F205.....	59	24H865.....	19, 27, 40, 41, 47, 48, 54, 124
24A936.....	221, 224	24F206.....	59	24H868.....	50
24A937.....	221, 224	24F524.....	183	24H870.....	50
24A938.....	221, 224	24F529.....	173, 174, 179	24H892.....	50
24A939.....	221, 224	24F531.....	173	24H894.....	50
24A940.....	220, 224	24F532.....	173, 174, 184	24H915.....	47
24A941.....	220, 224	24F679.....	174, 182	24H916.....	47
24A942.....	220, 224	24F870.....	173, 182	24H917.....	47
24A943.....	220, 224	24F878.....	173	24H918.....	47
24A944.....	220, 224	24F901.....	120, 124, 127, 132, 146	24H940.....	47
24A945.....	220	24F902.....	121, 124, 128, 133, 134, 146	24H941.....	47
24A946.....	220	24F903.....	122, 124, 128, 134, 146	24H942.....	47
24A947.....	220	24F904.....	54, 120, 124	24H943.....	47
24A948.....	220	24F905.....	54, 121, 124	24H964.....	49
24A949.....	220	24F906.....	54, 122, 124	24H965.....	49
24A950.....	220, 224, 230	24F910.....	42, 49, 55	24H966.....	49
24A951.....	220, 230	24F914.....	43, 44, 50, 51, 55	24H967.....	49
24B624.....	198	24F915.....	19, 27, 40, 47, 54, 122, 124	24J030.....	120
24B632.....	198	24F918.....	39, 55, 57	24J036.....	121
24B634.....	198	24F920.....	43, 50, 55	24J042.....	122
24B639.....	198	24F930.....	43, 44, 50, 51, 55	24J048.....	121
24B768.....	198	24F931.....	43, 50, 55	24J054.....	122
24C100.....	221	24F932.....	55		

INDEX

PART NO.	PAGE NO.	PART NO.	PAGE NO.	PART NO.	PAGE NO.
24J060.....	121	24P336.....	239	24T252.....	250
24J066.....	122	24P337.....	239	24T253.....	250
24J487.....	124	24P339.....	239	24T254.....	250
24J495.....	40, 43, 44, 46, 47, 51, 53	24P340.....	239	24T327.....	248
24J501.....	121, 122, 124	24P342.....	239	24T328.....	248
24J733.....	45	24P343.....	239	24T329.....	248
24J734.....	45	24P345.....	239	24T330.....	248
24J735.....	52	24P346.....	239	24T331.....	248
24J736.....	52	24P348.....	239	24T332.....	248
24J776.....	45	24P349.....	239	24T333.....	248
24J777.....	52	24P351.....	239	24T334.....	248
24K285.....	43, 44, 50, 55	24P352.....	239	24T335.....	248
24K777.....	46	24P354.....	239	24T336.....	248
24K796.....	53	24P355.....	239	24T337.....	248
24K797.....	46	24P455.....	240	24T875.....	247
24K798.....	53	24P456.....	240	24T876.....	247
24K799.....	46	24P458.....	240	24T886.....	246
24K800.....	53	24P459.....	240	24T888.....	246
24K834.....	46	24P461.....	240	24T889.....	246
24K835.....	53	24P462.....	240	24T891.....	246
24K836.....	45	24P467.....	240	24T892.....	246
24K837.....	52	24P468.....	240	24T910.....	246
24K838.....	44	24P473.....	240	24T911.....	246
24K839.....	51	24P474.....	240	24U227.....	203
24K842.....	44	24P476.....	240	24U228.....	203
24K843.....	51	24P477.....	240	24U947.....	107
24K860.....	198	24P482.....	240	24U950.....	107
24K901.....	198	24P483.....	240	24U953.....	107
24K932.....	198	24P488.....	240	24U956.....	107
24K937.....	198	24P489.....	240	24U959.....	107
24M499.....	174	24P497.....	240	24V034.....	59, 107
24N323.....	229	24P498.....	240	24V037.....	107
24N324.....	229	24P623.....	124	24V040.....	107
24N325.....	229	24P880.....	225	24V043.....	107
24N326.....	229	24P881.....	225	24V046.....	107
24N327.....	229	24P914.....	230	24V049.....	107
24N328.....	229	24R060.....	241, 248	24V052.....	108
24N331.....	230	24R061.....	241, 248	24V055.....	108
24N332.....	230	24R072.....	241, 248	24V058.....	108
24N333.....	230	24R074.....	241	24V641.....	171
24N334.....	230	24R076.....	241	24V644.....	171
24N336.....	230	24R077.....	241	24V645.....	171
24N337.....	230	24R102.....	250	24V646.....	171
24N339.....	230	24R103.....	250	24V656.....	171
24N340.....	230	24R106.....	250	24V677.....	173
24N341.....	230	24R108.....	250	24V678.....	173
24N343.....	230	24R110.....	250	24V679.....	174
24N444.....	221, 225	24R111.....	239, 240, 241, 248	24V686.....	174
24N674.....	224	24R112.....	239, 241, 248	24W148.....	174, 182
24N675.....	224	24R114.....	250	24W149.....	173, 182
24N682.....	224	24R115.....	239, 240, 241, 248	24W154.....	174, 182
24N683.....	224	24R117.....	240, 241, 248	24W161.....	171, 173, 182
24N684.....	224	24R350.....	58, 62, 71, 127, 128, 132, 133, 134, 145, 154	24W185.....	174
24N685.....	224	24R854.....	239	24W186.....	173
24N686.....	225	24R855.....	239	24W190.....	182
24N690.....	224	24R857.....	239	24W250.....	181, 233, 235
24N691.....	224	24R859.....	239	24W251.....	181, 235
24N814.....	225	24T105.....	246	24W306.....	108
24P164.....	225	24T108.....	246	24W337.....	149
24P317.....	239	24T111.....	246	24W498.....	149
24P318.....	239	24T114.....	246	24W515.....	203
24P320.....	239	24T117.....	246	24W641.....	108
24P322.....	239	24T120.....	246	24Y863.....	223
24P327.....	239	24T123.....	246	24Y864.....	223
24P328.....	239	24T126.....	246	24Y872.....	223
24P330.....	239	24T129.....	246	24Y882.....	223
24P331.....	239	24T132.....	246	24Y883.....	223

INDEX

PART NO.	PAGE NO.	PART NO.	PAGE NO.	PART NO.	PAGE NO.
24Y887.....	223	25N771.....	27	26C401.....	24
24Z125.....	108	25R975.....	13	26C409.....	27
24Z126.....	108	25R976.....	13	26C525.....	95
24Z127.....	108	25R977.....	13	26D776.....	21
24Z128.....	108	25R978.....	13	26D777.....	21
24Z129.....	108	25R979.....	13	26D784.....	21
24Z130.....	108	25R980.....	13	100030.....	274
24Z131.....	108	25R981.....	13	100040.....	275
24Z132.....	108	25T460.....	28	100054.....	164, 165
24Z133.....	108	25T461.....	28	100081.....	274
24Z257.....	19, 27	25T462.....	28	100206.....	134, 274
24Z676.....	17	25T815.....	260	100220.....	70
24Z677.....	17	25T817.....	209	100380.....	274
24Z728.....	17, 19	25T818.....	209	100385.....	274
24Z978.....	19	25T819.....	209	100451.....	274
25A857.....	198	25T820.....	209	100474.....	274
25A874.....	198	25T822.....	209	100505.....	274
25C548.....	121	25U000.....	99	100615.....	274
25C549.....	120	25U085.....	98	100737.....	275
25C550.....	41	25U086.....	98	100833.....	164, 165
25C551.....	41	25U346.....	209	100834.....	164
25C552.....	41	25U369.....	215	100835.....	164
25C553.....	41	25U370.....	180, 215	100840.....	274
25C554.....	48	25U371.....	45, 52, 215	100846.....	164, 165
25C555.....	48	25U372.....	215	100847.....	164, 165
25C556.....	48	25U972.....	12	100848.....	164
25C557.....	48	25V470.....	31	100854.....	165
25C841.....	103	25V471.....	31	100896.....	96, 274
25C903.....	40, 41, 43, 45, 59, 95	25V475.....	31	100960.....	67, 68, 69, 131, 139, 140, 141, 200, 269
25C904.....	40, 45, 47, 53, 95	25V476.....	31	100961.....	69
25C905.....	95	25V477.....	31	100962.....	69
25C915.....	95	25V478.....	31	100970.....	164, 165
25C916.....	95	25V479.....	31	100971.....	164
25C918.....	95	25V482.....	31	101008.....	275
25C919.....	95	25V710.....	19	101009.....	275
25D116.....	149	25V711.....	21	101012.....	275
25D121.....	19, 27	26C061.....	256	101013.....	275
25D130.....	19, 27	26C062.....	256	101078.....	69, 72
25D433.....	95	26C063.....	256	101180.....	269
25D436.....	95	26C064.....	256	101277.....	164
25D437.....	95	26C121.....	249	101281.....	164
25D625.....	19	26C122.....	249	101283.....	164
25D906.....	15, 27, 99	26C123.....	249	101287.....	165
25D934.....	96	26C124.....	249	101312.....	165
25D936.....	96	26C169.....	120	101339.....	275
25M317.....	15, 19, 27	26C170.....	121	101340.....	275
25M318.....	15	26C171.....	122	101376.....	275
25M319.....	15, 19, 27	26C172.....	170	101496.....	73, 206
25M320.....	15	26C173.....	170	101604.....	165
25M323.....	15	26C174.....	170	101605.....	165
25M324.....	15	26C175.....	170	102527.....	74
25M326.....	15, 19, 27	26C183.....	133	103347.....	269
25M328.....	15	26C184.....	133, 144, 160	103538.....	203
25M329.....	15	26C185.....	133	104266.....	67, 68, 69, 139, 141, 263
25M330.....	15	26C186.....	133	104655.....	206
25M404.....	63, 101, 219	26C267.....	15, 26, 96, 99, 101, 107	104663.....	275
25M405.....	101	26C268.....	15, 26, 96, 99, 101, 107	104815.....	206
25M406.....	101, 219	26C354.....	26, 101	105281.....	275
25M407.....	101	26C355.....	26, 101	105474.....	32
25M410.....	101	26C356.....	26, 101	106148.....	63, 69, 120, 121, 122, 197, 264
25M411.....	101	26C357.....	26, 101	106149.....	69, 197, 203, 207, 264
25M413.....	58, 62, 101	26C358.....	26, 101	106150.....	197, 203, 264
25M415.....	101	26C360.....	26, 101	106151.....	264
25M416.....	101	26C361.....	26, 101	107141.....	268
25M417.....	101	26C384.....	26, 63, 101	107142.....	203, 268
25M449.....	19	26C385.....	26, 101	108190.....	195
25N415.....	19	26C399.....	27	108202.....	265

INDEX

PART NO.	PAGE NO.	PART NO.	PAGE NO.	PART NO.	PAGE NO.
108203	265	110226	70, 144, 197, 268	125478	175
108458	32, 69, 71, 105	110234	131, 144, 200, 263	125479	175
108491	265	110236	113	126076	249
108537	67, 69, 71	110237	113	126359	249
108867	265	110285	113	126360	249
109067	144	110314	71	126361	249
109075	58, 59, 62, 63, 64, 69, 127, 128, 132, 133, 134, 135, 136, 140, 141, 144, 263	110318	195, 263	126362	249
109077	268	110319	269	126363	249
109105	72, 73, 196, 206, 271	110326	272	126364	249
109108	72, 206, 271	110702	164	126376	249
109123	206, 272	110703	165	126377	249
109124	272	110705	165	126379	249
109125	195, 196, 206, 272	110706	165	126380	249
109126	272	110709	165	126503	249
109127	272	110710	165	126504	249
109128	272	110711	165	126505	249
109130	272	110713	165	126688	249
109131	272	110877	72	127167	250
109132	272	110878	72	127173	249
109134	272	110906	72	127214	247
109135	272	110907	72	127217	247
109145	144, 160, 163, 271	111010	271	127218	247
109147	271	111470	70, 147, 262	127219	247
109148	147, 160, 163, 271	111620	32	127220	247
109149	271	111697	275	127221	247
109150	128, 134, 135, 136, 144, 271	112119	198	127222	247
109151	127, 128, 132, 133, 144, 271	112174	74	127223	247
109152	271	112196	162	127224	247
109153	271	112197	157	127225	247
109154	133, 144, 271	112198	157	127271	247
109156	271	112255	163	127637	184
109157	271	112859	264	127642	169, 170, 171
109158	249, 271	113053	74	127643	169, 170, 171
109160	271	113093	274	127647	175
109161	271	113333	268	127649	171, 173, 174, 178
109162	271	113497	198	127650	178
109163	74, 139, 140, 141, 142, 143, 144, 271	113859	32	127651	178
109165	131, 144, 271	114017	93	127652	178
109167	131	114030	275	127654	178
109169	271	114558	127, 128, 132, 133, 144, 206	127655	170, 179
109170	271	114829	87	127656	170, 171, 183
110025	32	115042	77, 81, 153, 154, 196	127657	196
110046	272	116229	265	127663	171, 173, 174, 177
110047	272	116306	173, 174, 183	127679	170
110048	77, 81, 272	118464	268	127680	170
110065	269	119577	254	127711	63, 264
110069	271	120581	263	127720	183
110127	74	120601	263	127800	177
110146	69, 195, 197, 264	124398	179	127804	183
110147	69, 173, 174, 196, 197, 263	124461	249	127805	183
110148	69	124470	249	127806	183
110149	69, 261, 262, 268	124541	182	127815	183
110150	69, 268	124548	184	127823	183
110196	197, 273	124549	184	127873	170
110197	197, 273	124550	184	127875	175
110198	131, 144, 273	124581	173, 181, 182, 235	129581	120, 121, 122, 123
110199	197, 273	124603	173, 182	129591	120, 121, 122, 123
110200	197, 273	124671	174, 182	129645	37, 41, 48, 54, 124, 147
110201	162	124875	174, 181, 182, 235	129699	72
110202	162	124963	173, 174, 183	129876	96
110203	162	124964	176	130783	27
110216	162	124965	176	131183	54, 120, 124, 147
110218	162	125014	184	131184	41, 48, 54, 121, 124, 147
110223	69, 70, 144, 173, 174, 196, 197, 268	125074	182	131226	15, 27, 102
110224	69, 70, 136, 144, 197, 268	125078	171, 174, 175, 179	131380	149
110225	67, 69, 70, 143, 144, 196, 197, 268	125079	174, 182	131394	149
		125242	182, 250	131462	15, 21

INDEX

PART NO.	PAGE NO.	PART NO.	PAGE NO.	PART NO.	PAGE NO.
131733	15, 26, 96, 99, 101, 108	161889	275	203664	132
133215	40, 41, 42, 43, 44, 45, 47, 48, 49, 50, 51, 52, 268	162024	274	203688	58, 62, 67, 69, 73
133216	268	162449	274	203697	157, 162
133217	268	162505	275	203701	157
133375	209, 210	165198	121, 274	203702	157
133376	209, 210	168085	74	203703	157
133377	210	168595	274	203857	61, 62, 64, 67
133412	210	169967	273	203872	61, 62, 64, 67
133480	104	169969	206	203876	61, 62, 63
133545	268	169970	121, 197, 273	203976	132, 133
133546	268	169971	127, 128, 131, 132, 133, 144, 273	203987	69, 74, 83
150171	274	171818	74	203992	70
150286	274	172405	70	204072	163
150287	220, 274	175013	274	204076	73
150622	163	176393	274	204082	163
151519	274	176684	70	204083	163
154616	257	180685	220, 270	204084	163
155332	15, 27	180698	230, 235, 241, 248	204095	64, 68
155470	72, 139, 140, 141, 142, 143, 144, 275	183241	146	204121	134
155494	70, 72, 74, 128, 134, 135, 136, 139, 140, 141, 142, 143, 144, 275	183243	146	204130	146
155495	275	186463	146	204134	127, 132
155541	128, 134, 135, 136, 144, 206, 275	186472	32	204144	73, 200
155570	201, 275	187359	262, 265	204204	163
155653	275	187754	70	204254	61, 62, 64, 67
155665	275	188845	73, 206	204264	64
155677	275	190125	195	204351	132
155699	274	191075	70, 74	204353	134
155836	163	191126	74	204385	71, 139, 140, 145
155865	275	191128	74	204461	134, 139, 140
156022	274	191130	74	204467	134
156172	275	191131	74	204560	72, 272
156173	275	191287	93	204574	83, 85, 86, 131, 133, 139, 140, 145, 149, 156, 200, 207
156296	274	191288	93	204741	221, 224, 229
156580	274	191294	93	204867	86
156589	275	191295	93	204897	163
156684	54, 275	194048	274	204929	164
156789	257	194347	197	205054	73
156823	124, 275	196220	139, 140	205090	269
156849	63, 131, 144, 274	196471	113	205102	139, 140
156859	139, 140	200021	164	205337	146
156971	134, 274	200325	160, 163, 164	205339	134, 139, 140
157191	274	200326	58, 62, 67, 71, 83, 85, 128, 131, 134, 139, 140, 145, 149, 156, 200, 207	205394	138, 139, 141
157416	63, 275	200389	147, 159, 160, 161, 163	205395	138, 139, 141, 142, 143
157676	275	201881	164	205418	72, 139, 140, 141, 142, 143, 144, 196, 272
157705	54, 120, 121, 122, 275	202577	127, 128, 131, 132, 133, 144, 147, 160, 201	205528	134, 139, 140, 269
157785	275	202579	161, 163	205532	164
158256	275	202600	161	205554	164
158383	275	202650	164	205568	164
158491	274	202654	165	205582	164
158555	274	202858	197, 263	205592	164
158581	274	202869	146	205626	67
158586	274	202965	275	205699	139, 140
158683	274	203156	70	206197	203
158990	269	203198	163	206199	197
159153	275	203320	72, 128, 134, 135, 136, 144, 272	206264	269
159239	274	203497	163, 164	206405	130, 131, 200
159801	275	203504	163, 164	206496	201
159840	274	203521	221, 224	206502	201
159841	274	203522	221, 224	206655	64
159842	220, 274	203523	221, 224	206656	68
160022	55, 275	203524	221, 224	206699	130, 131, 200
160327	72, 206, 275	203525	221, 224	206700	130, 131, 200
160754	71, 83, 85, 145, 149	203526	221, 224	207361	64, 68, 135, 141, 156
161037	275	203597	163	207366	135, 141, 156
161077	275	203622	58, 62, 73, 86, 128, 133, 147	207367	64, 68
		203650	70, 86, 127, 128, 132, 133, 147	207561	71, 145

INDEX

PART NO.	PAGE NO.	PART NO.	PAGE NO.	PART NO.	PAGE NO.
207562	71, 145	221093	271	224579	64, 68, 73
207579	74	221146	261, 265	224665	262
207651	197	221147	261	224666	262, 265
207755	203, 263	222011	197, 203, 261, 265	224667	262
207946	163	222058	71, 83, 85, 131, 200	224700	262
207947	163	222059	127, 132, 145	224701	262
207948	163	222060	64, 133, 135, 141, 156	224702	262, 265
208009	257	222061	64, 133, 135, 141, 156	224741	82, 83
208390	268	222062	58, 59, 69, 72	224742	82, 83
208393	268	222063	58, 62, 63, 64, 69, 72	224751	155, 156
208434	275	222065	67, 68	224752	155, 156
208536	197, 270, 273	222066	67, 68, 69, 72	224759	262
208610	153, 154, 272	222067	68	224835	195, 196, 198, 260
208611	272	222068	67, 69, 72	224872	147, 160
208630	268	222069	132	224873	252, 253, 257, 258, 260
210881	206	222070	132, 133, 144	224912	155, 156
214570	201	222071	135	224915	156
214583	206	222072	128, 134, 135, 136, 144	224916	156
214656	272	222073	134, 135	224955	261
214658	86	222074	134	225006	133
214847	69	222075	141	225014	134
214848	69, 203, 207	222076	139, 140, 141, 142, 143, 144	225016	134
214849	203	222077	200	225026	133
214926	163	222078	131	225094	62
214955	272	222079	200	225272	257
215407	32	222080	131, 144	225376	86
215474	32	222081	131, 144	225378	86
215475	32	222086	64	225380	86
215481	32	222087	61, 62, 67	225384	86
215487	32	222095	67, 68	225640	62
217072	67, 69, 268	222103	37	225642	62
217073	268	222118	69, 206	225728	62
217074	264	222119	206	225773	132
217359	206	222225	220, 229, 234	225781	139
217430	275	222243	70, 133, 147	225782	67
218093	72, 272	222245	133	225786	67
218115	37	222297	275	225827	132
218316	37, 206, 264	222308	59, 62, 63, 69, 70, 138	225844	157
218334	203	222383	133, 144	225852	62
218340	220, 229, 234	222629	113	225853	67
218341	220, 229, 234	222645	113	225880	86
218491	272	222916	197	225914	157
218545	220, 270	223107	141	225931	62
218549	45, 52, 59, 63, 218, 219, 220, 228, 229, 233, 234, 235	223108	139	226012	132
218550	218, 219, 220, 228, 229	223179	32, 105	226013	134
218588	32	223187	164	226018	139
218903	72	223344	139, 140, 141, 146	226269	200
218969	258, 265	223448	113	226289	87
218970	265	223695	261, 265	226290	87
220107	114	223696	261, 265	226342	200
220112	114	223697	261	226942	205
220170	131	223700	146, 149, 156	226945	205
220171	131	223701	146, 149, 156	233807	132, 133, 159
220590	271	223845	135, 146	233933	159
220591	70, 72, 271	223846	139, 140, 141, 146	234237	200, 201
220592	271	223888	195, 265	235346	258
220593	271	223952	153	235998	69, 74
220596	195	224040	73, 269	236054	69, 73, 196, 197, 206
220598	63, 72, 271	224266	142	236058	127, 128, 144
220600	271	224417	220, 229	236171	164
220608	271	224444	230, 235	236205	270
220653	127, 132, 146	224458	201	236206	270
220654	127, 133, 135, 146	224459	201	236211	270
220969	261	224469	201	236273	198
221007	265	224512	58, 62, 264	236753	82, 83
221092	271	224534	63	236754	84, 85
		224541	63	236763	32

INDEX


PART NO.	PAGE NO.	PART NO.	PAGE NO.	PART NO.	PAGE NO.
236764	32	240685	260	247715	110
236778	74, 83, 85	240718	71	247716	110
236864	83, 85, 156	240832	257, 258, 260	247717	110
237075	58, 62, 70	241633	63	247718	112
237160	195	241657	198	247721	112
237161	195	241663	71, 145	247722	112
237211	197	241906	186, 191, 196, 198, 259, 260, 261	247723	112
237526	67	242055	147, 160	247724	112
237601	69, 74	242056	127, 128, 131, 132, 133, 144, 147, 160	247725	112
237653	82, 83	242057	147, 160	247759	93
237861	271	242058	147, 160	247760	93
237872	220, 229, 234	243161	201	247890	81
237873	229, 234, 241, 248	243650	257	247891	81
237874	229, 234, 241, 248	243669	186, 190, 196, 198	247894	81
237893	32, 63, 69, 74	243817	141	247895	81
237904	83	243818	141	247979	154
237932	241	243835	93	247980	154
238108	67	243836	93	247981	154
238125	70	243837	93	248097	57, 58, 59
238245	67, 69, 74	244038	63	248230	58
238246	69, 72	244055	258	248296	74
238247	72	244342	32	248312	272
238370	70, 74	244628	67	248313	272
238371	92	244635	140, 143	248324	74
238428	196, 198	244636	140, 143	248622	59
238429	71	244637	140	248623	59
238431	71	244644	136	248632	253, 257
238432	71	244645	136	249440	19, 113
238433	71	244657	153, 154	249615	128
238434	71	244679	196	255143	77, 81
238436	201	244680	196	255277	40, 42, 47, 49, 92
238438	201	244681	196	255349	70
238440	201	244682	196	255460	110
238592	74	244844	142, 143, 144, 196, 197, 263	255461	15, 110
238593	74	244845	263	255470	15, 26, 96, 99, 101, 110
238595	74	244846	67	255793	96, 99, 112
238596	74	244847	67	255852	15, 26, 96, 99, 101, 108
238866	252, 257	244905	142	255853	15, 26, 96, 99, 101, 108
238887	92	244906	142, 143	255854	15, 26, 96, 99, 101, 107, 108
238899	198	245694	132	255855	96, 99, 108
238909	197	245695	132	255856	96, 99
238996	32	245696	133	255857	15, 26, 101, 110
239019	32	245697	133	255858	15, 26, 101, 110
239301	257	246775	57, 58, 59	255859	112
239302	257	246780	126, 128	255885	102
239663	201	246781	126, 128	255921	112
239705	86	246903	58	256164	108, 110
239706	114	246904	58	256215	42, 46, 47, 48, 49, 50, 52, 53, 59
239707	86	246906	58	256216	40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 92
239729	138, 140, 141	246907	58	256719	19, 27
239730	138, 140, 141, 142, 143	246909	126, 127	257350	93
239731	138	246910	127	257351	93
239829	92	246911	127	257435	142
239877	130, 132	246913	127	257539	19
239887	130, 133, 134, 135, 136	246914	128	258693	44, 49, 51, 52
239888	130, 134, 135, 136	246916	128	258694	92
239949	92	246917	128	260061	209
239950	92	247335	142	260124	210
239951	92	247337	142	260238	210
239952	198	247355	142	273079	15, 101
239965	144	247443	155, 156	273156	98
239966	144, 201	247450	155, 156	273157	98
240416	93	247453	105	273158	98
240417	32, 69, 71	247540	155	273165	98
240429	69, 74	247712	37, 110	273166	98
240453	93	247713	110	273167	98
240684	260	247714	110		

INDEX

PART NO.	PAGE NO.	PART NO.	PAGE NO.	PART NO.	PAGE NO.
273168	98	HNLC8#	234		
273181	99	HNLD5#	234		
279036	37	HNMC8#	234		
279037	37	HNMD5#	234		
286517	200, 201	HNMDD#	234		
512874	136, 143, 145	HNPB8#	234		
514150	32	HNPC5#	234		
647016	186, 188, 196, 198	HPH5D#	219		
647648	186, 188, 198	HPH55#	218		
647731	186, 188, 198, 259, 260, 261	HPL5J#	218		
652002	186, 194, 198	HPL6D#	219		
948392	143, 145	HPL23#	218		
948393	136, 145	HPL23B	220		
965124	138	HPL25#	218		
965129	138	HPL25B	220		
2000726	37	HPL33#	218		
2000727	37	HPL33B	220		
2004991	15	HPL56#	218		
2005948	209	HPL65#	218		
2006727	21	HPM6D#	219		
2006728	21	HPM6H#	44, 45, 46, 51, 52, 53, 59, 63, 218		
2006744	21	HPM33#	218		
2006845	21	HPM33B	46, 53, 59, 63, 219		
2006857	21	HPM65#	218		
2006858	21	HSDD5#	233		
2006859	21	HSDD5B	181		
2006860	21	HSDD5F	181		
2006861	21	HSDDD#	233		
2006862	21	HSDDDB	181		
2007428	16	HSDDDF	181		
2008088	155, 156	HSH5D#	228		
2008242	184	HSH55#	228		
2009326	15	HSHB7#	233		
CM2L5N	154	HSHC5#	233		
CM2RBA	154	HSHCD#	233		
CM2RBN	154	HSHFF#	233		
CM17BN	154	HSL6D#	228		
CM53BN	154	HSL56#	228		
CM152B	154	HSL65#	228		
CM155N	154	HSLC8#	233		
CM515N	154	HSLD5#	233		
DOB005	198	HSLE3#	233		
DOB020	198	HSM6D#	228		
DOB500	198	HSM65#	228		
DOB525	198	HSM65B	233		
DOF005	198	HSMC8#	233		
DOF020	198	HSMCF#	233		
DOF500	198	HSMD5#	233		
DOF525	198	HSMDD#	233		
D03005	198	HSPB8#	233		
D03050	198	NXT306	77, 153		
D03200	198	NXT606	153		
D03255	198	P14DCS	153		
D05007	198	P26DCS	153		
D05070	198	P29DCS	153		
D05200	198	P55DCS	153		
D05277	198	P63DCS	153		
D31255	186, 189, 195, 198	P68DCS	153		
DB3525	186, 192, 198	SDM65B	45, 59		
DF3525	186, 193, 198				
HEH006	121, 122, 215				
HEL010	215				
HEL015	180, 215				
HEM004	40, 43, 45, 47, 50, 52, 215				
HNHB7#	234				
HNHCD#	234				
HNHFF#	234				



MOVING MATERIALS THAT MATTER™



For more information visit [graco.com](https://www.graco.com)

©2026 Graco Inc. 303245 EN - A0 2/26 All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice. Trademarks are referenced herein for identification purposes only. All trademarks are the property of their respective owners. Product covered by issued and pending patents, see [graco.com/patents](https://www.graco.com/patents).